


4

3

2

1

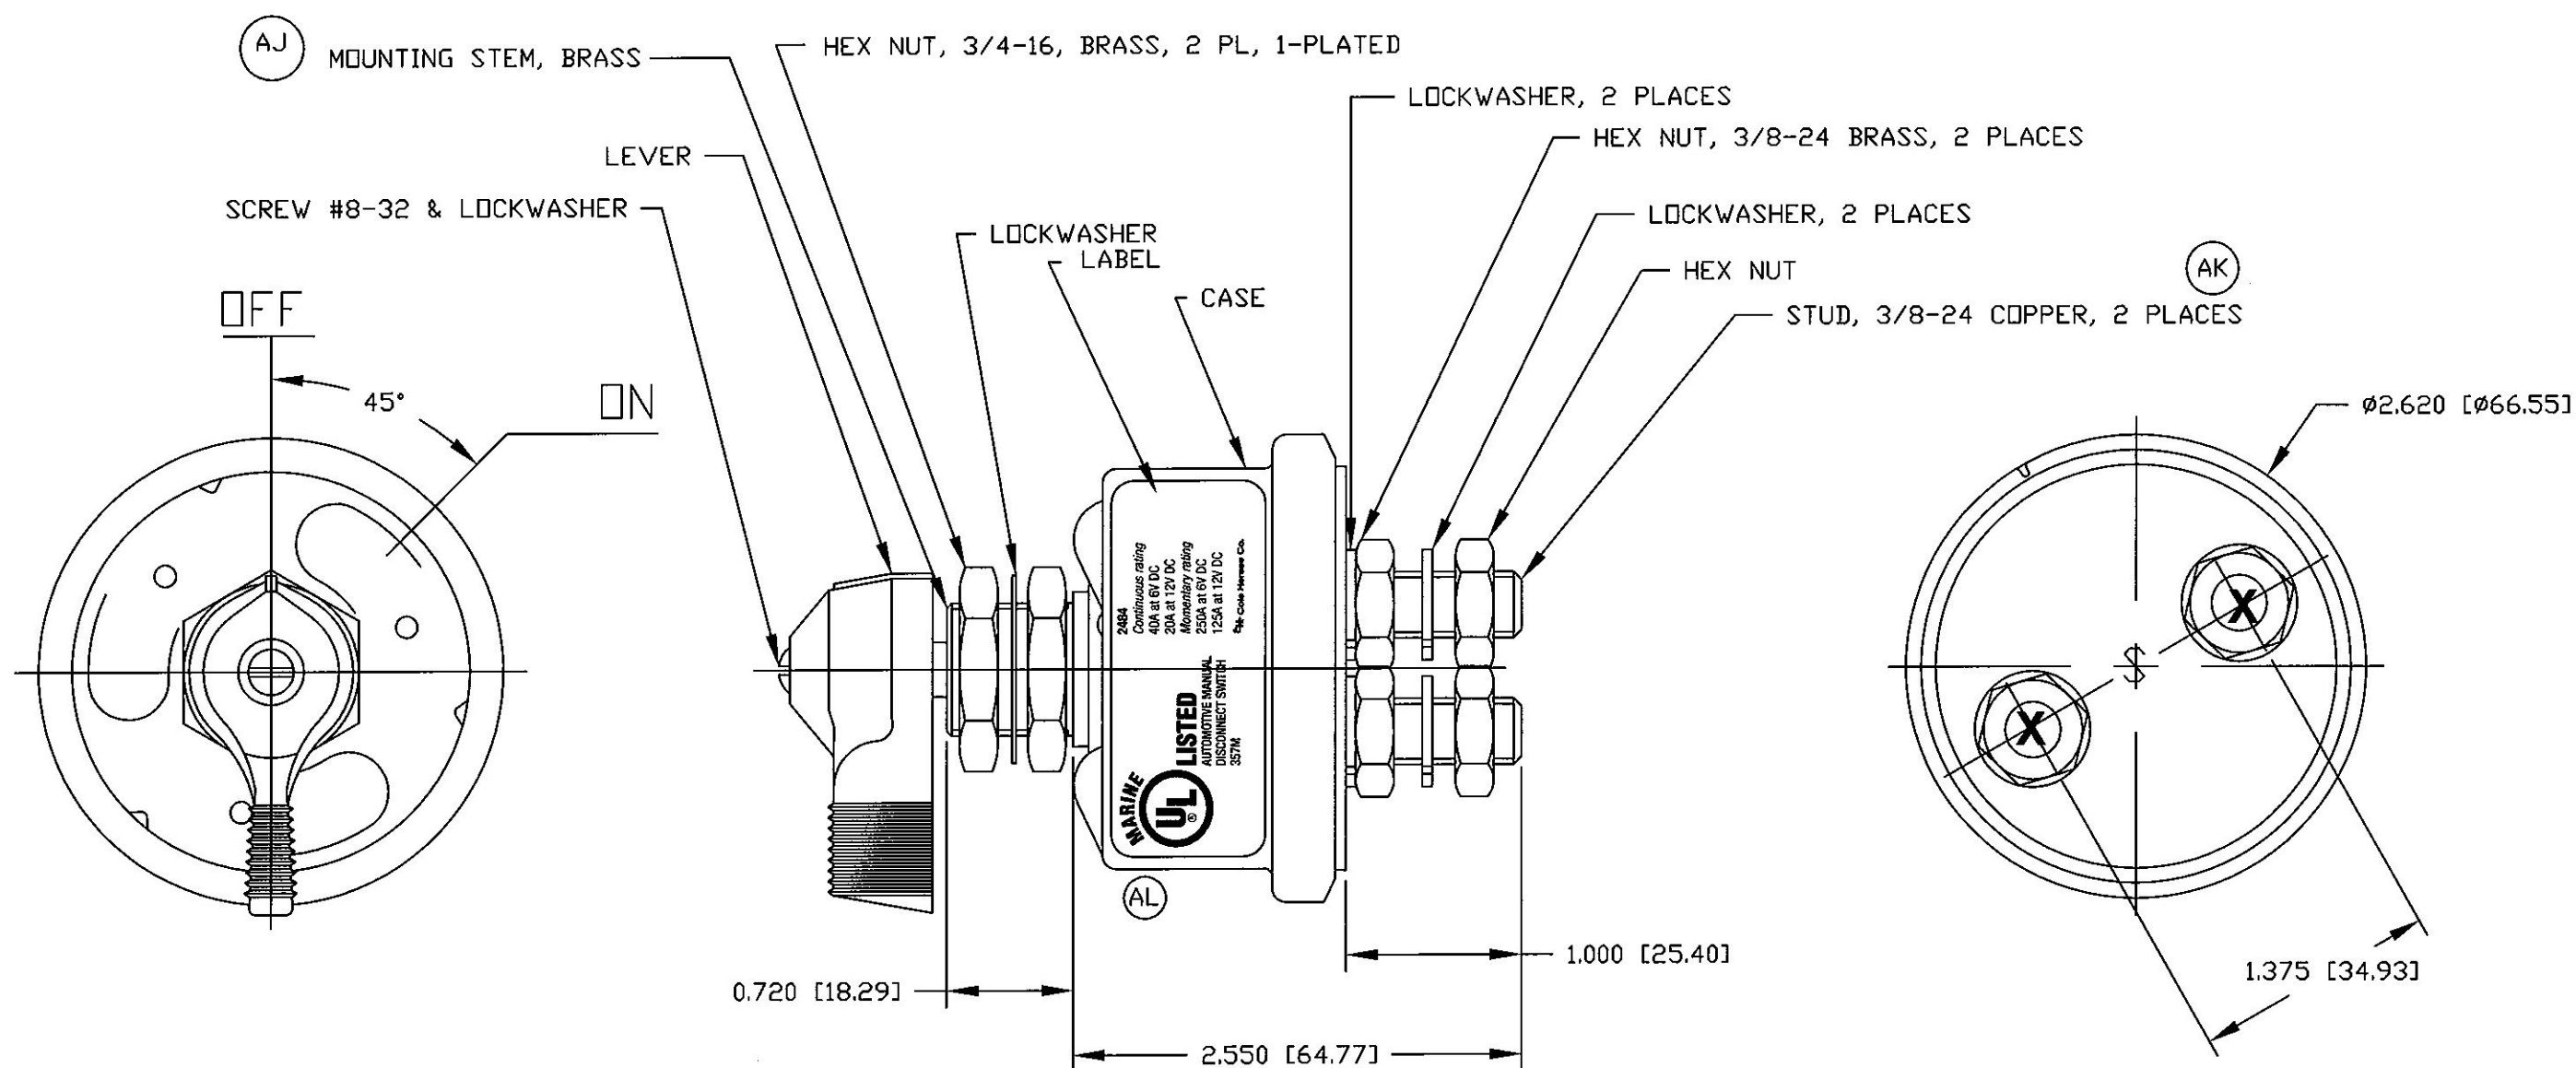

NOTES:

1. ALL STEEL PARTS PLATED
2. ALL DIMENSIONS REF. ONLY
3. SWITCH IS ASSEMBLED
4. TORQUE SPECIFICATIONS:
MOUNTING STEM NUTS: 20 FT LBS [27 N.m] MAX
3/8" NUTS 70-90 IN LBS [8-10 N.m]
5. RATING: 250A AT 6 VDC; 125A AT 12 VDC INTERMITTENT;
40A AT 6VDC, 20A AT 12 VDC CONTINUOUS

(AJ)

Revision Control Record				Rev.	Description of Change	ECN No.	Date	Tolerances Unless otherwise specifically noted, the following are default tolerances;			PROPRIETARY INFORMATION This Engineering Drawing, and the information contained herein, is proprietary to Cole Hersee Company and may not be disclosed, re-produced, or in any other way transferred or communicated to any other party without the express written consent of an authorized representative of Cole Hersee Company.			Special Characteristics:			Cole Hersee Co. 20 Old Colony Ave., South Boston, MA, 02127 Phn: 617-268-2100 Web: www.colehersee.com											
Rev.	Description of Change	ECN No.	Date					2-places +/- 0.02"	3-places +/- 0.005"	Angular +/- 1°	Metric: Shown in [] refers to equivalent English Dim Tol "REF." or an Asterisk (*) = Non-Toleranced Reference Dimension, shown for clarification purposes only. NOTE: All tolerances are Non-Cumulative.			CC	Critical Characteristic, relating to Safety and/or Regulatory Compliance		X	Significant Characteristic relating to Process Control		KC	Control Dimension relating to Form - Fit - Function as defined by Cole Hersee Company and/or the Customer		Description: SWITCH MASTER DISCONNECT		Drawing / Part No.: 2484		Current Rev. AL	
AH	DELETE NOTE 3	07179	05/18/07											Scale: 1:1	Drawn BY: EA	Date Drawn: 12/27/55	Pg. 1 of 1											
AJ	ADDED NOTES	08680	11/25/08								FORM CHT-6 (2/07)			Used On or Ref.:														
AK	ADDED "X" TO STUD TOP	09563	12/7/09																									
AL	UPDATED LABEL	10014	1/13/10																									

4

3

2

1