

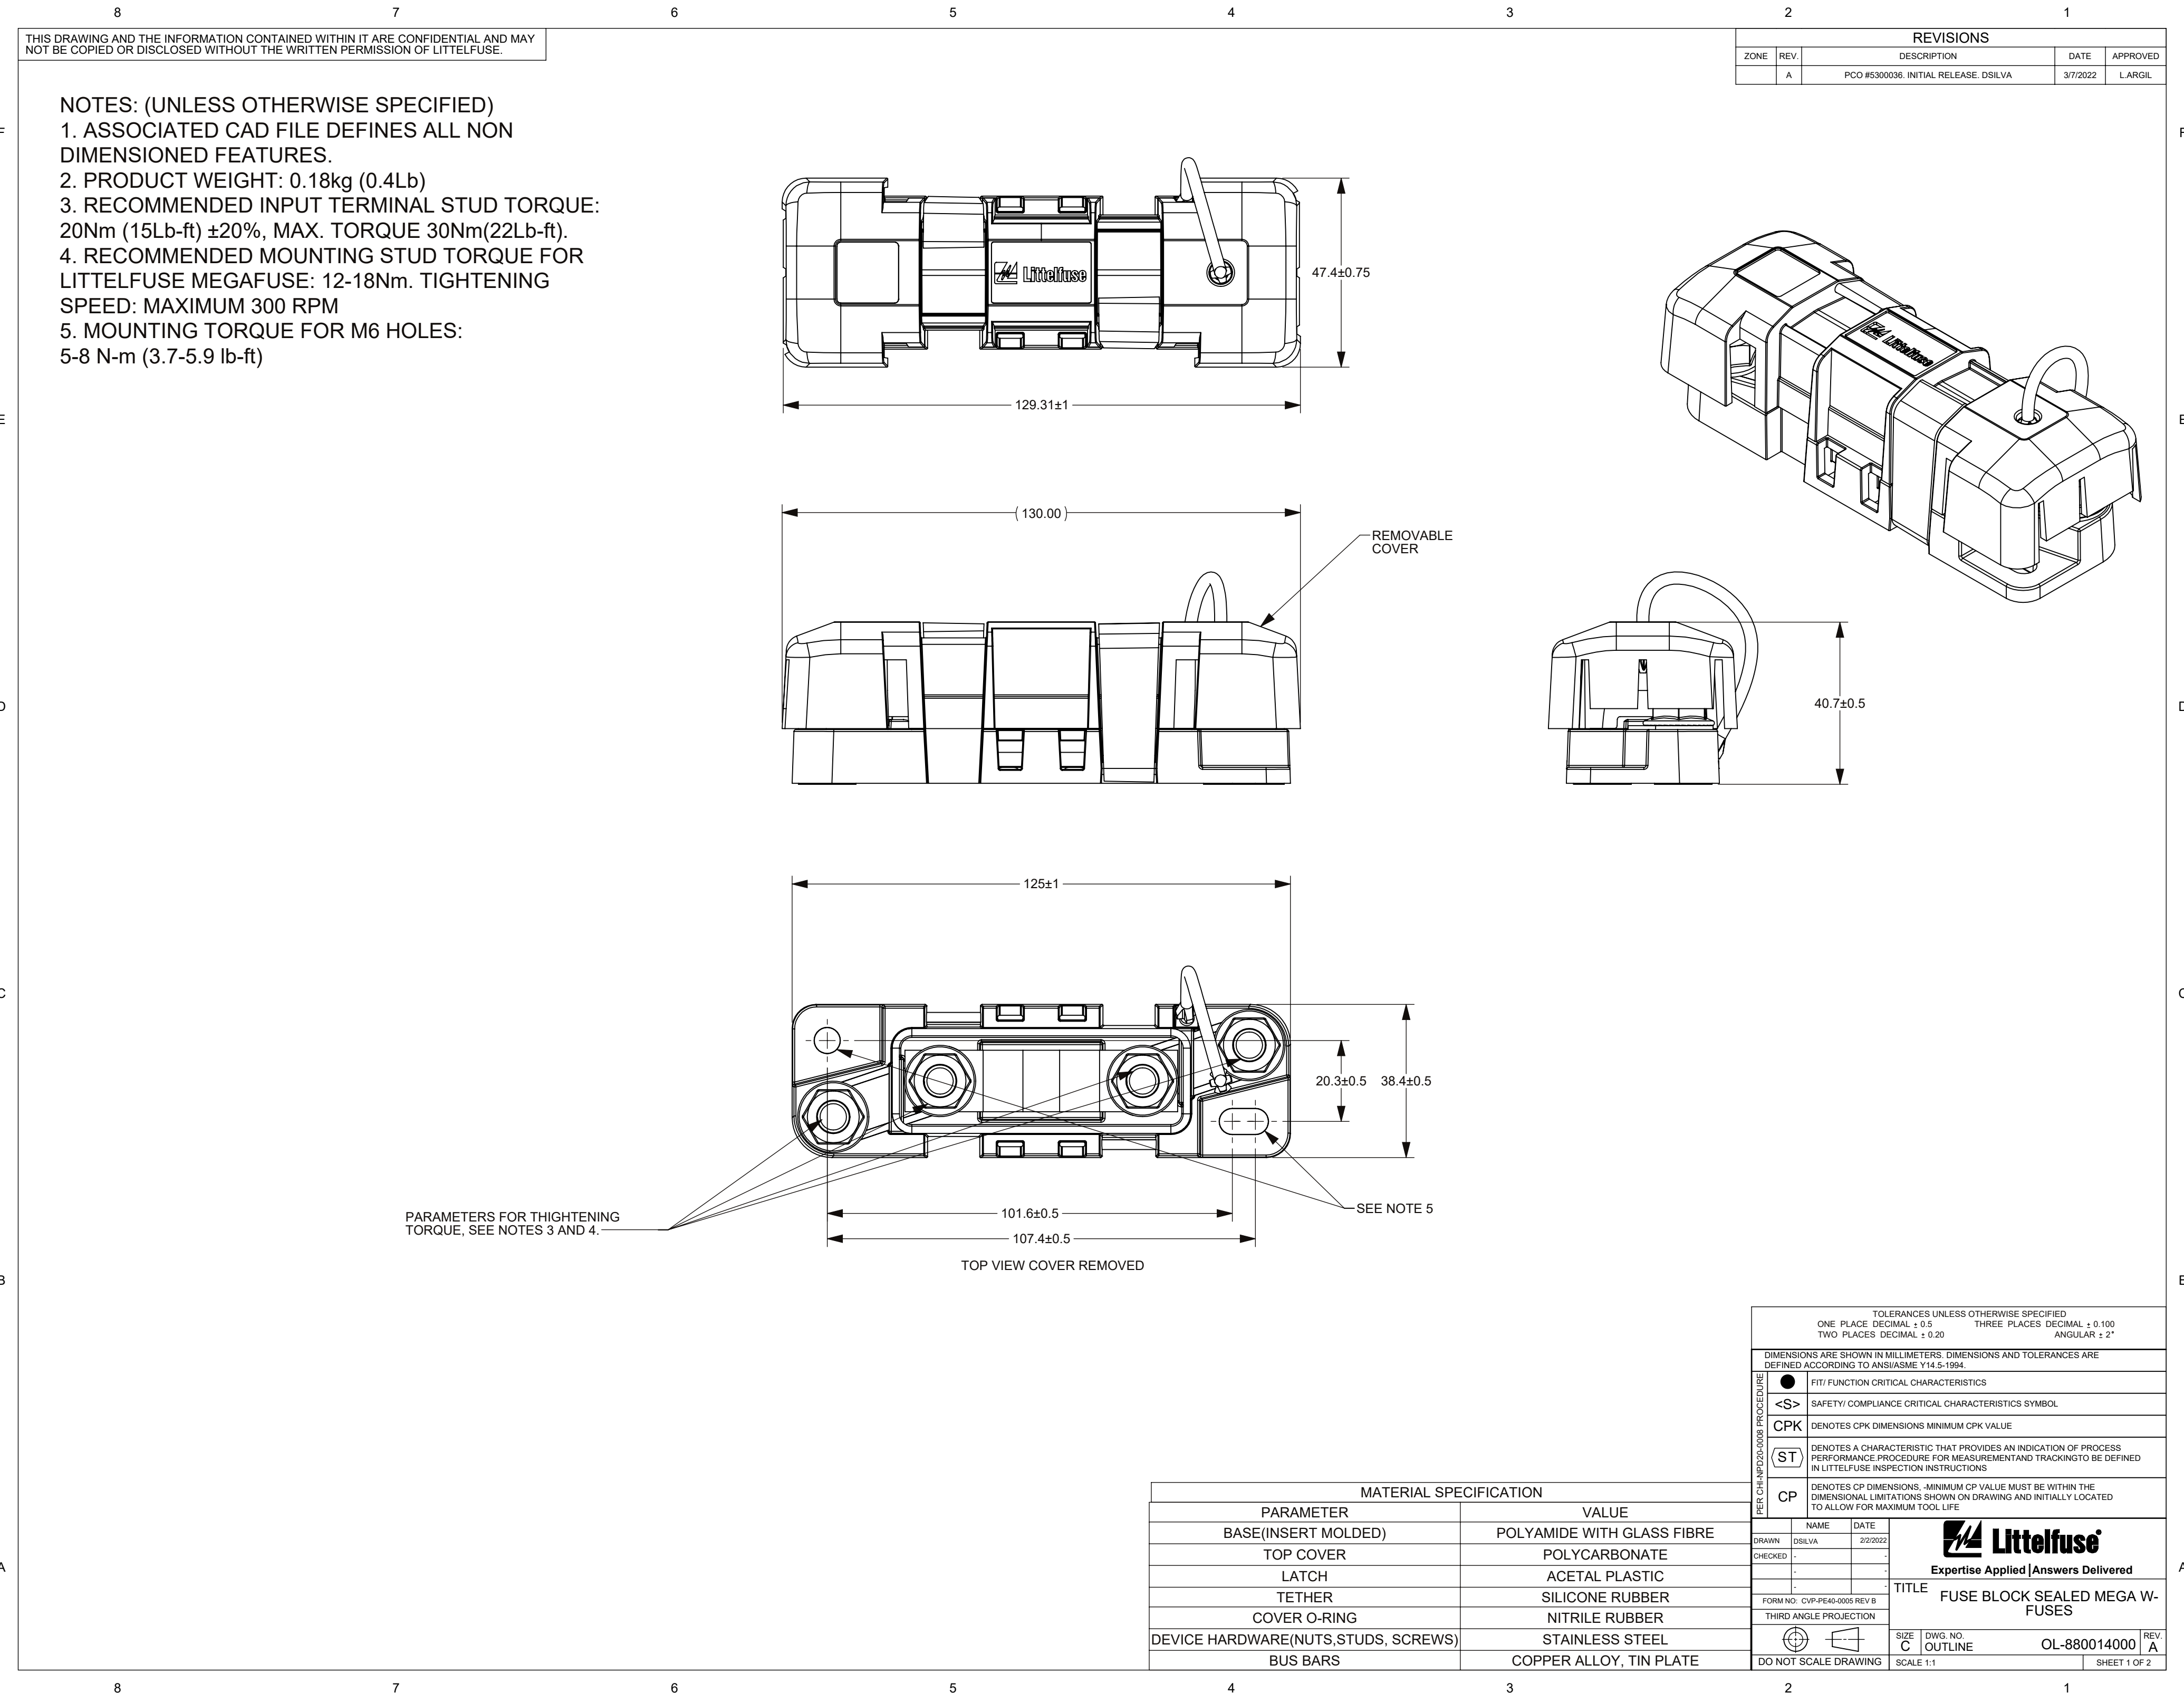


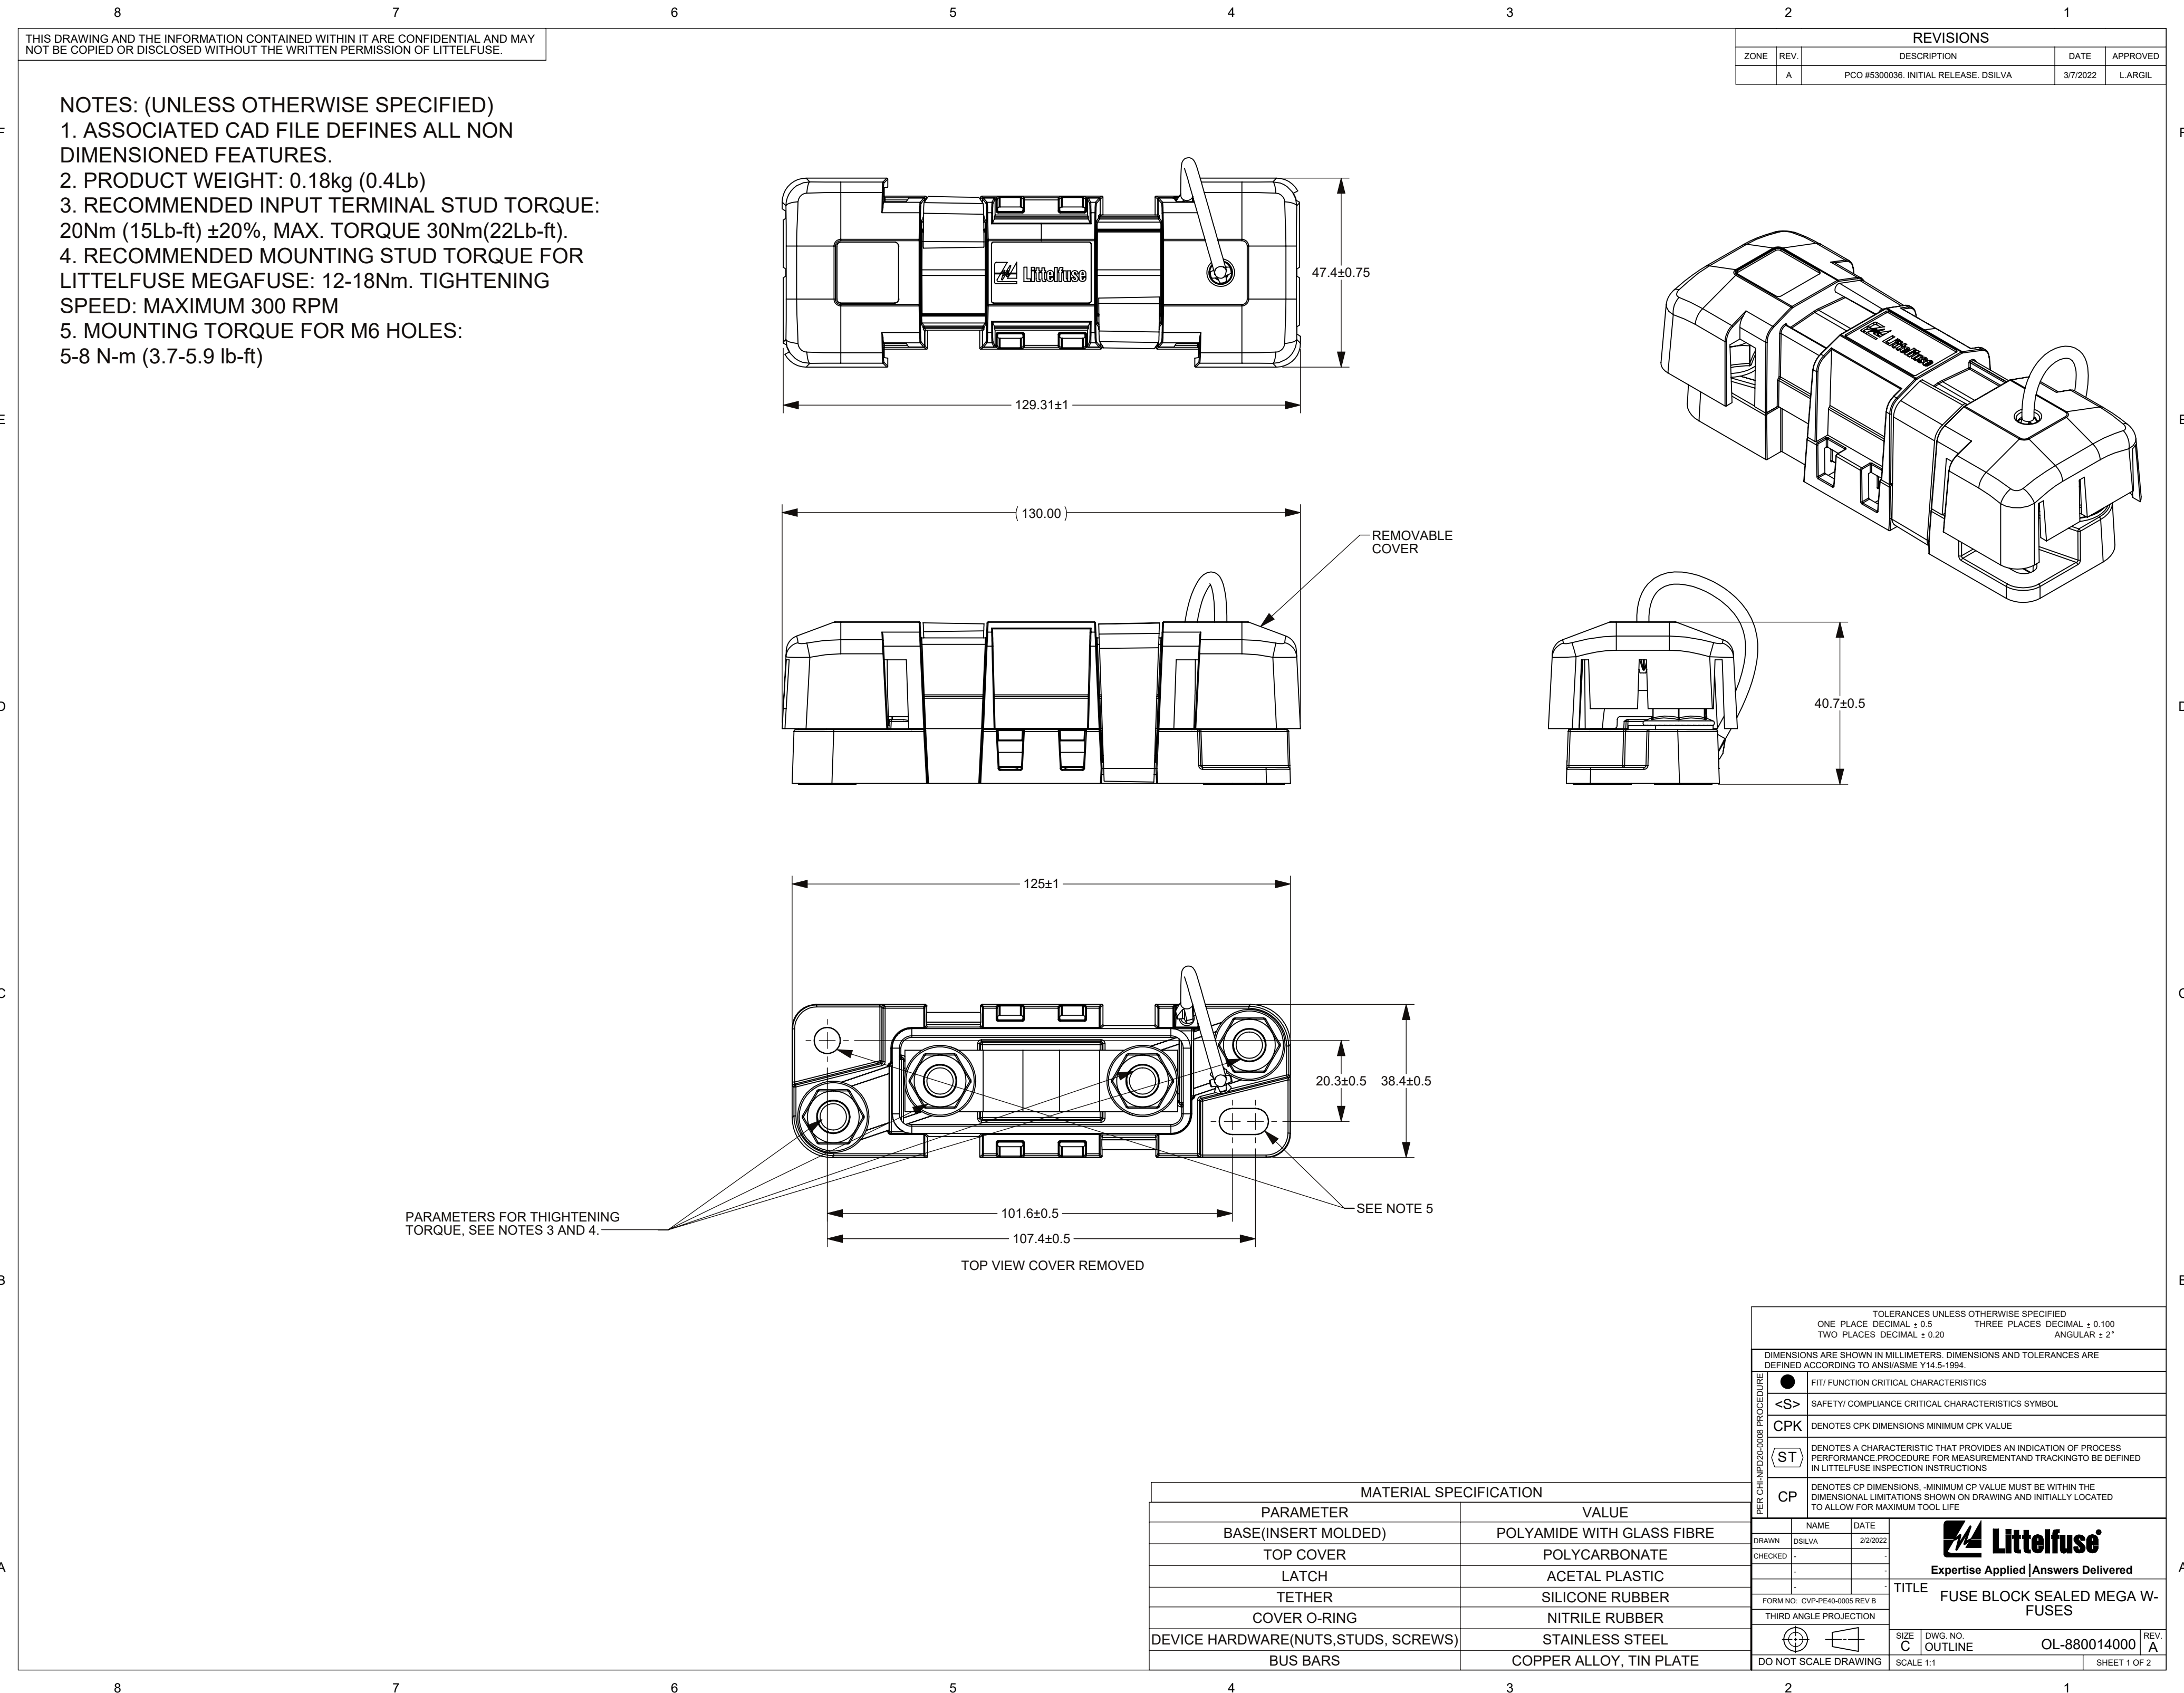

THIS DRAWING AND THE INFORMATION CONTAINED WITHIN IT ARE CONFIDENTIAL AND MAY NOT BE COPIED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF LITTELFUSE.

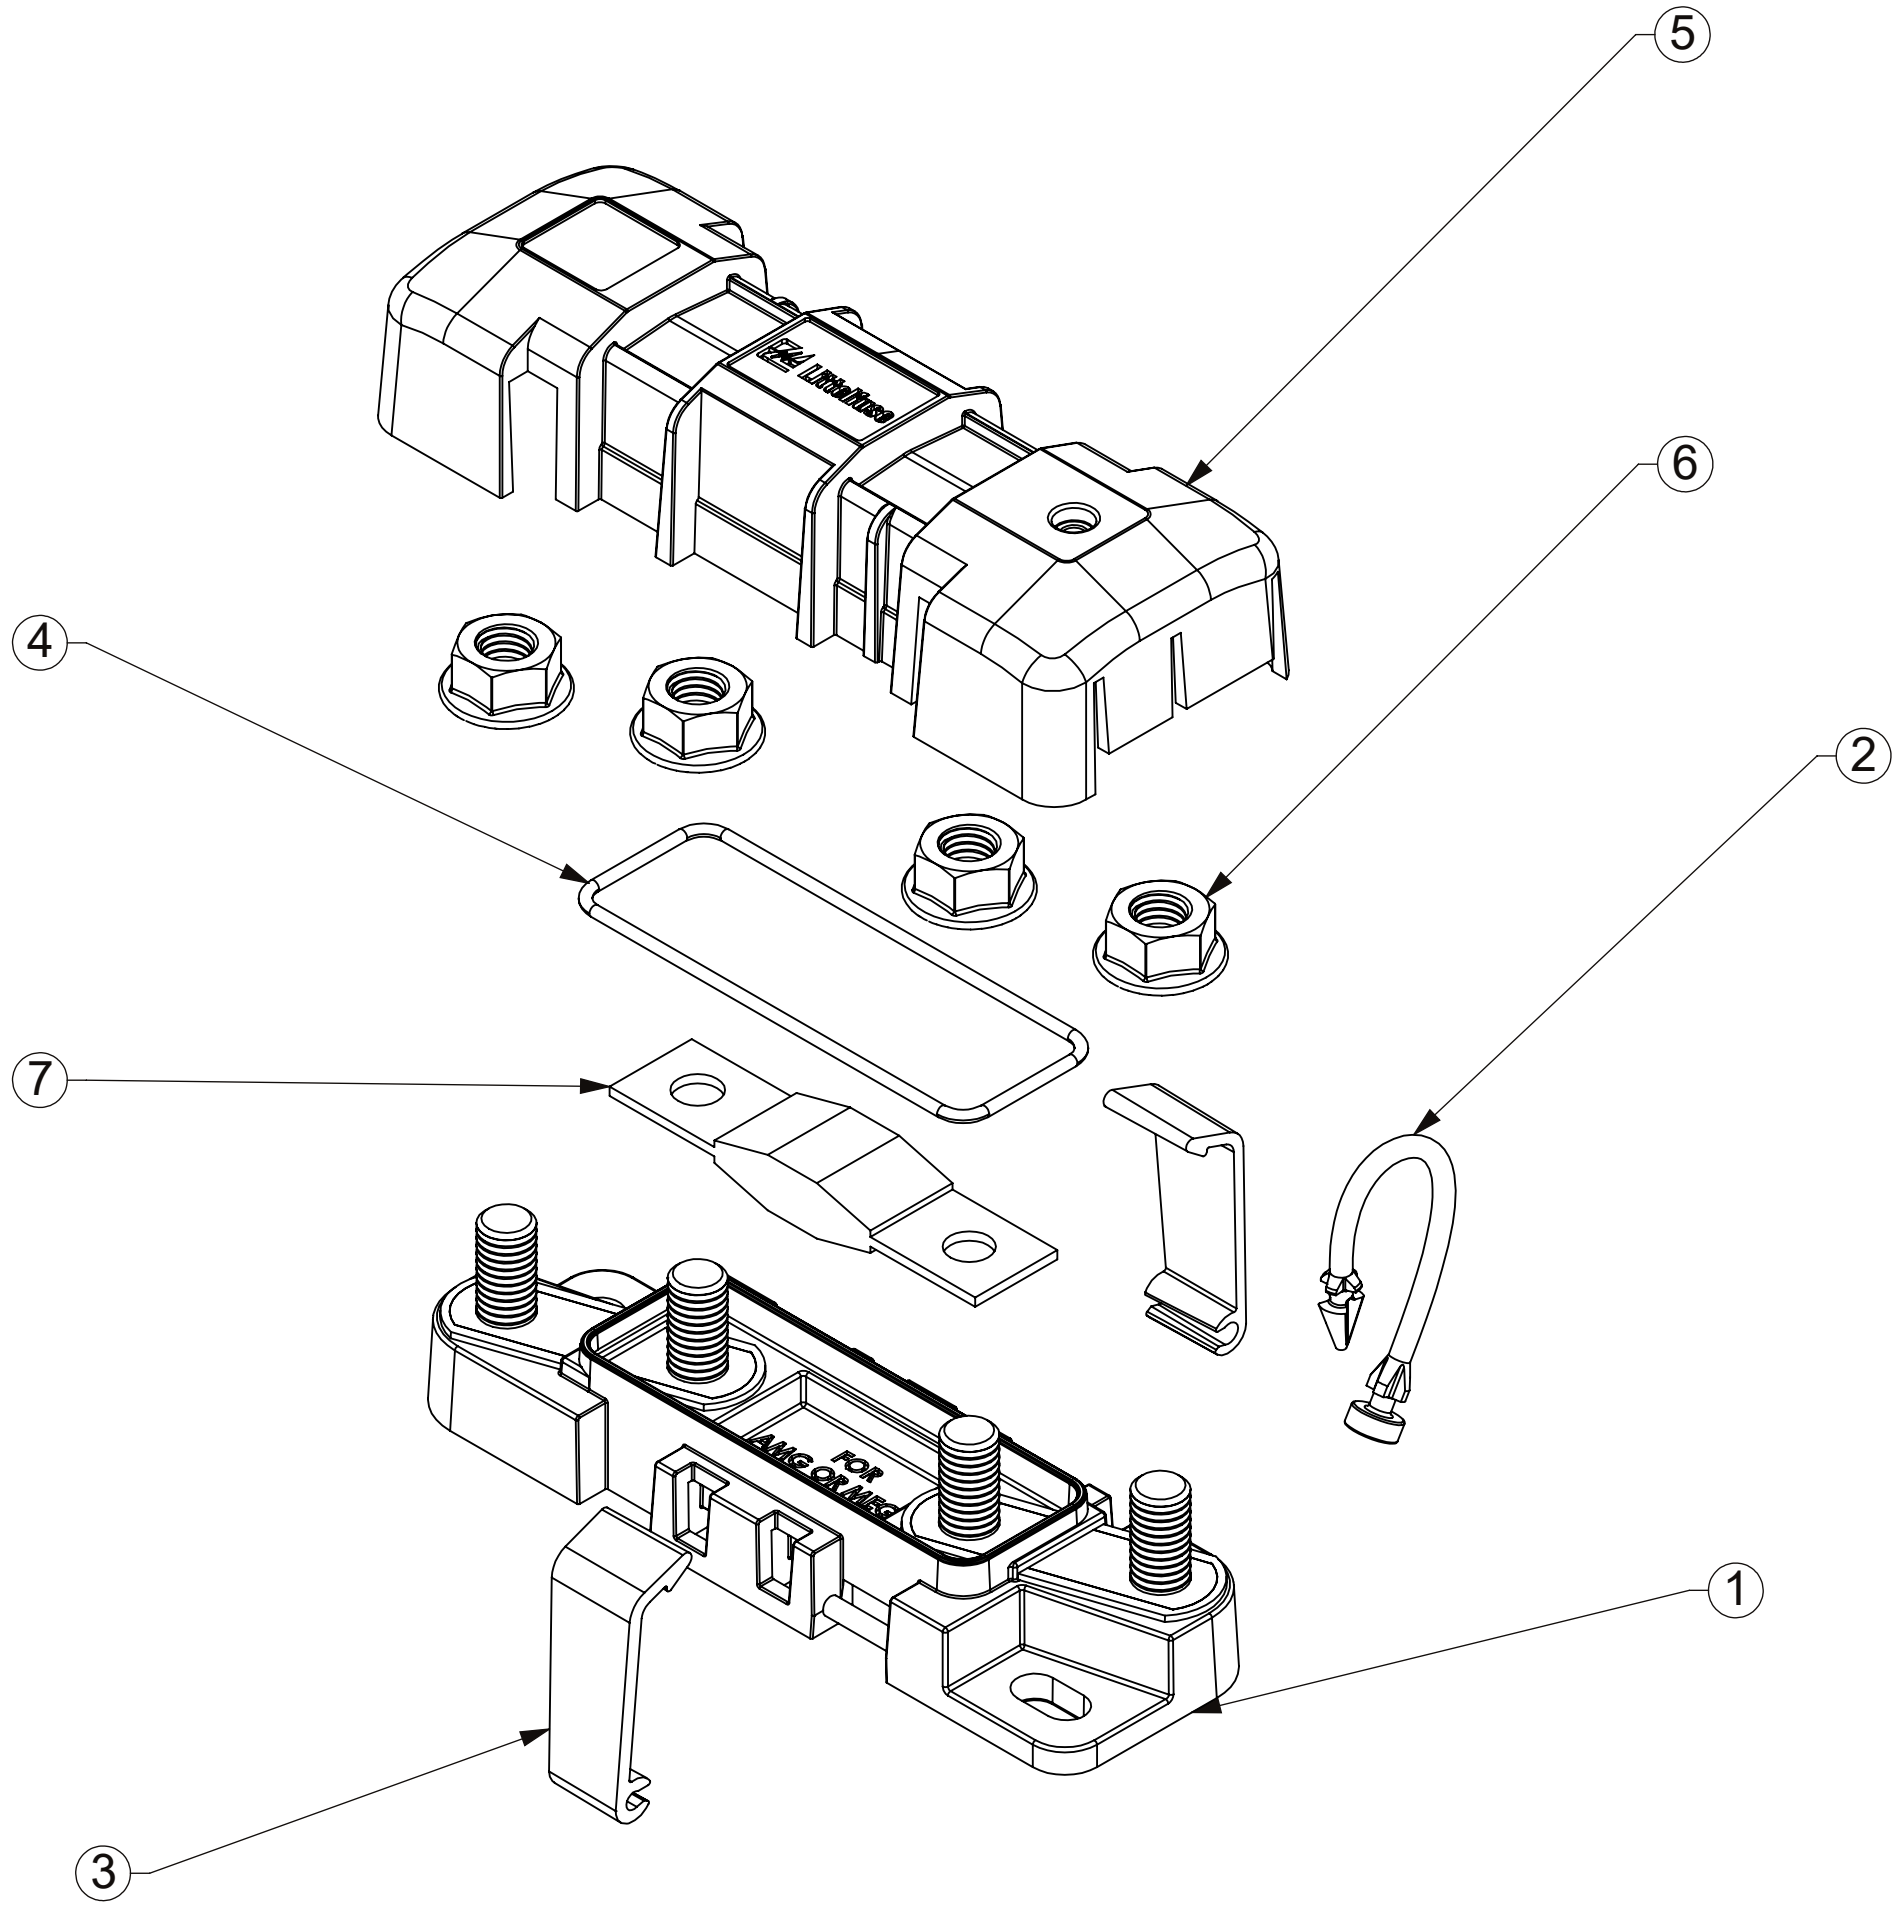

PART NUMBER	FUSE PART NUMBER
880014080	0298080.ZXEH
880014100	0298100.ZXEH
880014125	0298125.ZXEH
880014200	0298200.ZXEH
880014225	0298225.ZXEH
880014250	0298250.ZXEH
880014300	0298300.ZXH
880014350	0298350.ZXH
880014400	0298400.ZXH
880014450	0298450.ZXH
880014500	0298500.ZXH
880014150	0298150.ZXEH

7	SEE CHART	FUSE - MEGA 32V	1	EA
6	-	NUT M8 SERRATED HEX FLANGE SS	4	EA
5	-	COVER SEALED FUSE BLOCK TPS	1	EA
4	-	O-RING 56.8 X 1.5 MM	1	EA
3	-	LATCH PNDB	2	EA
2	-	TETHER PNDB	1	EA
1	-	ASSEMBLY BASE FUSE BLOCK MEGA-AMG	1	EA
NO.	COMPONENT NO.	COMPONENT NAME	QTY	U/M

TOLERANCES UNLESS OTHERWISE SPECIFIED ONE PLACE DECIMAL ± 0.5 TWO PLACES DECIMAL ± 0.20 THREE PLACES DECIMAL ± 0.100 ANGULAR ± 2°		
DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSI/ASME Y14.5-1994.		
PER CHNFPD20-008 PROCEDURE	●	FTI/ FUNCTION CRITICAL CHARACTERISTICS
	<S>	SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL
	CPK	DENOTES CPK DIMENSIONS MINIMUM CPK VALUE
	(ST)	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
	CP	DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE
DRAWN DSILVA 2/2/2022		 Expertise Applied Answers Delivered TITLE FUSE BLOCK SEALED MEGA W-FUSES
CHECKED -		
-		
-		
FORM NO. CVP-PE40-0005 REV B THIRD ANGLE PROJECTION		SIZE C DWG. NO. OUTLINE OL-880014000 REV. A
DO NOT SCALE DRAWING		SCALE 1:1 SHEET 2 OF 2