
| AMPERE | DIM "A" | DIM "B" | |
|--------|------------------------------|------------------------------|--|
| 35 | 0.42 ±0.10 [0.017 ±0.004] | 10.5 ±1.00 [0.413 ±0.039] | |
| 40 | 0.50 ± 0.10 | 10.5 ±1.00 | |
| 40 | [0.020 ±0.004] | [0.413 ±0.039] | |
| 50 | 0.65 ±0.10 | 10.5 ±1.00 | |
| 50 | [0.026 ±0.004] | [0.413 ±0.039] | |
| 60 | 0.80 ± 0.10 | 10.5 ±1.00 | |
| | [0.031 ±0.004] | [0.413 ±0.039] | |
| 80 | 1.10 ±0.10 | 10.5 ±1.00 | |
| | [0.043 ±0.004] | [0.413 ±0.039] | |
| 100 | 0.30 ± 0.10 | 10.5 ±1.00 | |
| 100 | $[0.012 \pm 0.004]$ | [0.413 ±0.039] | |
| 125 | 0.40 ±0.10 | 10.5 ±1.00 | |
| 123 | [0.016 ±0.004] | [0.413 ±0.039] | |
| 130 | 0.45 ±0.10 | 10.5 ±1.00 | |
| 130 | $[0.018 \pm 0.004]$ | [0.413 ±0.039] | |
| 150 | 0.50 ± 0.10 | 10.5 ±1.00 | |
| 150 | [0.020 ±0.004] | [0.413 ±0.039] | |
| 175 | 0.60 ± 0.10 | 10.5 ±1.00 | |
| 1/5 | [0.024 ±0.004] | [0.413 ±0.039] | |
| 200 | 0.70 ±0.10 | 10.5 ±1.00 | |
| 200 | [0.028 ±0.004] | [0.413 ±0.039] | |
| 225 | 0.80 ± 0.10 | 10.5 ±1.00 | |
| 225 | [0.031 ±0.004] | [0.413 ±0.039] | |
| 250 | 1.00 ±0.10 | 10.5 ±1.00 | |
| 250 | [0.039 ±0.004] | [0.413 ±0.039] | |
| 275 | 1.00 ± 0.10 | 11.5 ±1.00 | |
| 275 | [0.039 ±0.004] | [0.453 ±0.039] | |
| 200 | 1.20 ±0.10 | 11.5 ±1.00 | |
| 300 | [0.047 ±0.004] | [0.453 ±0.039] | |
| 225 | 1.30 ±0.10 | 11.5 ±1.00 | |
| 325 | [0.051 ±0.004] | [0.453 ±0.039] | |
| 250 | 1.40 ±0.10 | 11.5 ±1.00 | |
| 350 | [0.055 ±0.004] | [0.453 ±0.039] | |
| 400 | 1.60 ±0.10 | 11.5 ±1.00 | |
| 400 | [0.063 ±0.004] | [0.453 ±0.039] | |
| F00 | 2.00 ±0.10 | 11.5 ±1.00 | |
| 500 | [0.079 ±0.004] | [0.453 ±0.039] | |



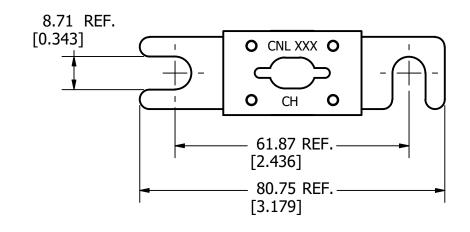

| | REVISION | | | | | | | |
|----|----------|--|--|--|--|--|--|--|
| ٧: | DATE | DESCRIPTION | | | | | | |
| , | 3/22/17 | 517290GCP - RELEASE MRY | | | | | | |
| 3 | 11/14/23 | 527055ECP/D - UPDATE FUSE IMAGE TO REFLECT CURRENT WINDOW DESIGN MRY | | | | | | |
| , | 12/5/23 | 527192ECP/D - REMOVE 600-800A FROM CHART MRY | | | | | | |

| 2 | | | | | | | | | |
|---|---|-----------------------------------|-------------------|---|------------------------------|-----|--|--|--|
| 1 | | | | | | | | | |
| NO | NO COMPONENT NO | | DES | DESCRIPTION | | U/M | | | |
| BILL OF MATERIAL | | | | | | | | | |
| | • | DENOTES CRITICAL CHARACTERISTICS. | | | | | | | |
| (| CPK DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | | | | | | | |
| DENOTES A CHARACTERIST OF PROCESS PERFORMANC AND TRACKING TO BE DEFI LITTELFUSE INSPECTION IF | | | | E. PROCEDURE FOR MEA | | | | | |
| | CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | | | | | | | |
| MATL SPEC | | | | FINISH | | | | | |
| DRW MYORK | | | DATE 3/17/2017 | SCALE NTS | FINISH GOOD WT GRAMS/PIEC | | | | |
| 4 | | | | - · · · - · · · · · · · · · · · · · · · | | | | | |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994

3RD ANGLE PROJECTION

TITLE

CNL SERIES OUTLINE



REVISION DRWG NO.

NO. SHEET 1 OF 1

OL-CNL000