


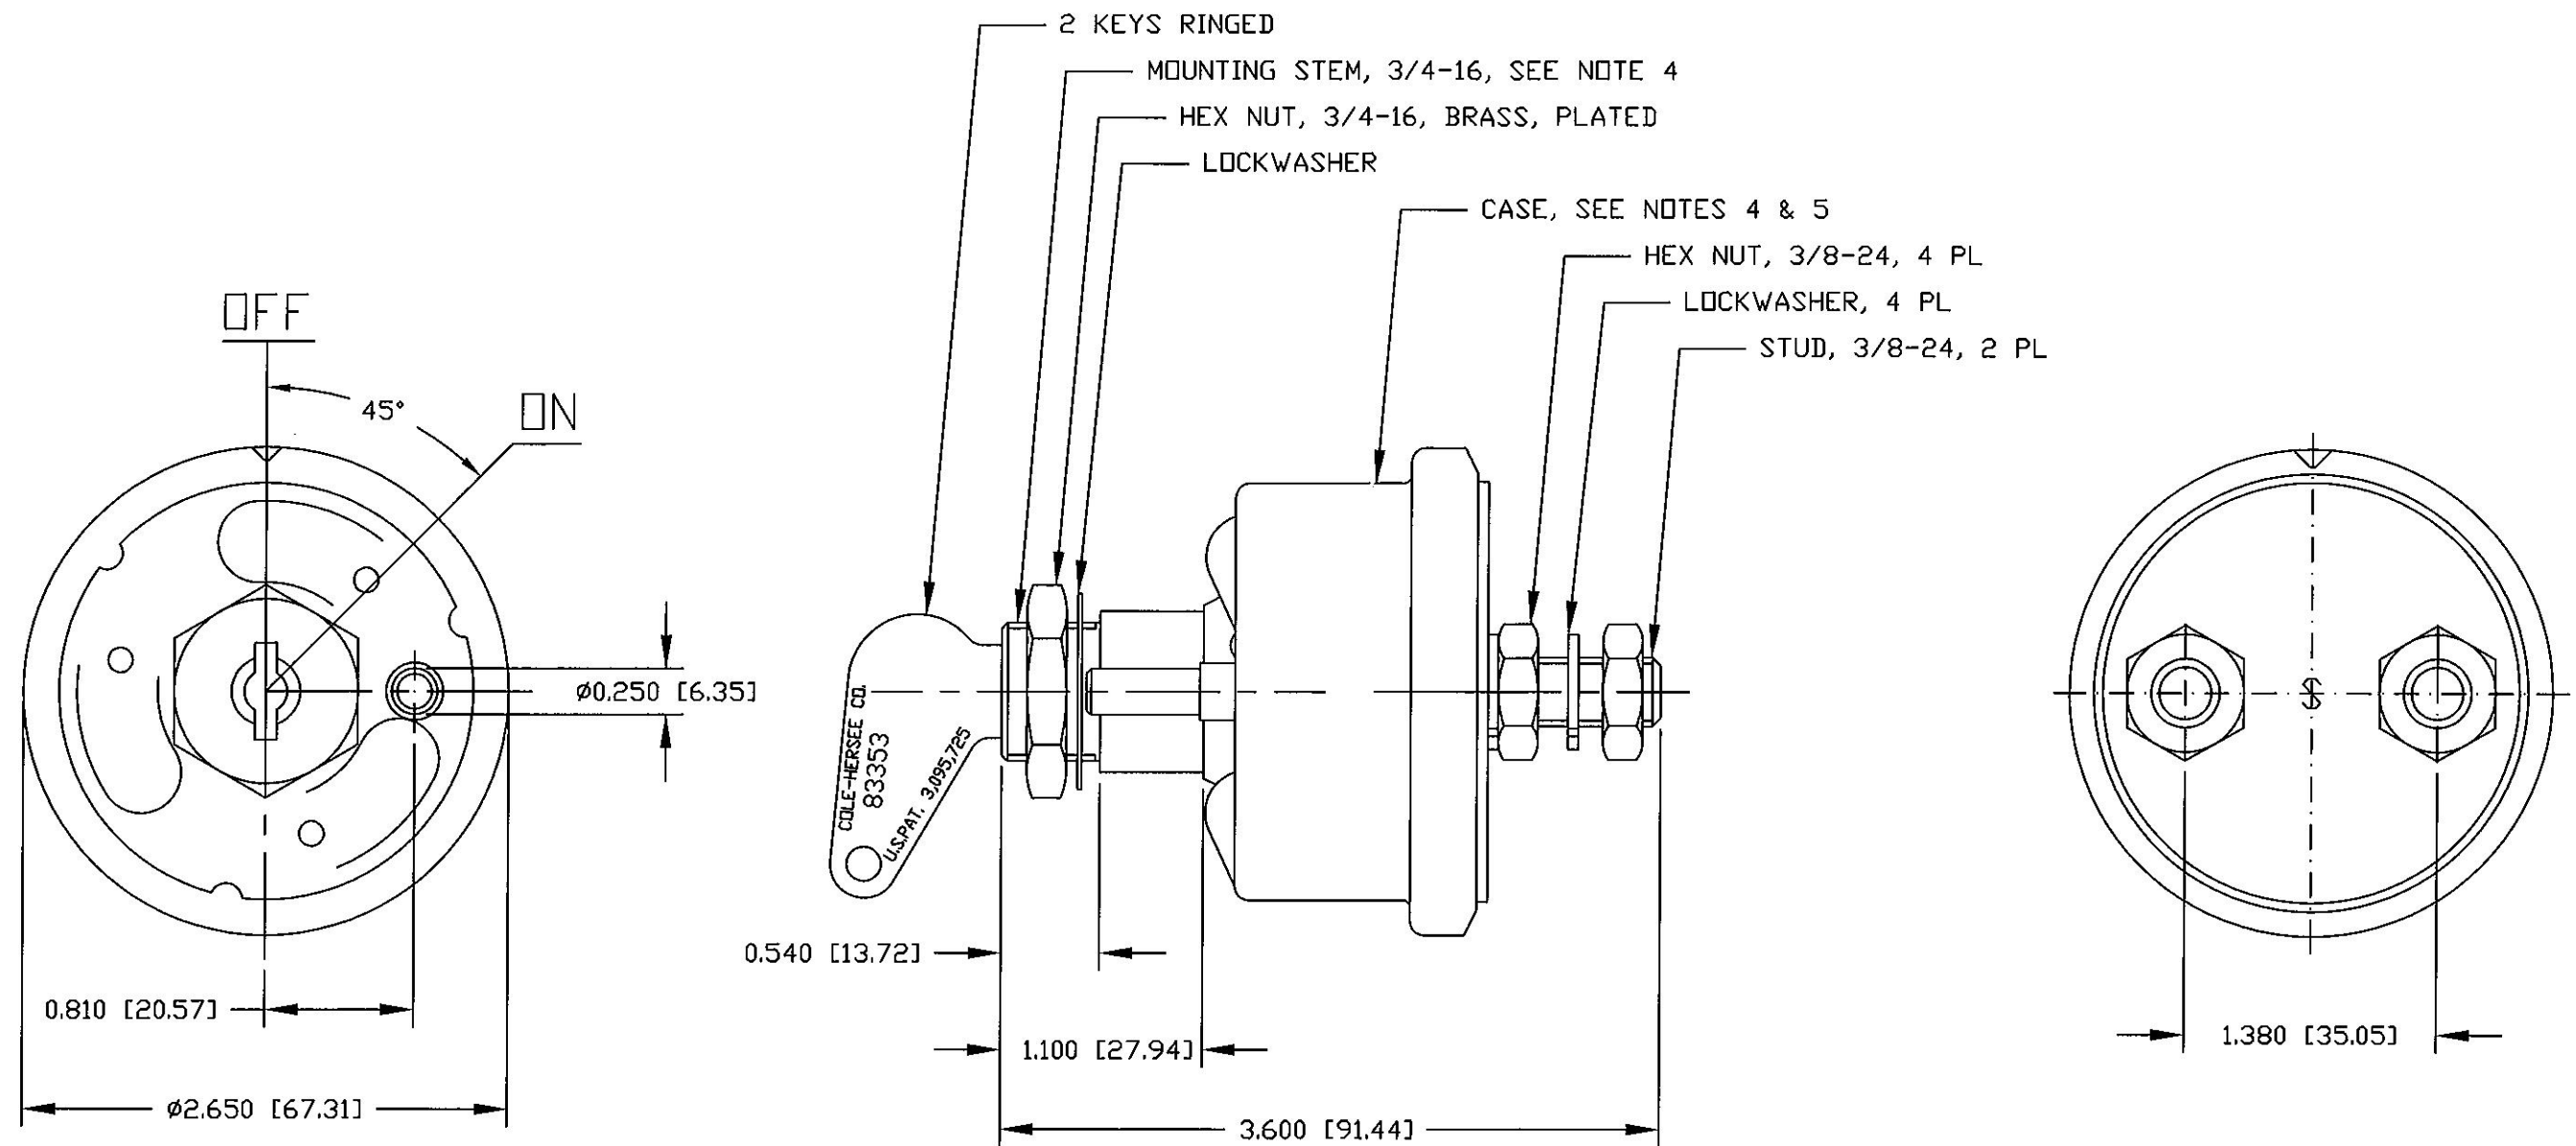

NOTES:

1. ALL STEEL PARTS PLATED
2. ALL DIMENSIONS ARE REFERENCE ONLY
3. SILVER CAD OXIDE CONTACT SURFACES
4. O-RING SEAL BETWEEN MOUNTING STEM & CASE
5. GASKET SEAL BETWEEN TERMINAL INSULATOR & CASE
6. RATING:

SWITCH MUST CARRY 1000 AMPS @ 6, 12, & 24 V DC FOR 1000 CYCLES OF 30 SECONDS ON, 5 MINUTES OFF WITHOUT SIGNIFICANT DETERIORATION OF CONTACTS

Revision Control Record				Rev.	Description of Change	ECN No.	Date	Tolerances Unless otherwise specifically noted, the following are default tolerances: 2-places +/- 0.02" 3-places +/- 0.005" Angular +/- 1° Metric: Shown in [] refers to equivalent English Dim Tol "REF." or an Asterisk (*) = Non-Toleranced Reference Dimension, shown for clarification purposes only. NOTE: All tolerances are Non-Cumulative.			PROPRIETARY INFORMATION This Engineering Drawing, and the information contained herein, is proprietary to Cole Hersee Company and may not be disclosed, re-produced, or in any other way transferred or communicated to any other party without the express written consent of an authorized representative of Cole Hersee Company.			Special Characteristics: CC Critical Characteristic, relating to Safety and/or Regulatory Compliance X Significant Characteristic relating to Process Control KC Control Dimension relating to Form - Fit - Function as defined by Cole Hersee Company and/or the Customer			Cole Hersee Co. 20 Old Colony Ave., South Boston, MA, 02127 Phn: 617-268-2100 Web: www.colehersee.com		Description: SWITCH, MASTER DISCONNECT		Drawing / Part No.: 2484-19		Current Rev. H
Rev.	Description of Change	ECN No.	Date																				
H	REDRAWN; BOM CHANGE	10150	4/29/10																				
								FORM CHT-6 (2/07)			Used On or Ref.: 2484-A WITH WELDED CASE & KEY			Scale: 1:1		Drawn BY: RMT		Date Drawn: 12/12/79		Pg. 1 of 1			