CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

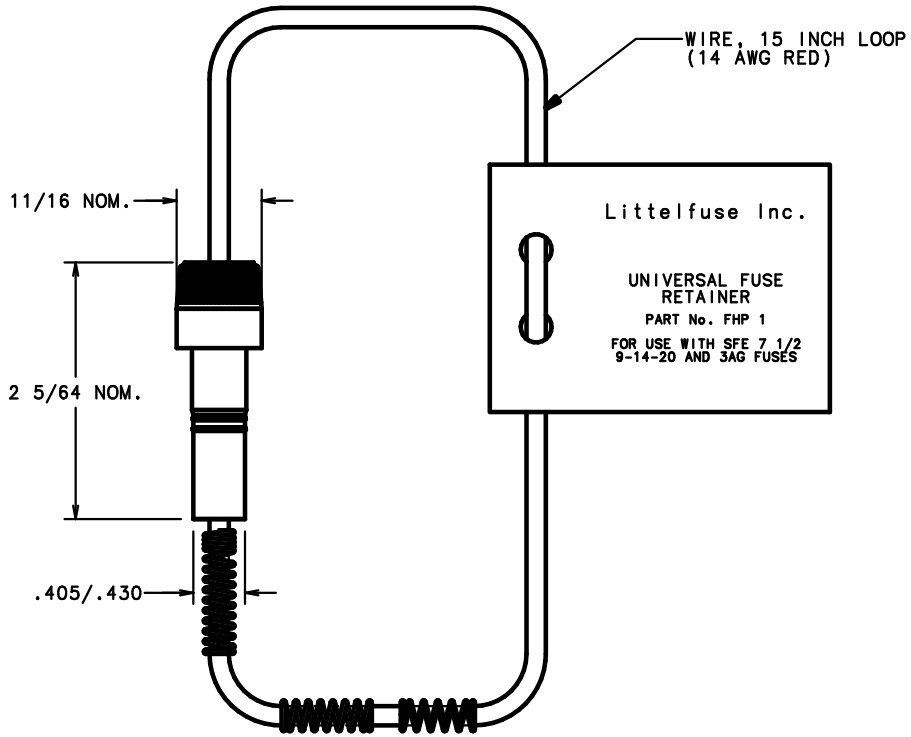

NOTES:
1. THIS RETAINER IS SUPPLIED WITH THREE (3) SPRINGS, MAKING IT SUITABLE FOR 9, 14 + 20 AMP "SFE" FUSES BY SELECTING THE PROPER SPRING.
2. FOR PANEL MOUNTING OF THIS RETAINER, ORDER SPRING CLIP -900-028.
3. SPRINGS MAY BE SHIPPED ASSEMBLED EITHER INSIDE OR OUTSIDE OF FUSEHOLDER BODY.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.
DENOTES CRITICAL CHARACTERISTICS.
DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE 1.0
DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
NOTES CP DIMENSIONS,-MINIMUM CP VALUE TO BE WITHIN THE DIMENSIONAL LIMITATIONS ON DRAWING AND INITIALLY LOCATED TO FOR MAXIMUM TOOL LIFE.

UNCONTROLLED DOCUMENT

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL

MATL SPEC | FINISH

COPIES TO
1 9 18
2 10 19
3 12 20
4 13 21
5 14 23
6 15 33
7 16 43
8 17 53

	DRW	DATE	SCALE
	JMB	1/12/98	1=1
CHK		DATE	SUPER DRW
APPD		DATE	RAW STK WT LBS/M

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.01 FRACTION ±
THREE PLACE DEC ±.005 ANGULAR ±1°

TITLE: IN-LINE BAYONET KNOB FUSEHOLDER

Littelfuse®
DES PLAINES, ILLINOIS 60016

REVISION: C
DWG. NO. OUTLINE
0FHP0001Z

LTR	REVISION	CHK	APD
C	38958C- REVISED & REDRAWN ON NEW FORMAT JMB		