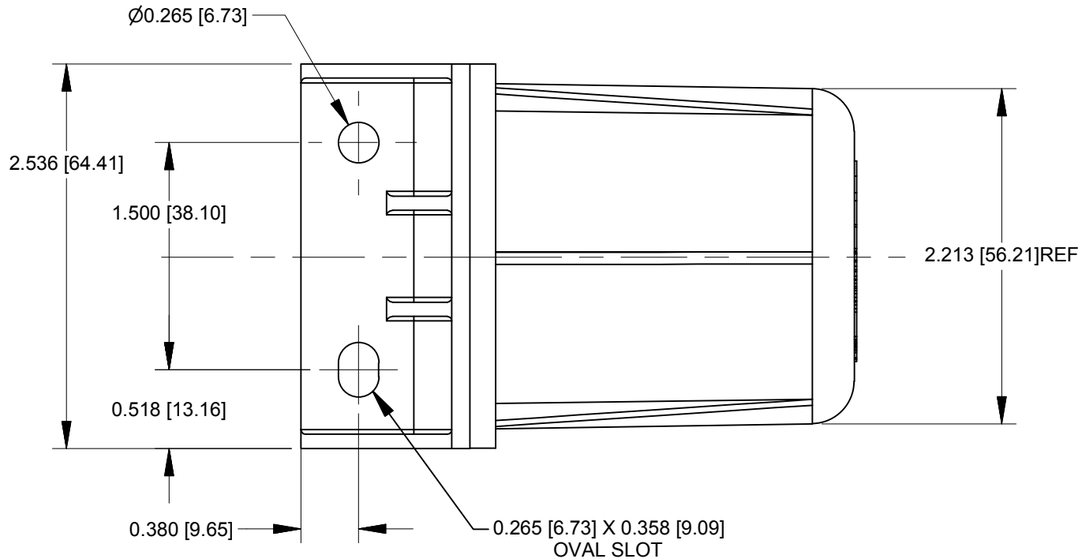

NOTES:
1. ALL DIMENSION ARE REFFRENCE ONLY UNLESS NOTED OTHERWISE
2. SPRING FORCE 10 LBS [44.4 N] MIN AT FULL CUP TRAVEL
3. ALL PLASTIC PARTS ALUMINUM, PANTONE 422U IN COLOR
4. MATERIAL: PA66 GF30 A3EG6
5.PARTS 98460 PLUNGER; 87174 BRACKET & 81474 HOUSING TO MATCH IN COLOR AND FINISH

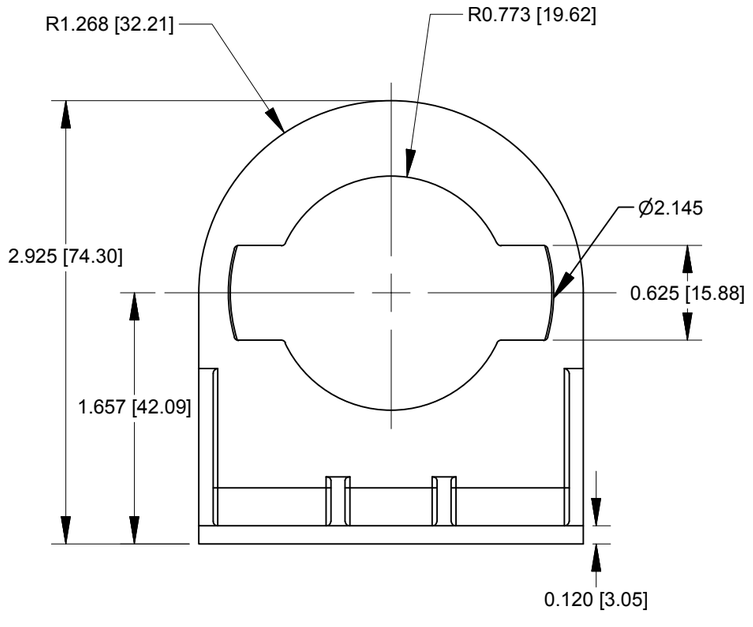

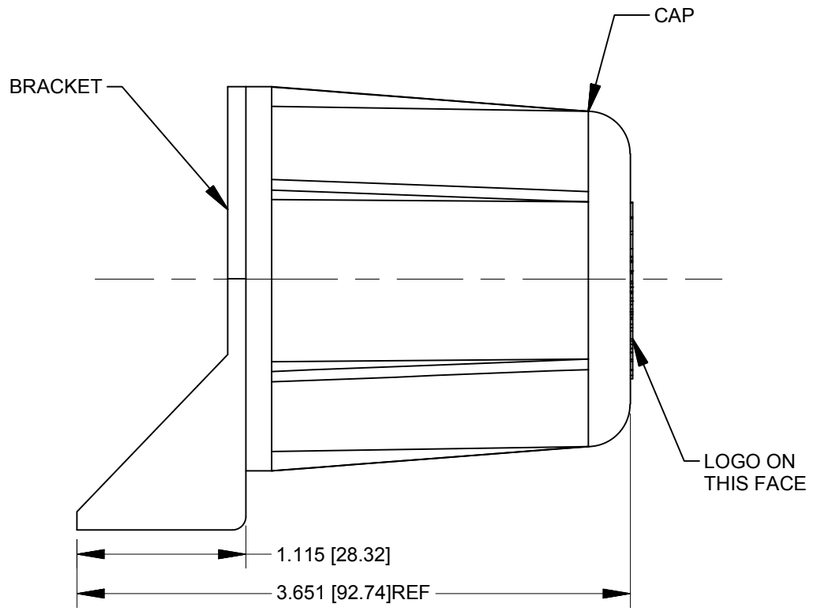

Revision Control Record				Rev.	Description of Change	ECN No.	Date
Rev.	Description of Change	ECO No.	Date				
G	REVISED SPRIN, ADDED NOTES	09071	1/27/09				
H	BOM CHANGE	11033	3/1/11				
J	REDESIGN 11750	10093	02/13/14				
K	ADD NOTE	11202	10/30/14				

Note: unless noted otherwise all dimension are AFTER plating

Tolerances Unless otherwise specifically noted, the following are default tolerances;

2-places	3-places	Angular
+/- 0.02"[0.50]	+/- 0.005"[0.13]	+/- 1˚

Unless otherwise specified dimensions are in inches
Dimensions in brackets [ ] are in millimeters
"REF" = Non-Toleranced Reference Dimension, shown for clarification purposes only.
NOTE: All tolerances are Non-Cumulative.

PROPRIETARY INFORMATION
All information contained herein, is proprietary to the Cole Hersee Company. Unauthorized use or reproduction is prohibited.

3RD ANGLE PROJECTION

Special Characteristics:
- CC: Critical Characteristic, relating to Safety and/or Regulatory Compliance
- X: Significant Characteristic relating to Process Control
- KC: Control Dimension relating to Form - Fit - Function as defined by Cole Hersee Company and/or the Customer

Littelfuse®
Phn: 617-268-2100 Web: www.colehersee.com

Description: **STOR-A-WAY 7 POLE**

FORM CHT-6 (1/12)	Used On or Ref.: ABUCPROTO29083	Scale: 1:1	Drawn By: CM	Date Drawn: 01/29/2014	Pg.1 of 1

Drawing / Part No.: **11750**

Current Rev.: **K**