

| Parameter                        | Rating | Units  |
|----------------------------------|--------|--|
| Relay Blocking Voltage           | 350    | V  |
| Relay Load Current               | 120    | $\text{mA}_{\text{rms}} / \text{mA}_{\text{DC}}$ |
| Relay On-Resistance (max)        | 20     | $\Omega$   |
| Bridge Rectifier Reverse Voltage | 100    | V  |
| Darlington Collector Current     | 120    | mA   |
| Darlington Current Gain          | 10,000 | -  |

**Features**

- Current Limiting
- 3750V<sub>rms</sub> Input/Output Isolation
- 2mW Hook Switch Drive Power (Logic Compatible)
- Full-Wave Bridge Rectifier
- Darlington Transistor for Electronic Inductor “Dry” Circuits
- Full-Wave Current Detector for Ring Signal or Loop Current Detect
- JEDEC Standard Lead Configuration
- Board Space and Cost Savings
- Small 16-Pin SOIC Package (PCMCIA Compatible)

**Applications**

- Data/Fax Modem
- Voice Mail Systems
- Telephone Sets
- Computer Telephony Integration
- Set Top Box Modems

**Description**

The Integrated Telecom Circuit combines a single-pole, normally open (1-Form-A) solid state relay, a bridge rectifier, a Darlington transistor, and an optocoupler into one 16-pin SOIC package, consolidating designs and reducing component count in telecom applications. The ITC117PL's relay features the added benefit of current limiting, and the optocoupler provides for full-wave detection of ring signals.


**Approvals**

- UL Recognized Component: File E76270
- CSA Certified Component: Certificate 1305490
- TUV EN 62368-1: Certificate B 082667 0008


**Ordering Information**

| Part #     | Description             |
|------------|-------------------------|
| ITC117PL   | 16-Pin SOIC (50/Tube)   |
| ITC117PLTR | 16-Pin SOIC (1000/Reel) |

**Pin Configuration**

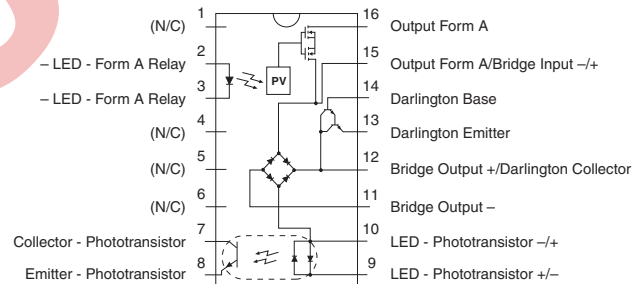

**Switching Characteristics of Normally Open Devices**

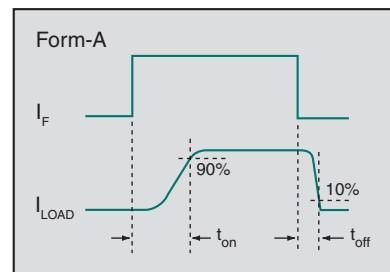

**Absolute Maximum Ratings @ 25°C**

| Parameter                              | Ratings     | Units            |
|--|-------------|------------------|
| Input Control Current, Relay           | 50          | mA               |
| Input Control Current, Detector        | 100         | mA               |
| Total Package Dissipation <sup>1</sup> | 1           | W                |
| Isolation Voltage, Input to Output     | 3750        | V <sub>rms</sub> |
| Operational Temperature                | -40 to +85  | °C               |
| Storage Temperature                    | -40 to +125 | °C               |

<sup>1</sup> Derate linearly 8.33 mW / °C

Total Power Dissipation (PD):

$$P_D = P_{\text{HOOKSWITCH}} + P_{\text{BRIDGE}} + P_{\text{DARLINGTON}} + P_{\text{LED}}$$

$$P_D = (R_{DS(on)})(I_L^2) + 2(V_F)(I_L) + (V_{CE})(I_L) + (V_{LED})(I_F)$$

WHERE:

R<sub>DS(on)</sub> = Maximum relay on-resistance

I<sub>L</sub> = Maximum loop current

V<sub>F</sub> = Maximum diode forward voltage

V<sub>CE</sub> = Maximum voltage collector to emitter

V<sub>LED</sub> = Maximum LED forward voltage

I<sub>F</sub> = Maximum LED current

*Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at conditions beyond those indicated in the operational sections of this data sheet is not implied.*

*Typical values are characteristic of the device at +25°C, and are the result of engineering evaluations. They are provided for information purposes only, and are not part of the manufacturing testing requirements.*

**Electrical Characteristics @25°C: Relay Section**

| Parameter                         | Conditions   | Symbol            | Min | Typ | Max | Units                                |
|-----------------------------------|--|-------------------|-----|-----|-----|--------------------------------------|
| <b>Output Characteristics</b>     |  |                   |     |     |     |                                      |
| Blocking Voltage (Peak)           | -  | V <sub>L</sub>    | -   | -   | 350 | V <sub>P</sub>                       |
| Load Current, Continuous          | -  | I <sub>L</sub>    | -   | -   | 120 | mA <sub>rms</sub> / mA <sub>DC</sub> |
| On-Resistance                     | I <sub>L</sub> =120mA                                    | R <sub>ON</sub>   | -   | -   | 20  | Ω                                    |
| Off-State Leakage Current         | V <sub>L</sub> =350V <sub>P</sub> , T <sub>J</sub> =25°C | I <sub>LEAK</sub> | -   | -   | 1   | μA                                   |
| <b>Switching Speeds</b>           |  |                   |     |     |     |                                      |
| Turn-On                           | I <sub>F</sub> =5mA, V <sub>L</sub> =10V                 | t <sub>on</sub>   | -   | -   | 5   | ms                                   |
| Turn-Off                          | I <sub>F</sub> =5mA, V <sub>L</sub> =10V                 | t <sub>off</sub>  | -   | -   | 3   | ms                                   |
| Output Capacitance                | V <sub>L</sub> =50V, f=1MHz                              | C <sub>OUT</sub>  | -   | 25  | -   | pF                                   |
| Current Limit                     | I <sub>F</sub> =5mA                                      | I <sub>CL</sub>   | 190 | 235 | 280 | mA                                   |
| <b>Input Characteristics</b>      |  |                   |     |     |     |                                      |
| Input Control Current to Activate | I <sub>L</sub> =120mA                                    | I <sub>F</sub>    | -   | -   | 5   | mA                                   |
| Input Voltage Drop                | I <sub>F</sub> =5mA                                      | V <sub>F</sub>    | 0.9 | 1.2 | 1.4 | V                                    |
| Reverse Input Voltage             | -  | V <sub>R</sub>    | -   | -   | 5   | V                                    |
| Reverse Input Current             | V <sub>R</sub> =5V                                       | I <sub>R</sub>    | -   | -   | 10  | μA                                   |

**Electrical Characteristics @25°C: Detector Section**

| Parameter                            | Conditions              | Symbol     | Min | Typ | Max | Units   |
|--------------------------------------|-------------------------|------------|-----|-----|-----|---------|
| <b>Output Characteristics</b>        |                         |            |     |     |     |         |
| Phototransistor Blocking Voltage     | $I_C=10\mu A$           | $BV_{CEO}$ | 20  | 50  | -   | V       |
| Phototransistor Dark Current         | $V_{CE}=5V, I_F=0mA$    | $I_{CEO}$  | -   | 50  | 500 | nA      |
| Saturation Voltage                   | $I_C=2mA, I_F=16mA$     | $V_{SAT}$  | -   | 0.3 | 0.5 | V       |
| Current Transfer Ratio               | $I_F=6mA, V_{CE}=0.5V$  | CTR        | 33  | 400 | -   | %       |
| <b>Input Characteristics</b>         |                         |            |     |     |     |         |
| Input Control Current                | $I_C=2mA, V_{CE}=0.5V$  | $I_F$      | -   | 2   | 6   | mA      |
| Input Voltage Drop                   | $I_F=5mA$               | $V_F$      | 0.9 | 1.2 | 1.4 | V       |
| Input Current (Detector Must be Off) | $I_C=1\mu A, V_{CE}=5V$ | $I_F$      | 5   | 25  | -   | $\mu A$ |




**Electrical Characteristics @25°C (Unless Otherwise Noted): Bridge Rectifier Section**

| Parameter               | Conditions                 | Symbol   | Min | Typ | Max | Units   |
|-------------------------|----------------------------|----------|-----|-----|-----|---------|
| Reverse Voltage         | -                          | $V_{RD}$ | -   | -   | 100 | V       |
| Forward Voltage Drop    | $I_{FD}=120mA$             | $V_{FD}$ | -   | -   | 1.5 | V       |
| Reverse Leakage Current | $T_J=25^\circ C, V_R=100V$ | $I_{RD}$ | -   | -   | 10  | $\mu A$ |
|                         | $T_J=85^\circ C$           |          | -   | 50  | -   |         |
| Forward Current         | -                          | $I_{FD}$ | -   | -   | 140 | mA      |
| Continuous              | -                          |          | -   | -   | 500 |         |
| Peak                    | $t=10ms$                   |          | -   | -   | 500 |         |







**Electrical Characteristics @25°C: Darlington Transistor Section**

| Parameter                                   | Conditions                     | Symbol        | Min    | Typ | Max | Units   |
|---|--------------------------------|---------------|--------|-----|-----|---------|
| Collector-Emitter Voltage                   | $I_C=10mA_{DC}, I_B=0mA$       | $V_{CEO}$     | 40     | -   | -   | V       |
| Collector Current, Continuous               | $V_C=3.5V$                     | $I_C$         | -      | -   | 120 | mA      |
| Power Dissipation                           | -                              | $P_D$         | -      | -   | 500 | mW      |
| Off-State Collector-Emitter Leakage Current | $V_{CE}=10V, I_B=0mA$          | $I_{CEX}$     | -      | -   | 1   | $\mu A$ |
| DC Current Gain                             | $V_{CE}=10V_{DC}, I_C=120mA$   | $h_{FE}$      | 10,000 | -   | -   | -       |
| Saturation Voltage                          | $I_C=120mA$                    | $V_{CE(sat)}$ | -      | -   | 1.5 | V       |
| Total Harmonic Distortion                   | $I_C=40mA, f_O=300Hz @ -10dBm$ | -             | -      | -   | -80 | dB      |

**DEVICE PERFORMANCE DATA\***










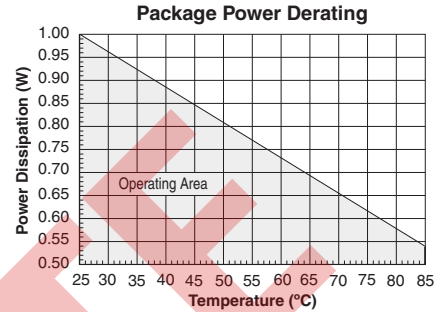
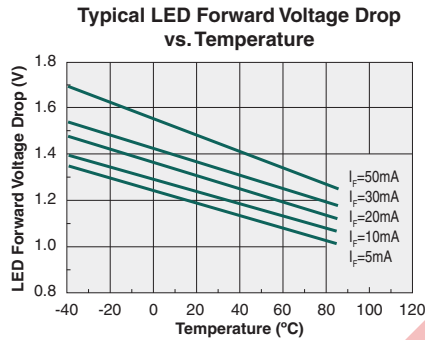
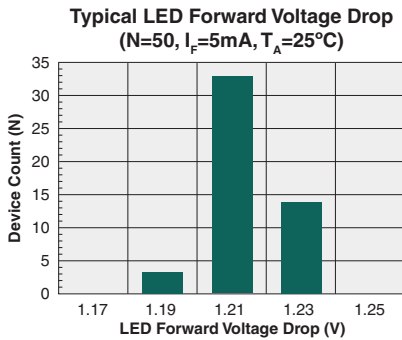


**RELAY PERFORMANCE DATA\***

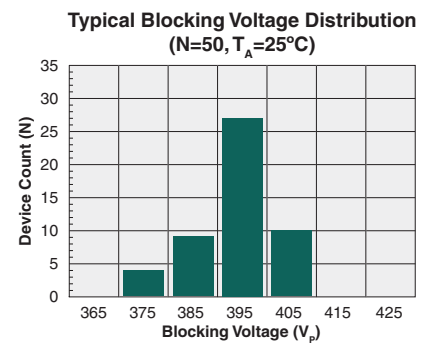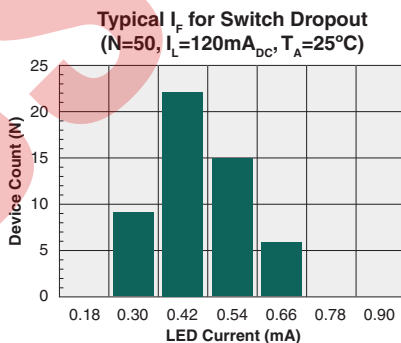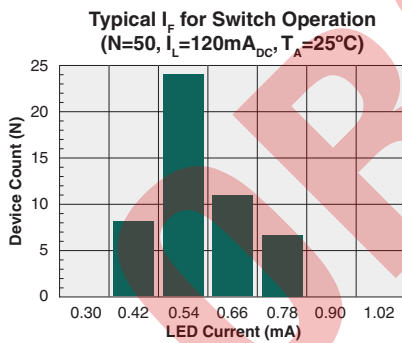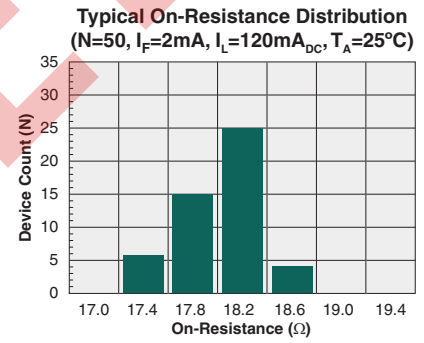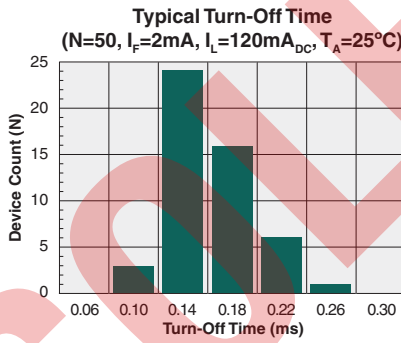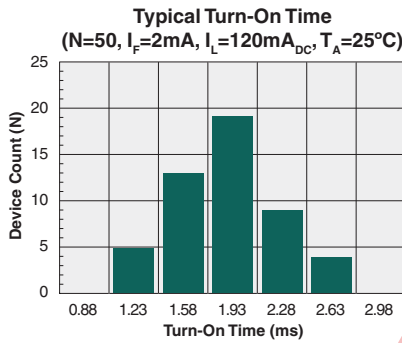





\* Unless otherwise noted, data presented in these graphs is typical of device operation at 25°C.

RELAY PERFORMANCE DATA (cont)\*

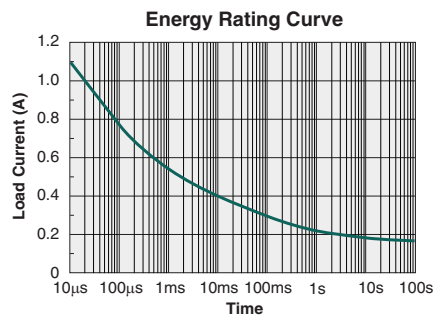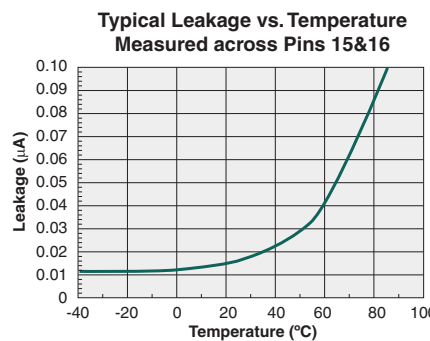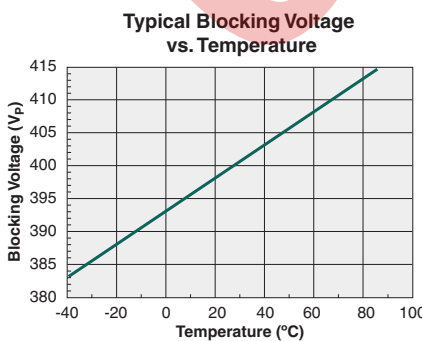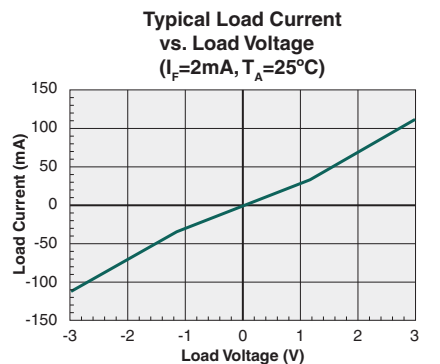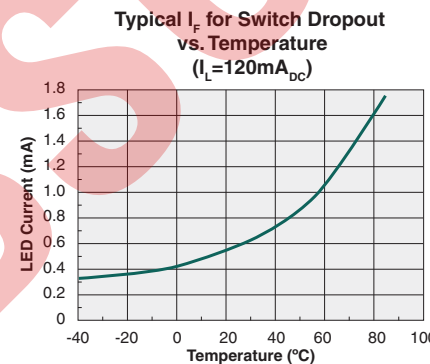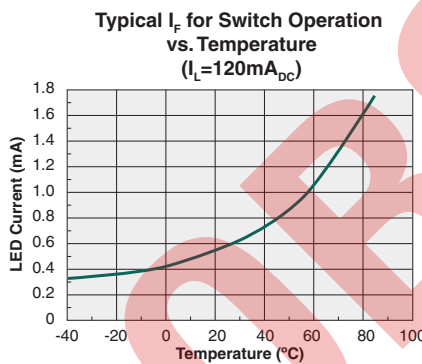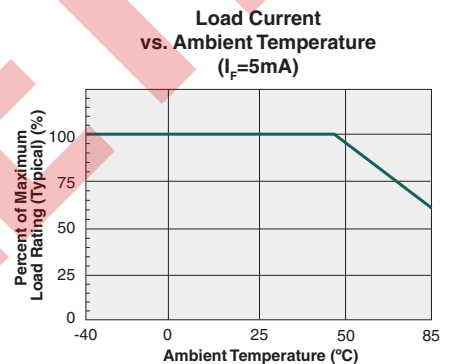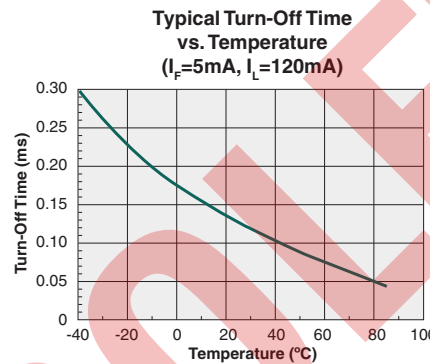
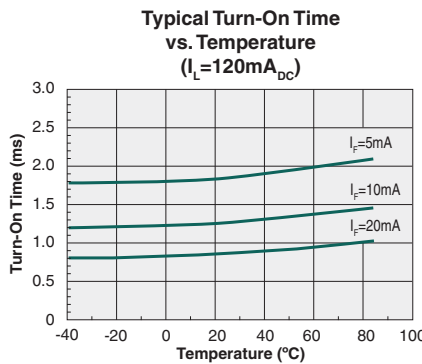
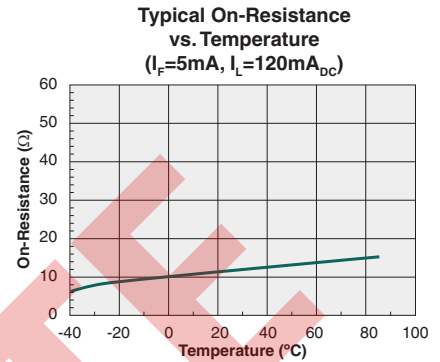
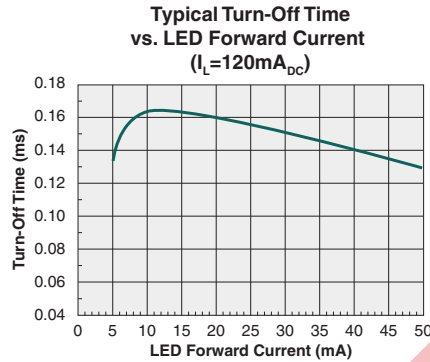
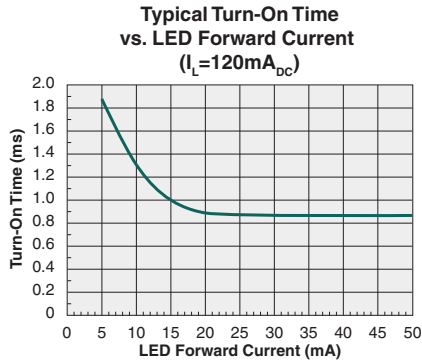


\* Unless otherwise noted, data presented in these graphs is typical of device operation at 25°C.

**PHOTOTRANSISTOR PERFORMANCE DATA\***

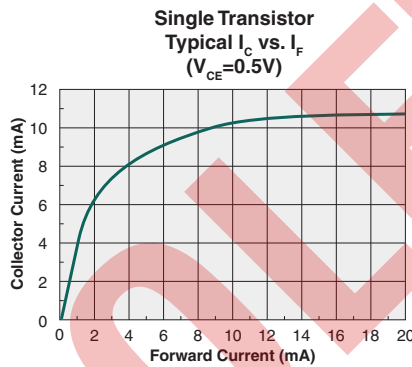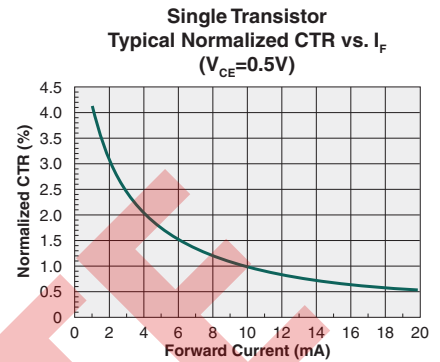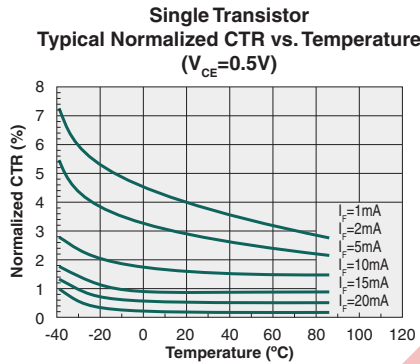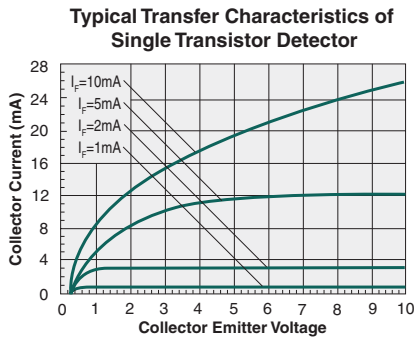

**DARLINGTON PERFORMANCE DATA\***

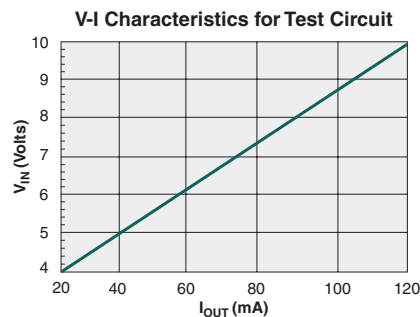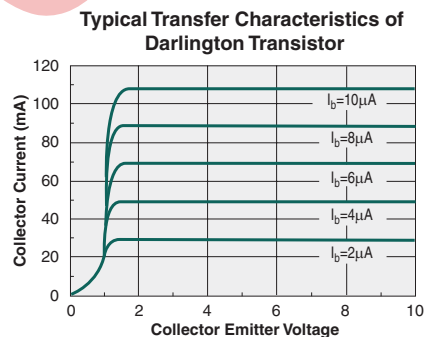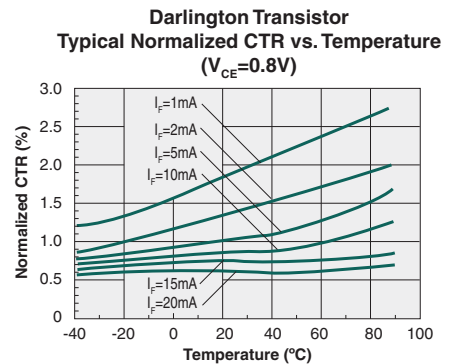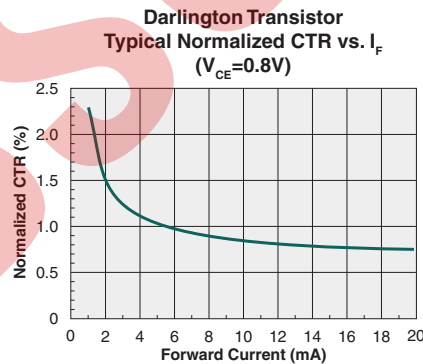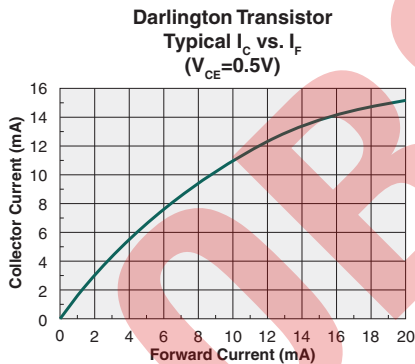

\* Unless otherwise noted, data presented in these graphs is typical of device operation at 25°C.

**Manufacturing Information**

**Moisture Sensitivity**



All plastic encapsulated semiconductor packages are susceptible to moisture ingress. IXYS Integrated Circuits classifies its plastic encapsulated devices for moisture sensitivity according to the latest version of the joint industry standard, **IPC/JEDEC J-STD-020**, in force at the time of product evaluation. We test all of our products to the maximum conditions set forth in the standard, and guarantee proper operation of our devices when handled according to the limitations and information in that standard as well as to any limitations set forth in the information or standards referenced below.

Failure to adhere to the warnings or limitations as established by the listed specifications could result in reduced product performance, reduction of operable life, and/or reduction of overall reliability.

This product carries a **Moisture Sensitivity Level (MSL)** classification as shown below, and should be handled according to the requirements of the latest version of the joint industry standard **IPC/JEDEC J-STD-033**.

| Device   | Moisture Sensitivity Level (MSL) Classification |
|----------|---|
| ITC117PL | MSL 3   |

**ESD Sensitivity**



This product is ESD Sensitive, and should be handled according to the industry standard **JESD-625**.

**Soldering Profile**

Provided in the table below is the **IPC/JEDEC J-STD-020** Classification Temperature ( $T_C$ ) and the maximum dwell time the body temperature of these surface mount devices may be ( $T_C - 5$ )°C or greater. The Classification Temperature sets the Maximum Body Temperature allowed for these devices during reflow soldering processes.

| Device   | Classification Temperature ( $T_C$ ) | Dwell Time ( $t_p$ ) | Max Reflow Cycles |
|----------|--------------------------------------|----------------------|-------------------|
| ITC117PL | 245°C                                | 30 seconds           | 3                 |


**Board Wash**

IXYS Integrated Circuits recommends the use of no-clean flux formulations. Board washing to reduce or remove flux residue following the solder reflow process is acceptable provided proper precautions are taken to prevent damage to the device. These precautions include but are not limited to: using a low pressure wash and providing a follow up bake cycle sufficient to remove any moisture trapped within the device due to the washing process. Due to the variability of the wash parameters used to clean the board, determination of the bake temperature and duration necessary to remove the moisture trapped within the package is the responsibility of the user (assembler). Cleaning or drying methods that employ ultrasonic energy may damage the device and should not be used. Additionally, the device must not be exposed to halide flux or solvents.




MECHANICAL DIMENSIONS

ITC117PL

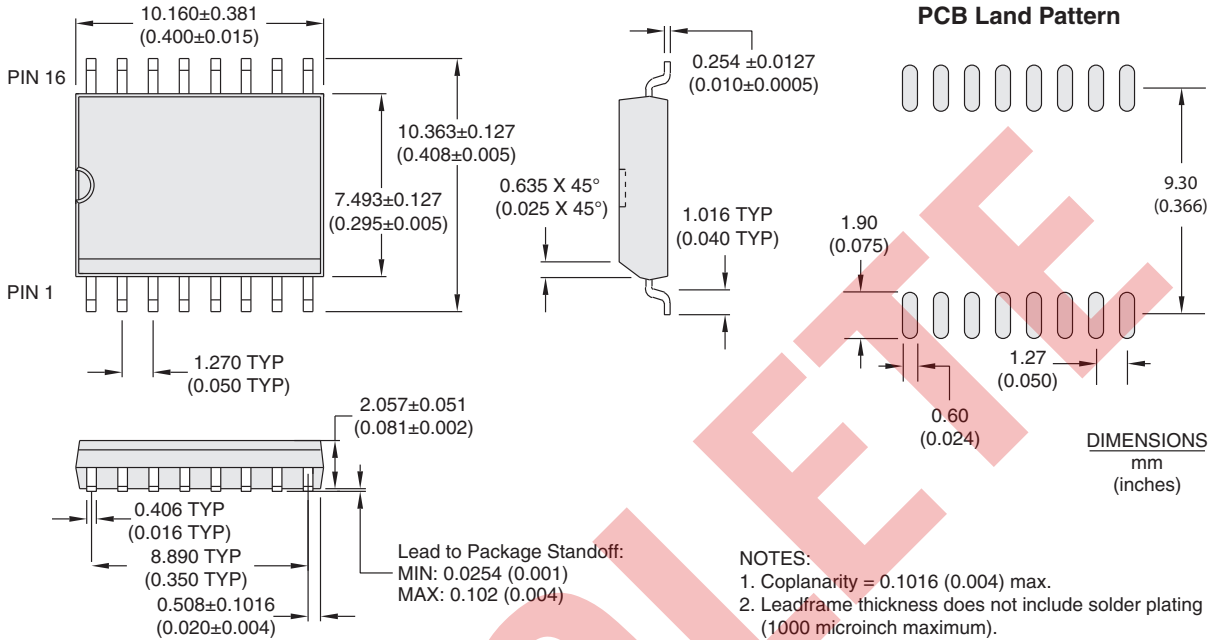

ITC117PLTR Tape & Reel

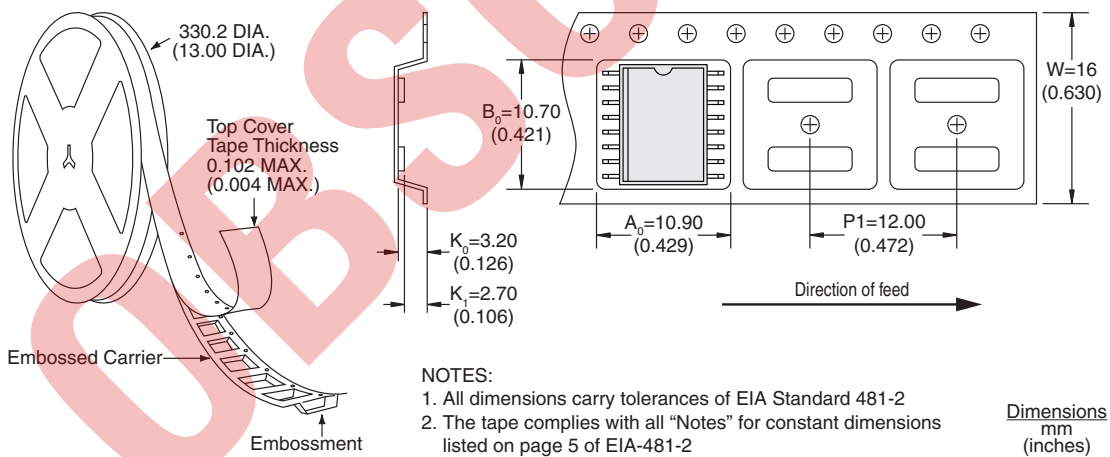

For additional information please visit our website at: <https://www.ixysic.com>