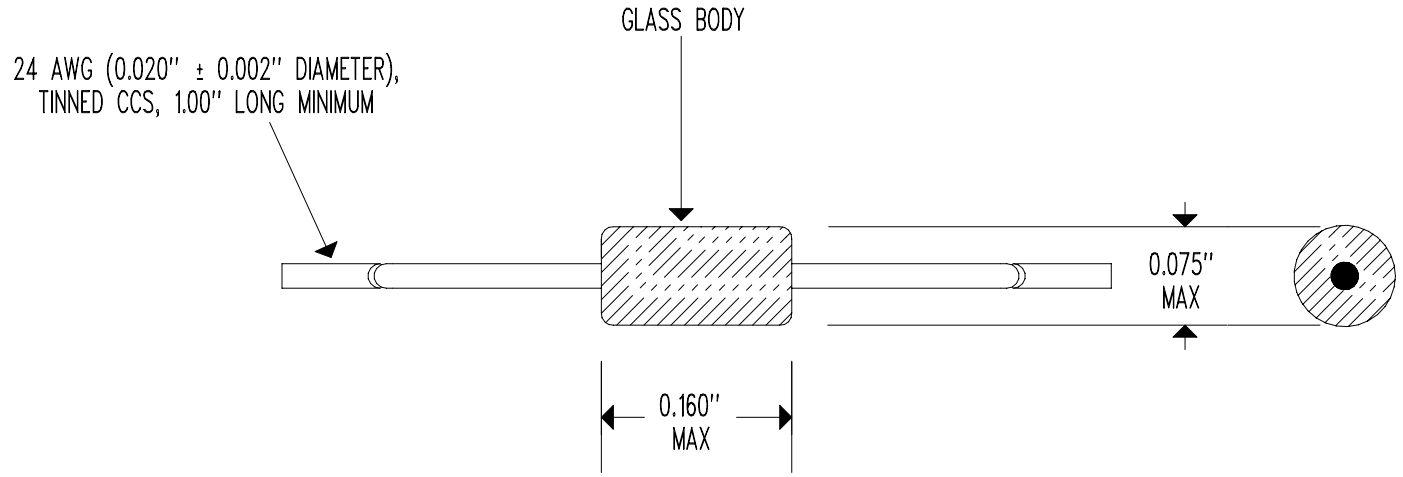

RESISTANCE @ +25°C = 330,000 Ω ± 10%
RESISTANCE/TEMPERATURE CURVE = "R"
BETA "β" (0 TO +50°C) = 4,140°K NOMINAL
BETA "β" (+25 TO +85°C) = 4,263°K NOMINAL
TEMPERATURE COEFFICIENT @ +25°C = -4.68%/°C NOMINAL
DISSIPATION CONSTANT = 2 mW/°C NOMINAL (STILL AIR)
THERMAL TIME CONSTANT = 5 SECONDS NOMINAL (STILL AIR)
THERMAL TIME CONSTANT = 0.5 SECONDS NOMINAL (WELL STIRRED OIL)
MAXIMUM TEMPERATURE RATING = +300°C

NONE	RELEASE TO PRODUCTION	01/28/14	DD
REV	REVISION RECORD	DATE	APP

SCALE NONE

DRAWN BY
DAN DANKERT

DATE 01/28/14

REV. NONE

LAYER 0 OF 1

U.S. SENSOR CORP.

714-639-1000 www.ussensor.com

NTC THERMISTOR

P/N 334RG1K