

# High Voltage Rectifiers

$$V_{RRM} = 3200 \text{ V}$$

$$I_{F(AV)M} = 22.9 \text{ A}$$

$V_{RRM}$ V	Standard Types	Power Designation
3200	UGE 0421 AY4	Si-E 1125 / 500-6



Symbol	Conditions	Maximum Ratings
$I_{F(RMS)}$	air self cooling, $T_{amb} = 45^{\circ}\text{C}$ - without cooling plate - with colling plate	40 A
$I_{F(AV)M}$		7.4 A
		10.9 A
	forced air cooling; $v = 3 \text{ m/s}$ ;	$T_{amb} = 35^{\circ}\text{C}$ - without cooling plate - with colling plate
		14.2 A 18.8 A
	oil cooling;	$T_{amb} = 35^{\circ}\text{C}$ - without cooling plate - with colling plate
		19.7 A 22.9 A
$P_{RSM}$	$T_{VJ} = 150^{\circ}\text{C}$ ; $t_p = 10 \mu\text{s}$	7 kW
$I_{FSM}$	non repetitive, 50 c/s (for 60 c/s add 10%) $T_{VJ} = 45^{\circ}\text{C}$ ; $t_p = 10 \text{ ms}$	300 A
	$T_{VJ} = 150^{\circ}\text{C}$ ; $t_p = 10 \text{ ms}$	250 A
$T_{VJ}$		-40...+150 $^{\circ}\text{C}$
$T_{stg}$		-40...+150 $^{\circ}\text{C}$
$T_{VJM}$		150 $^{\circ}\text{C}$

<b>Weight</b>	115 g
---------------	-------

Symbol	Conditions	Characteristic Values
$I_R$	$V_R = V_{RRM}$ $T_{VJ} = 150^{\circ}\text{C}$	$\leq 2 \text{ mA}$
$V_F$	$I_F = 55 \text{ A}$ $T_{VJ} = 25^{\circ}\text{C}$	2.72 V
$V_{T0}$	$T_{VJ} = 150^{\circ}\text{C}$	1,7 V
$r_T$	$T_{VJ} = 150^{\circ}\text{C}$	16 $\text{m}\Omega$
$a$	$f = 50\text{Hz}$	5 x 9.81 $\text{m/s}^2$
$M_d$		8 Nm

Data according to IEC 60747-2

## Features

- Hermetically sealed Epoxy
- Use in oil
- Avalanche characteristics


## Applications

- X-Ray equipment
- Electrostatic dust precipitators
- Electronic beam welding
- Lasers
- Cable test equipment

## Advantages

- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits
- Series and parallel operation

## Dimensions in mm (1 mm = 0.0394")

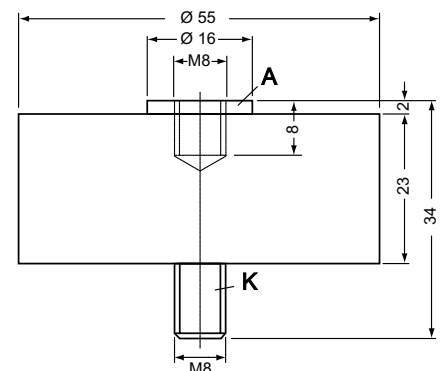


## Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).

IXYS reserves the right to change limits, test conditions and dimensions.


20200123a

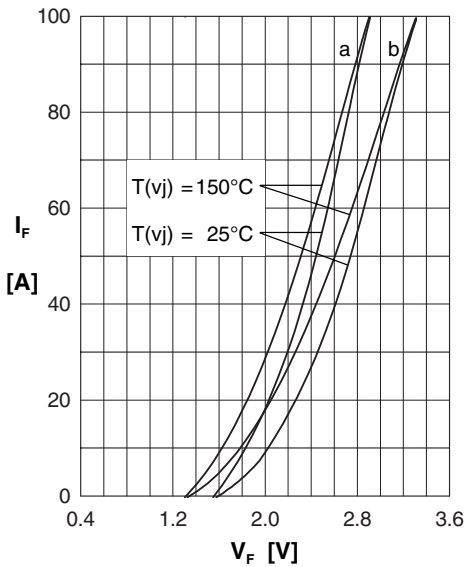


**Fig. 1: Forward characteristics**  
 Instantaneous forward current  $I_F$  as a function of instantaneous forward voltage drop  $V_F$  for junction temperature  $T_{(vj)} = 25^\circ\text{C}$  and  $T_{(vj)} = 150^\circ\text{C}$   
 a = Mean value characteristic  
 b = Limit value characteristic

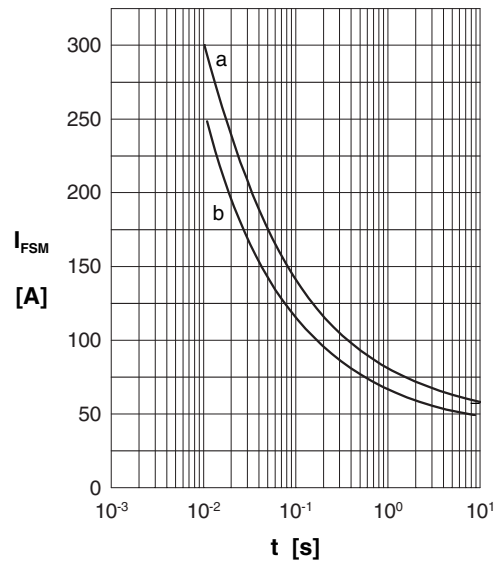

**Fig. 2: Characteristics of maximum permissible current**  
 The curves show the non repetitive peak one cycle surge forward current  $I_{FSM}$  as a function of time  $t$  and serve for rating protective devices.  
 a = Initial state  $T_{(vj)} = 45^\circ\text{C}$   
 b = Initial state  $T_{(vj)} = 150^\circ\text{C}$

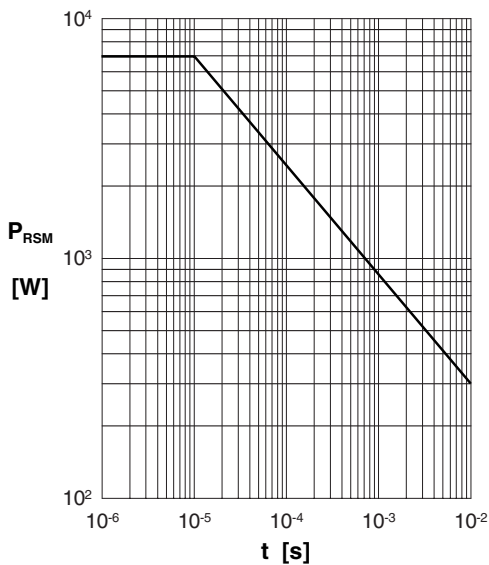

**Fig. 3: Power loss**  
 Non repetitive peak reverse power loss  $P_{RSM}$  as a function of time  $t$ ,  $T_{(vj)} = 150^\circ\text{C}$

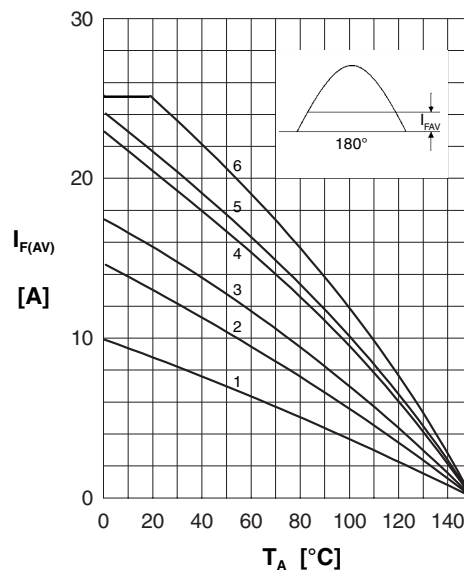

**Fig. 4: Load diagram**  
 Mean forward current  $I_{F(AV)}$  of one module for a sine half wave for various cooling modes as a function of the cooling medium temperature  $T_{amb}$  for a resistive load (horizontal mounting).

**Cooling modes**

- |                        |         |               |
|------------------------|---------|---------------|
| 1 = air self cooling   | without | cooling plate |
| 2 = air self cooling   | with    | cooling plate |
| 3 = forced air cooling | without | cooling plate |
| 4 = forced air cooling | with    | cooling plate |
| 5 = oil cooling        | without | cooling plate |
| 6 = oil cooling        | with    | cooling plate |