


High Voltage Rectifiers

$$V_{RRM} = 8000 \text{ V}$$

$$I_{F(AV)M} = 4.2 \text{ A}$$

| V_{RRM} | Standard | Power Designation |
|-----------|--------------|----------------------|
| V | Types | |
| 8000 | UGE 1112 AY4 | Si-E 3000 / 1300-2.5 |

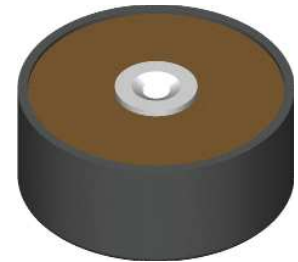

| Symbol | Conditions | Maximum Ratings |
|------------------------------|--|-----------------------|
| $I_{F(RMS)}$ $I_{F(AV)M}$ | air self cooling; $T_{amb} = 45^\circ\text{C}$ - without cooling plate - with colling plate | 7 A 2.0 A 2.5 A |
| | forced air cooling; $v = 3 \text{ m/s}$, $T_{amb} = 35^\circ\text{C}$ - without cooling plate - with colling plate | 3.2 A 4.1 A |
| | oil cooling; $T_{amb} = 35^\circ\text{C}$ - without cooling plate - with colling plate | 4.2 A 4.2 A |
| P_{RSM} | $T_{VJ} = 150^\circ\text{C}$; $t_p = 10 \mu\text{s}$ | 2.5 kW |
| I_{FSM} | non repetitive, 50 c/s (for 60 c/s add 10%) $T_{VJ} = 45^\circ\text{C}$; $t_p = 10 \text{ ms}$ | 120 A |
| | $T_{VJ} = 150^\circ\text{C}$; $t_p = 10 \text{ ms}$ | 100 A |
| T_{VJ} | | -40...+150 °C |
| T_{stg} | | -40...+150 °C |
| T_{VJM} | | 150 °C |
| Weight | | 122 g |

| Symbol | Conditions | Characteristic Values |
|----------|---|---------------------------|
| I_R | $V_R = V_{RRM}$ $T_{VJ} = 150^\circ\text{C}$ | $\leq 1 \text{ mA}$ |
| V_F | $I_F = 7 \text{ A}$ $T_{VJ} = 25^\circ\text{C}$ | 6.25 V |
| V_{T0} | $T_{VJ} = 150^\circ\text{C}$ | 4.25 V |
| r_T | $T_{VJ} = 150^\circ\text{C}$ | 215 mΩ |
| a | $f = 50\text{Hz}$ | 5 x 9.81 m/s ² |
| M_d | | 8 Nm |

Data according to IEC 60747-2

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

IXYS reserve the right to change limits, test conditions and dimensions.

20200123a

Features

- Hermetically sealed Epoxy
- Use in oil
- Avalanche characteristics


Applications

- X-Ray equipment
- Electrostatic dust precipitators
- Electronic beam welding
- Lasers
- Cable test equipment

Advantages

- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits
- Series and parallel operation

Dimensions in mm (1 mm = 0.0394")

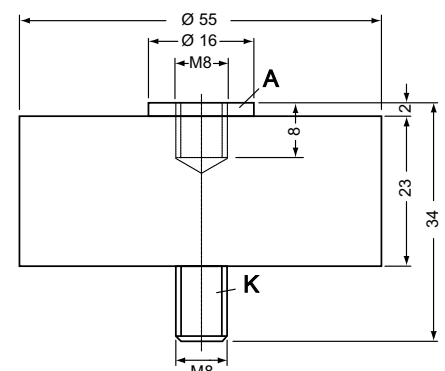

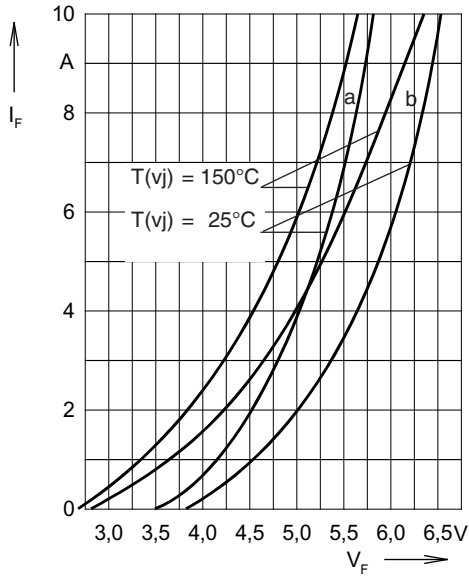


Fig. 1: Forward characteristics
Instantaneous forward current I_F as a function of instantaneous forward voltage drop V_F for junction temperature $T_{(vj)} = 25^\circ\text{C}$ and $T_{(vj)} = 150^\circ\text{C}$
a = Mean value characteristic
b = Limit value characteristic

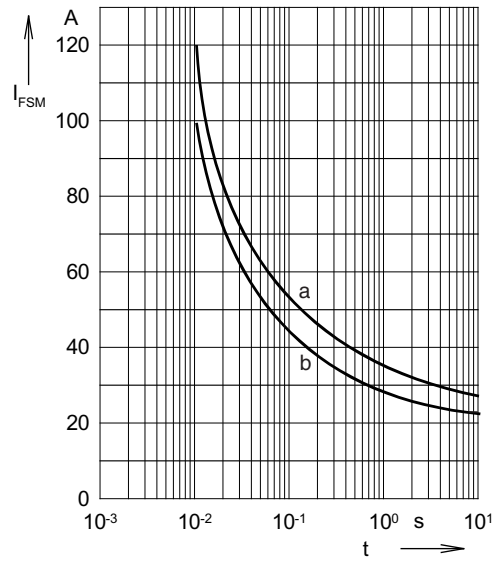


Fig. 2: Characteristics of maximum permissible current
The curves show the non repetitive peak one cycle surge forward current I_{FSM} as a function of time t and serve for rating protective devices.
a = Initial state $T_{(vj)} = 45^\circ\text{C}$
b = Initial state $T_{(vj)} = 150^\circ\text{C}$

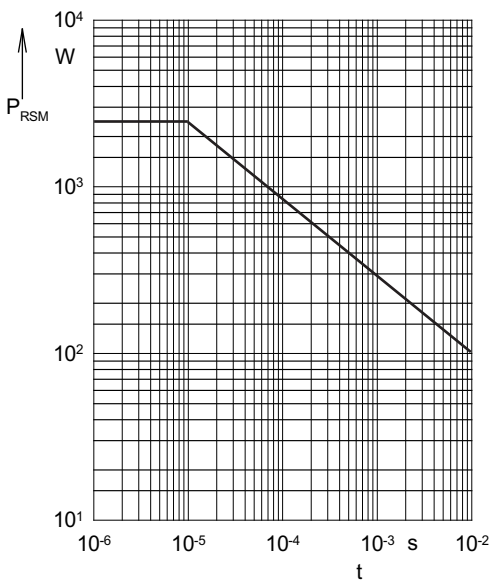


Fig. 3: Power loss
Non repetitive peak reverse power loss P_{RSM} as a function of time t , $T_{(vj)} = 150^\circ\text{C}$

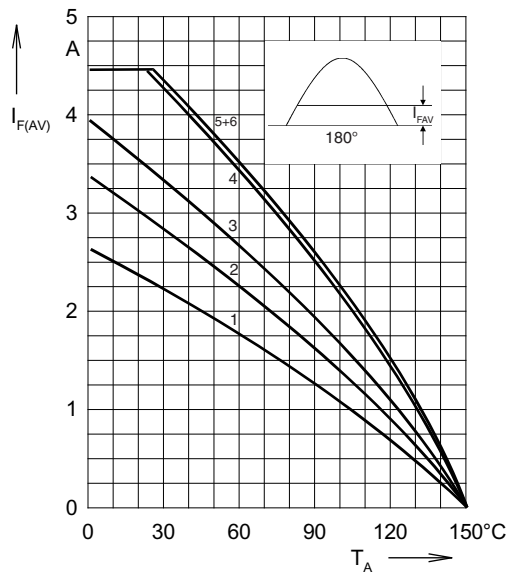


Fig. 4: Load diagram
Mean forward current $I_{F(AV)}$ of one module for a sine half wave for various cooling modes as a function of the cooling medium temperature T_{amb} for a resistive load (horizontal mounting).

Cooling modes

| | | | |
|-----|--------------------|---------|---------------|
| 1 = | air self cooling | without | cooling plate |
| 2 = | air self cooling | with | cooling plate |
| 3 = | forced air cooling | without | cooling plate |
| 4 = | forced air cooling | with | cooling plate |
| 5 = | oil cooling | without | cooling plate |
| 6 = | oil cooling | with | cooling plate |

IXYS reserve the right to change limits, test conditions and dimensions.