CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

PART NUMBER	COVER OPENINGS
04980915ZXT	E F

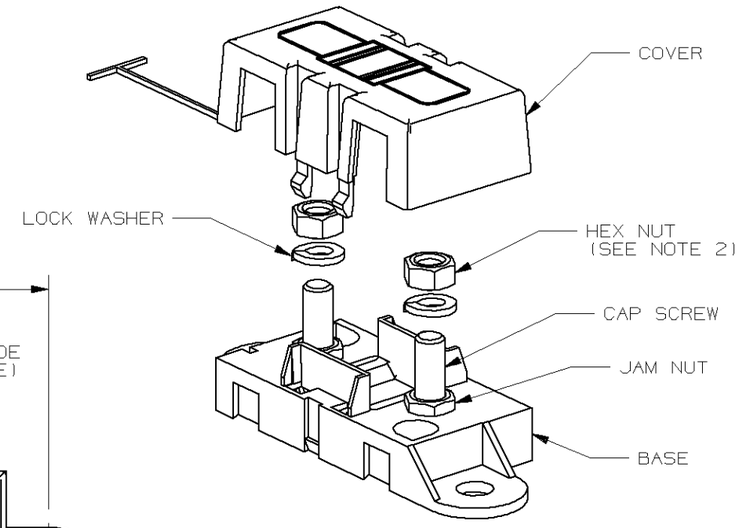

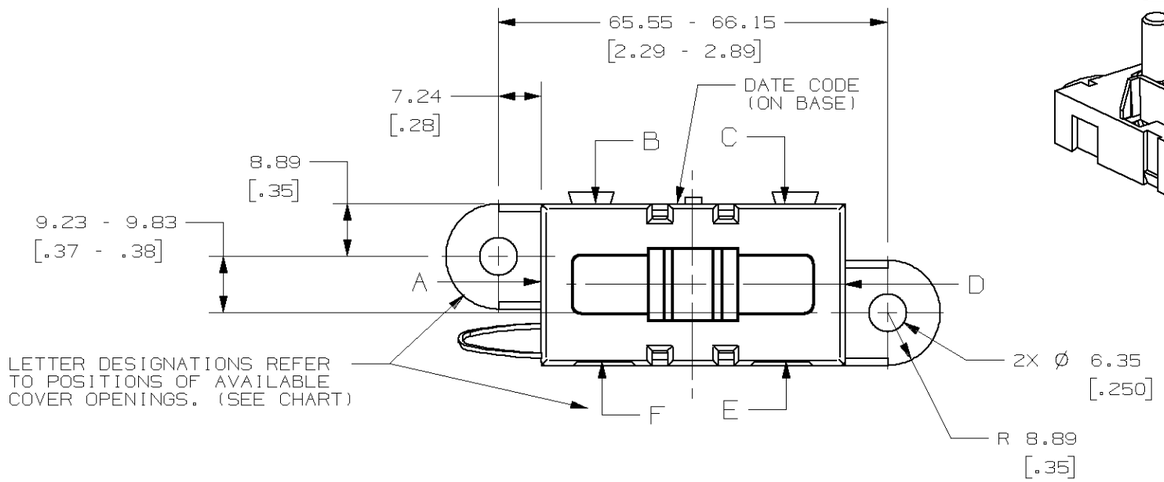

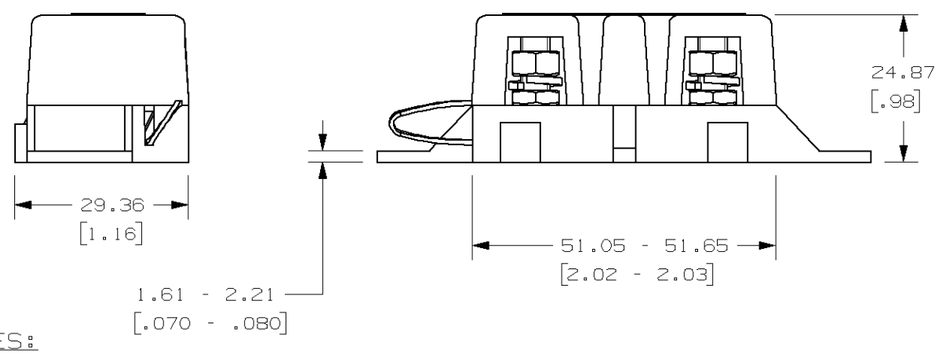

NOTES:

1. TAB OF COVER TIE IS INSERTED INTO HOLE IN BASE.
2. TORQUE REQUIRED FOR HEX NUT TO BE 4.0 - 5.0 NEWTON METERS (35-44 IN-LBS).
3. CAP SCREW AND NUTS - M5 X 0.8 - AND WASHERS, STEEL, ZINC PLATE WITH TRIVALENT CHROMATE, LEACHED AND SEALED, INTEGRAL TORQUE CONTROL LUBRICANT FINISH. (MEETS 96 HR. ASTM STD. B-117 SALT SPRAY REQ.).
4. HOLDER MEETS L/F VALIDATION TEST SPEC. VS-005004.

METRIC

U/M | QTY/M | DESCRIPTION | COMPONENT NO

BILL OF MATERIAL

MATL SPEC

FINISH

COPIES TO 1 9 18 2 10 19 3 12 20 4 13 21 5 14 23 6 15 33 7 16 43 8 17 53

DRW DJG 05/25/05 | CHK DATE | APPD DATE

SCALE 1:1 | SUPER DR | FINSH GOOD WT GRAMS/PIECE

TOLERANCE UNLESS OTHERWISE SPECIFIED
THREE PLACE DEC +/-.100
ANGULAR +/-1°
ONE PLACE DEC +/-.25
TWO PLACE DEC +/-.13

TITLE
MIDI FUSE HOLDER

3RD ANGLE PROJECTION

Littelfuse
DES PLAINES, ILLINOIS 60016

REVISION B | DRWG. NO. 04980915ZXT | OUTLINE

LTR	DATE	REVISION	CHK	APD
A	05/25/05	61735 - RELEASE DJG		
B	06/08/07	85460D-REDRAWN IN UG, ADDED TOLERANCE TO DIMENSIONS, 7.24 WAS 8.19 GMB		

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [ ] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎ DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS

CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE