CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

REVISION MARKING	
REVISION LETTER	COMMENT
B	RELEASED (PER 000820ER)

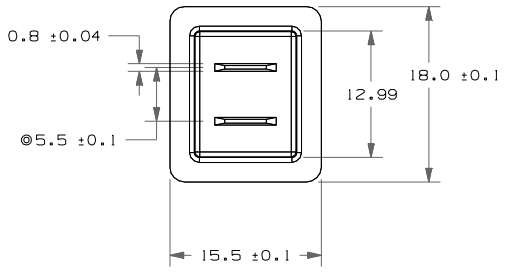







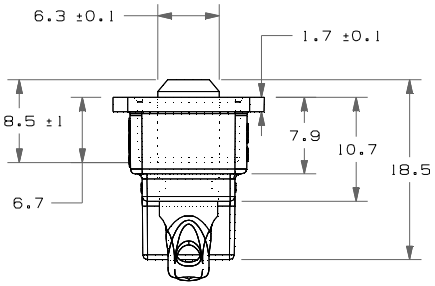

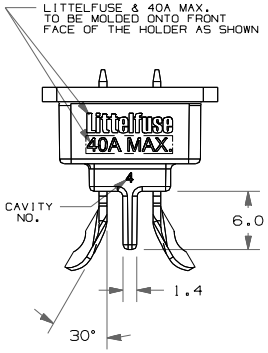

NOTES :

1. MATERIAL: HOLDER- NY PA66,70G13HS1L,BLACK
   TERMINAL- C1100 1/2H,Tin-Plated 5-8um
2. TERMINAL: IN MOLDE ONTO THE HOLDER
   NO BURRS ALLOWED
   MUST BE SOLDERABLE
3. [ ] CURRENT RATING IS CHANGABLE INSERT
4. PUSH PULL FORCE REQUIRED TO BE 5 NEWTON METERS PER ISO 8820.
5. OVER LOAD TEST: 100% AND 135%



METRIC
COMPONENT

BILL OF MATERIAL

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [ ] ARE INCHES
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS. -MINIMUM CPK VALUE
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
CP	DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

COPIES TO

1	9	18
2	10	19
3	12	20
4	13	21
5	14	23
6	15	33
7	16	43
8	17	53

MATL SPEC SEE NOTES

FINISH SEE NOTES

DRW	N.ROQUE	DATE 01/26/10
CHK		DATE
APPD		DATE

SCALE 2:1

SUPER DR

FINSH GOOD WT 2.72 GRAMS/PIECE

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-fH)

DIMENSION	UP TO 3	OVER 3 UP TO 6	OVER 6 UP TO 30	OVER 30 UP TO 120	OVER 120 UP TO 400
	0.5 - 3				
TOLERANCE	±0.05	±0.05	±0.1	±0.15	±0.2

3RD ANGLE PROJECTION

TITLE HOLDER-JCASE W/SOLDERING TABS

Littelfuse
LIPA CITY, BATANGAS, PHILIPPINES

REVISION A

DRWG. NO. OL-OFHJ3003U

OUTLINE

LTR	DATE	REVISION	CHK	APD
A	01/26/10	SAB6-RELEASED NR		