PART NUMBER	"A"	"B"	"C"	"D"	LEAD "A" COLOR	LEAD "B" COLOR	LEAD "A" SIZE	LEAD "B" SIZE	LEAD "A" STRIP	LEAD "B" STRIP	INSULATION TYPE
OFHM0003ZXJT-F5	70±5 [2.76±0.20]	165.5±5 [6.52±0.20]	NO STRIP	NO STRIP	BLACK	BLACK	18 AWG	18 AWG	N/A	N/A	TXL

LTR	DATE	REVISION	CHK	APD
A	28/Jan/16	515497GCA - NEW RELEASE FYUE		
B	18/May/16	515902ECA-CANCEL WIRE END STRIP FYUE		
C	14/Feb/17	517136ECC-ADD FUSE ASSEMBLY DIMENSION FYUE		

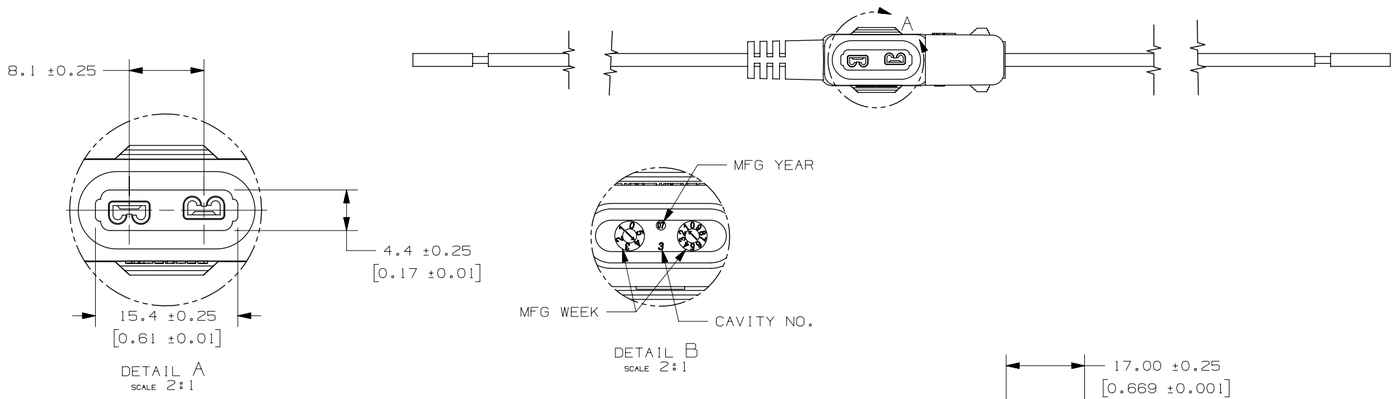

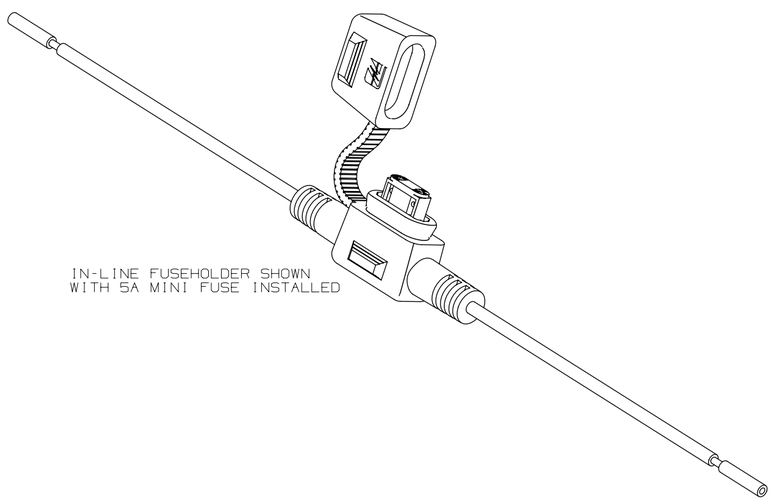

NOTES:
1. HOLDER MATERIAL: BLACK TPV
2. CONTACTS: COPPER ALLOY: TIN-PLATED
3. WIRE: STRANDED COPPER, 125°C RATED, 18AWG TXL WIRE
4. CRIMP: MUST MEET SAE/USCAR 21 STANDARD
5. FUSE RATING: 5A, 32Vdc
6. FUSEHOLDERS SHOULD NOT BE PLACED UNDER TENSION IN FINAL APPLICATION
7. MAX TEMPERATURE 125°C
8. THE HOLDER IS SHIPPED WITH COVER CLOSED

METRIC

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

COPIES TO
1 9 18
2 10 19
3 12 20
4 13 21
5 14 23
6 15 33
7 16 43
8 17 53

MATL SPEC: SEE NOTES

FINISH: SEE NOTES

DRW	DATE	SCALE
FYUE	28/Jan/16	1:1
CHK	DATE	SUPER DR
APPD	DATE	FINSH GOOD WT GRAMS/PIECE

TOLERANCE UNLESS OTHERWISE SPECIFIED
ONE PLACE DEC +/-.3
TWO PLACE DEC +/-.15
THREE PLACE DEC +/-.100
ANGULAR +/-1°

3RD ANGLE PROJECTION

TITLE: MINI IN-LINE FUSEHOLDER WITH 5A FUSE

Littelfuse®
DES PLAINES, ILLINOIS 60016

REVISION: C

DRWG. NO. OFHM0003ZXJT-F5

OUTLINE

CAD GENERATED DRAWING – NO PENCIL CHANGES ALLOWED