


METRIC COMPONENT

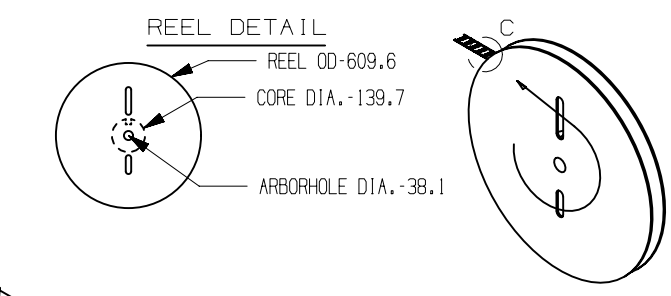

NOTE:  
 1. MATERIAL: C2300 BRASS T-0.35mm, TIN PLATED  
 2. EVERY REEL QUANTITY: 2000 ± 10PCS (ROLL BAND)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.  
 TOLERANCE  
 DECIMALS ANGULAR  
 X ± 0.25 ± 1°  
 XX ± 0.13  
 DO NOT SCALE DRAWING

LITTELFUSE PART NO.	REELED	REVERSE REEL	WIRE GAGE	INTERLEAF	GRIP TYPE			
					A	B	C	D
913-007	YES	NO	10	YES	5.08	5.08	7.11	6.10
913-007-R	YES	YES	10	YES	5.08	5.08	7.11	6.10
913-007-001	NO	NO	10	NO	5.08	5.08	7.11	6.10
913-008	YES	NO	14	YES	4.06	4.06	5.33	4.83
913-008-R	YES	YES	14	YES	4.06	4.06	5.33	4.83
913-008-001	NO	NO	14	NO	4.06	4.06	5.33	4.83

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
BILL OF MATERIAL				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.				
⊙	DENOTES CRITICAL CHARACTERISTICS.			
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE			
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS			
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE			

COPIES TO		MATERIAL SPEC		SEE NOTE	
1	9	FINISH	SEE NOTE	SCALE	2:1
2	10	DRW	EJIN	DATE	12/12/11
3	12	CHK		DATE	SUPER DR
4	13	APPD		DATE	FINISH GOOD WT
5	14	TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-FH)		GRAMS/PIECE	
6	15	DIMENSION		UP TO	UP TO
7	16	TOLERANCE		OVER	OVER
8	17	3RD ANGLE PROJECTION		UP TO	UP TO
18	18	TITLE		UP TO	UP TO
19	19	CRIMP TERMINAL WITH INSULATION GRIP		UP TO	UP TO
20	20	REVISION		UP TO	UP TO
21	21	CHK		UP TO	UP TO
22	22	APD		UP TO	UP TO
23	23	LITTELFUSE		UP TO	UP TO
24	24	DES PLAINES, ILLINOIS 60016		UP TO	UP TO
25	25	REVISED		UP TO	UP TO
26	26	DRAWING NO.		UP TO	UP TO
27	27	OL-913-007		UP TO	UP TO
28	28	OUTLINE		UP TO	UP TO