




THIS DRAWING AND THE INFORMATION CONTAINED WITHIN IT ARE CONFIDENTIAL AND MAY NOT BE COPIED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF LITTELFUSE.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	GCF #524724. INITIAL RELEASED. D.SILVA.	1/25/2022	L.ARGIL

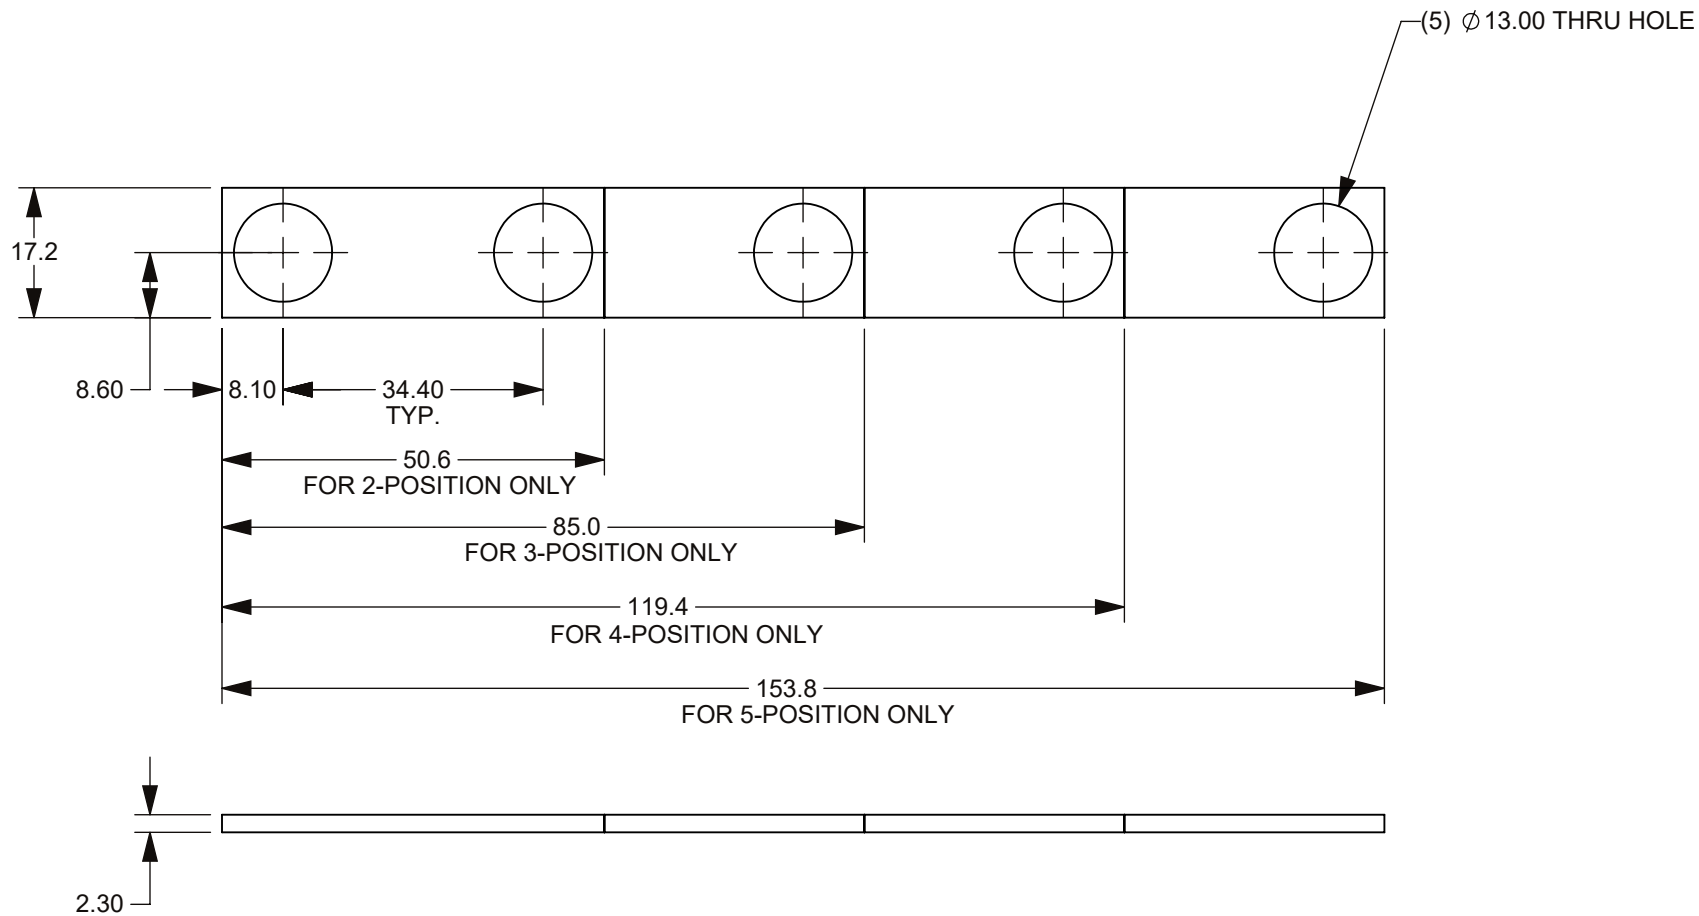

#	DESCRIPTION	PART #
A	2-POSITION	882-839-2
B	3-POSITION	882-839-3
C	4-POSITION	882-839-4
D	5-POSITION	882-839-5

NOTES:
1. MATERIAL: COPPER ALLOY, TIN-PLATED.
2. ALL DIMENSIONS APPLY AFTER PLATING.

NO.		COMPONENT NO.		COMPONENT NAME		QTY		U	
TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-fH)									
.5 to 3	>3 to 6	>6 to 30	>30 to 120	>120 to 400					ANGLE
±0.05	±0.05	±0.10	±0.15	±0.2					NONE
DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSI/ASME Y14.5-1994.									
PER CHL-NPD20-0008 PROCEDURE			FIT/ FUNCTION CRITICAL CHARACTERISTICS						
	<S>		SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL						
	CPK		DENOTES CPK DIMENSIONS MINIMUM CPK VALUE						
			DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE.PROCEDURE FOR MEASUREMENTAND TRACKINGTO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS						
	CP		DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE						
		NAME		DATE		 Littelfuse® Expertise Applied Answers Delivered			
DRAWN		D.SILVA		1/4/2022					
CHECKED		-		-					
		-		-					
		-		-					
FORM NO: CVP-PE40-0003 REV B				TITLE BUS BAR FOR FLEX MEGA HOLDER		SIZE B DWG. NO. OUTLINE		REV. A	
THIRD ANGLE PROJECTION									
		DO NOT SCALE DRAWING		SCALE 1:1		OL-882-839-0		SHEET 1 OF 1	