
REVISIONS


 ZONE
 REV.
 DESCRIPTION
 DATE
 APPROVED


 A
 GCF#524714 INITIAL RELEASE
 JAN./10/2022
 D. ZHANG

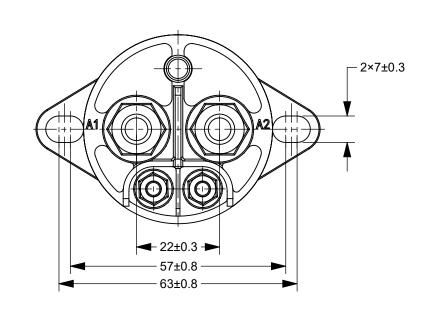



F

Α





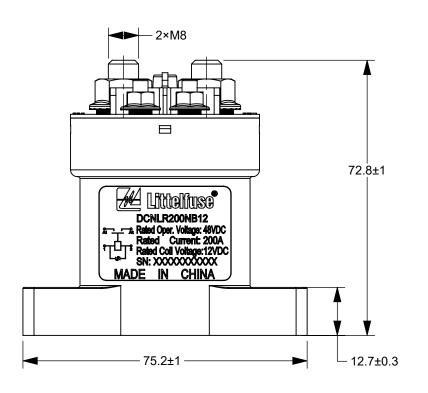

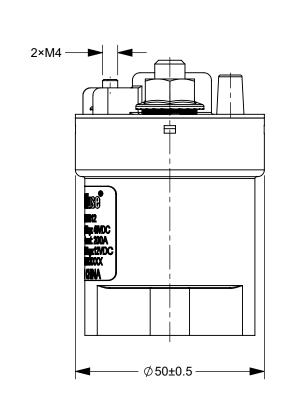

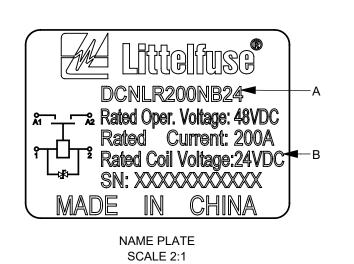


		TABLE 1			
PART NUI	MBER	DCNLR200NB12	DCNLR200NB24	DCNLR200NB48	DCNLR200NB60
HOLD PO	9.5W				
MAXIMUM CONTA	60V DC				
RETAD CONTAC	48V DC				
RATED CONTACT CL	200A				
RATED COIL \	12V DC	24V DC	48V DC	60V DC	
OPERATING VOLTAGE	PICKUP	9V MAX	18V MAX	36V MAX	45V MAX
(COLD STATE @ 25°C)	RELEASE	1V MIN	2V MIN	4V MIN	5V MIN
	OPERATE TIME	MAX 25ms			
OPERATING TIME (COLD STATE @ 25°C)	RELEASE TIME	MAX 12ms			
	BOUNCE TIME	MAX 7ms			
CONTACT VOLT	≤80mV @ 200A				
INSULATION RESISTAN	≥100MΩ				
DIELECTRIC STRENGTH (LE	2200V AC, 1 MINUTE				
ELECTRIC LIFE	30, 000 CYCLES (200A @ 48V DC)				
ELECTRIC LIFE	50, 000 CYCLES (200A @ 24V DC)				
MECHANICAL LIFE (No	200,000				
WORKING	CONTINUOUS				

TABLE 2 (CONFIGURATION)							
NO.	DN	N	DEMARK				
	PN	"A"	"B"	REMARK			
1	DCNLR200NB12	DCNLR200NB12	Rated Coil Voltage:12VDC				
2	DCNLR200NB24	DCNLR200NB24	Rated Coil Voltage:24VDC				
3	DCNLR200NB48	DCNLR200NB48	Rated Coil Voltage:48VDC				
4	DCNLR200NB60	DCNLR200NB60	Rated Coil Voltage:60VDC				

NOTES:

- 1. ALL DIMENSIONS ARE REFERENCE ONLY.
- 2. PRODUCT TYPE: SPST-NO.
- 2. SEE TABLE 2 FOR CONFIGURATION OF NAME PLATE, RATED COIL VOLTAGE AND PNs.
- 3. MATERIALS AND FINISH:
- 3.1 HOUSING : THERMOPLASTIC PLASTICS.
- 3.2 CONTACTS: COPPER ALLOY.
- 3.3 CONTACT STUDS: COPPER ALLOY.
- 3.4 COIL STUDS: COPPER ALLOY.
- 4. MAIN CONTACT M8 STUD, TORQUE: 8~12N•m, COIL CONTACT M4 STUD, TORQUE: 1.0~1.6N•m.
- 5. MOUNTTING: M5 BOLT, RECOMMENDED TORQUE: 4~6N•m.
- 6. CONTACTOR PARAMETERS ARE SHOWN IN TABLE 1.

DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSI/ASME Y14.5-1994.								
URE			FIT/ FUNCTION CRITICAL CHARACTERISTICS					
CEE	<s< td=""><td colspan="5">S> SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL</td></s<>	S> SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL						
38 PR(СР	K	DENOTES CPK DIMENSIONS MINIMUM CPK VALUE					
FIT/ FUNCTION CRITICAL CHARACTERISTICS SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL CPK DENOTES CPK DIMENSIONS MINIMUM CPK VALUE DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PERFORMANCE.PROCEDURE FOR MEASUREMENTAND TRACKINGT IN LITTELFUSE INSPECTION INSTRUCTIONS CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN TO ALLOW FOR MAXIMUM TOOL LIFE				RE FOR MEASUREMENTAND TRACKINGTO BE DEFINED				
PER CHI-	CI	0	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE					
	NAME DRAWN JY. SHI		NAME	DATE	Littelfuse Littelfuse			
-			SHI	May/19/2021				
CHE	CKED	J. LI -		May/26/2021		Expertise Applied Answers Delivered		
		-		-	TITLE	F		
FORM NO: CVP-PE40-0005 REV B				DCNLR 200A 48V NP CONTACTOR				
THIRD ANGLE PROJECTION			IECTION					
			\pm		OUTLINE OL-DCNLR200NB,CHT B			
DO NOT SCALE DRAWING			RAWING	SCALE	1:1 SHEET 1 OF 1			

1

С

В

8 7 6 5 4 3 2