

- 4
- 3
- 2
- 1
- NOTES:
1. DRAWING SHOWN WITH FUSES INSTALLED, FUSE LOADING CONFIGURATION DEPENDANT
2. ALL STUDS TO BE STAINLESS STEEL WITH ROLLED THREADS
3. ALL BUS BARS TO BE TIN PLATED COPPER
4. WEIGHT: 0.8 LB
5. RECCOMENDED TORQUE VALUES:

1. MIDI FUSES - 3 N-m(27 IN-LB)






2. RECOMMENDED INPUT TERMINAL STUD NUT TORQUE - 20 N-m(15 FT-LB)

3. RECOMMENDED OUTPUT TERMINAL STUD NUT TORQUE - 20 N-m(15 FT-LB)
6. DRAWING SHOWN WITHOUT OPTIONAL LABEL, LABEL LOCATED ON OUTSIDE OF COVER
7. INCLUDED HARDWARE (TO BE INSTALLED AT LESS THAN 300 RPM);

4. M8x1.25 18-8 STAINLESS STEEL 4X
8. CONNECTOR HOUSING: FCI APEX 2.8MM FEMALE 4-WAY
FCI P/N: 54200409
9. MATERIAL:

HOUSING: GLASS FILLED NYLON 94V-0 COVER: PC 94V-0
10. MIN/MAX TEMPERATURE RATING: OPESTRATIONAL: -40C~100C NON-OPERATIONAL: -55C~125C
11. MAX CURRENT INPUT: 350 AMPS

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	PER ECH515700: INITIAL RELEASE OUTLINE DRAWING	3/22/2016	J. LIU

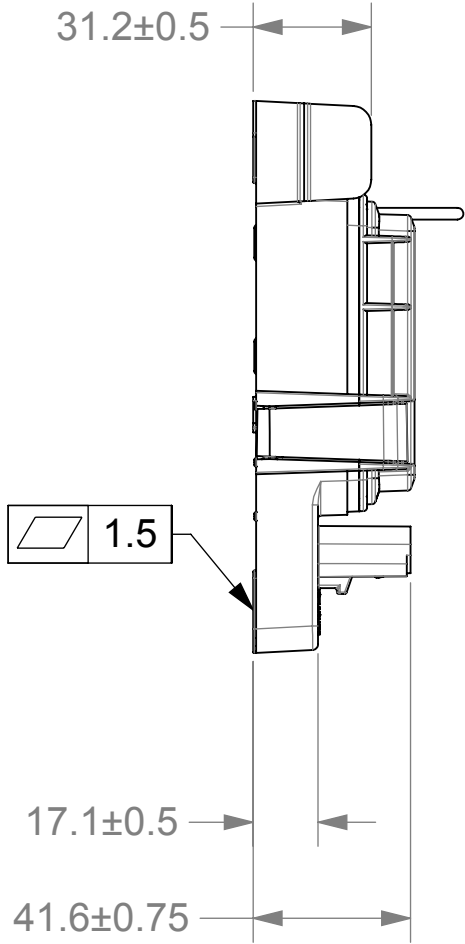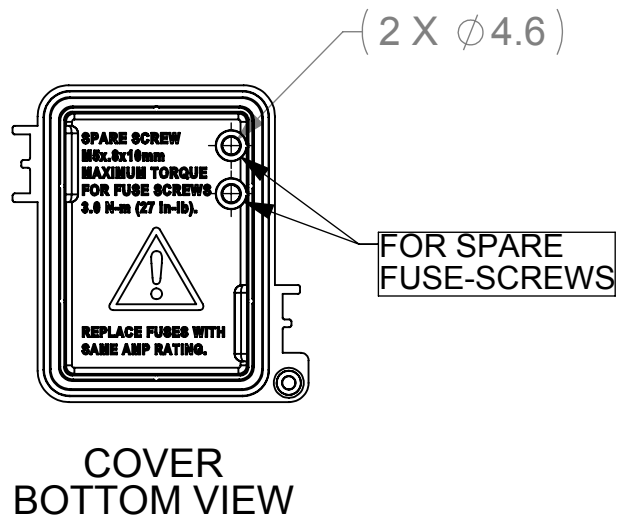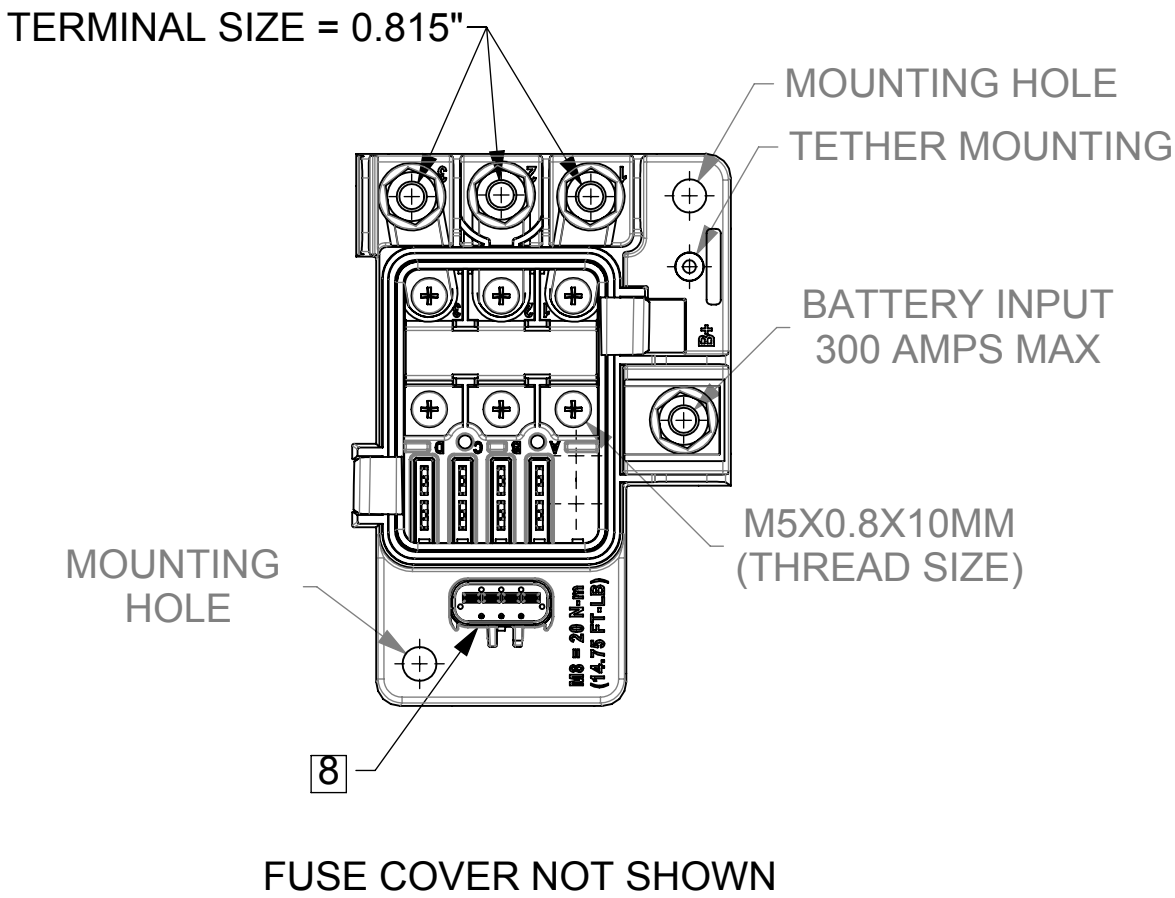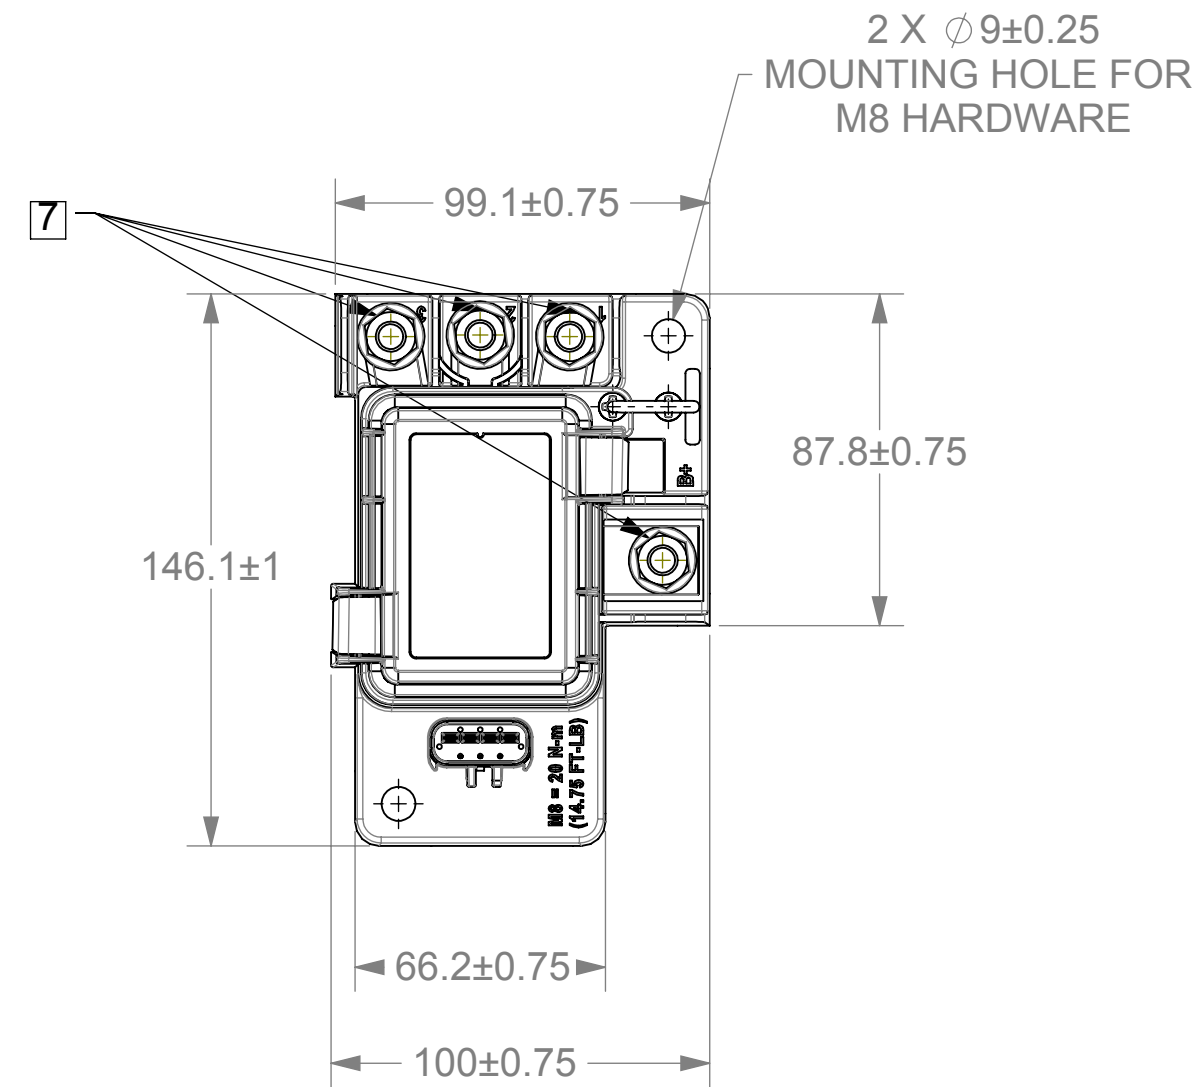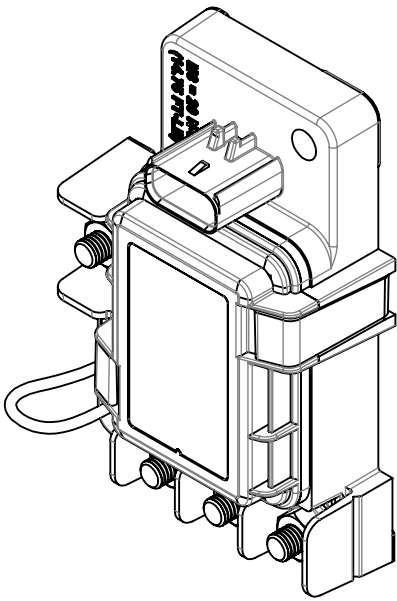


DIMENSIONS ARE IN MM.

DIMENSIONS AND TOLERANCES
ARE DEFINED ACCORDING TO
ANSI / ASME Y14.5M-1994

THIS DRAWING AND THE
INFORMATION CONTAINED WITHIN
IT ARE CONFIDENTIAL AND MAY
NOT BE COPIED OR DISCLOSED
WITHOUT THE WRITTEN
PERMISSION OF LITTELFUSE.

	NAME	DATE
DRAWN	J. LIU	3/22/2016
CHECKED	-	-
-	-	-
-	-	-
-	-	-



805 W. Orchard DR., Ste. 6, Bellingham, WA 98225
Phone (360)738-9010 Fax (360)738-0372

Power Distribution Module w/cover

SIZE	DWG. NO.	REV.
C	OL-880073	A

SCALE 1:2 SHEET 1 OF 1