


PART NO.	CAT. NO.	AMP	TERMINATION STYLE
LTFD0101ZX1	LTFD101-1	125A	1
LTFD0101ZX2	LTFD101-2	125A	2
LTFD0101ZX3	LTFD101-3	125A	3
LTFD0101ZX4	LTFD101-4	70A	4

NOTE:
1. BULLETS & STUDS ARE NOT REMOVABLE



REVISION		
REV	DATE	DESCRIPTION
A	2/14/23	526226GCP - RELEASE MRY

INTERNAL SCHEMATIC


ALARM CIRCUIT ACTIVATES THROUGH LINE TERMINAL

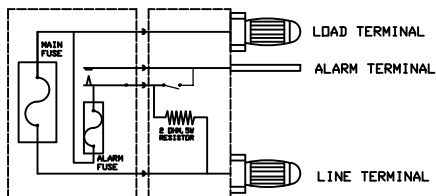


REMOVABLE CARTRIDGE MAIN HOUSING

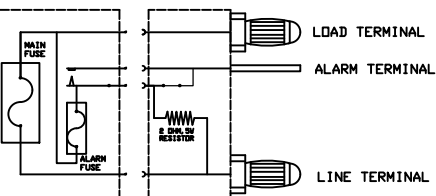



SCREW
STYLE 2

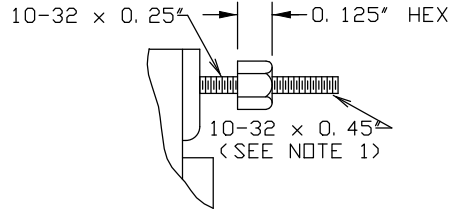

STUD
STYLE 3

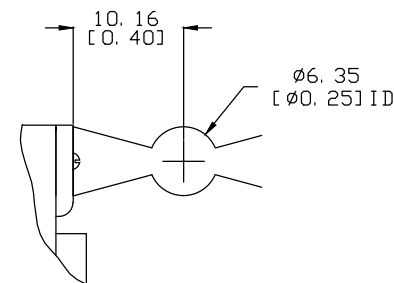

C CLIP
STYLE 4

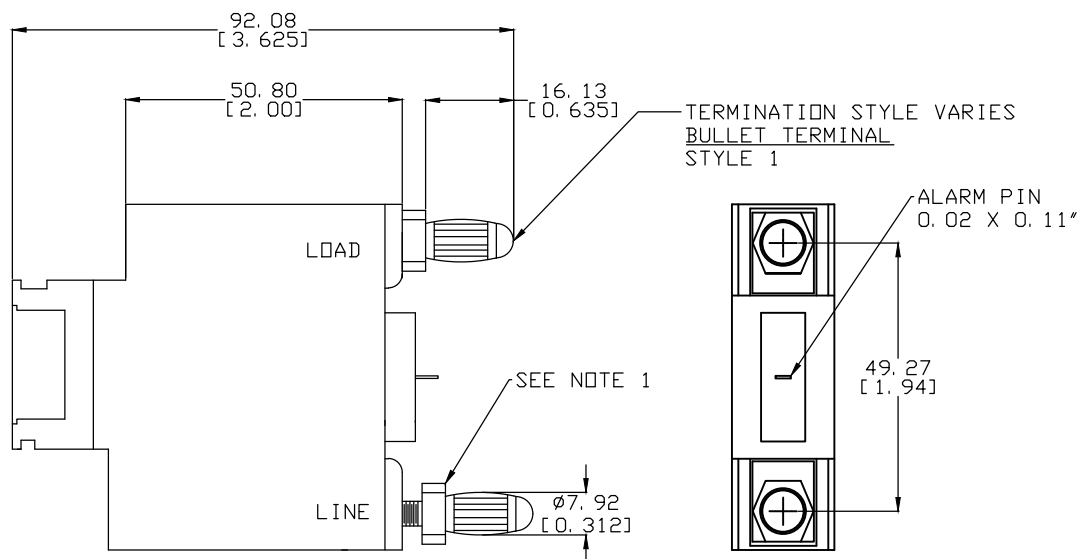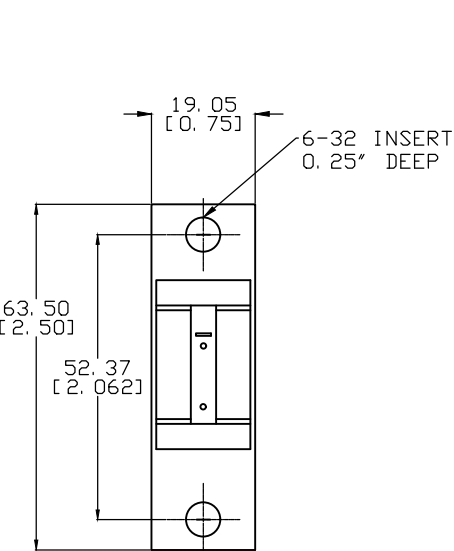

NO		COMPONENT NO		DESCRIPTION		QTY/M		U/M	
BILL OF MATERIAL									
<S>		CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE							
●		DENOTES CRITICAL CHARACTERISTICS.							
CPK		DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE							
ST		DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.							
CP		DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.							
MATL SPEC					FINISH				
DRW myork			DATE 2/13/23		SCALE NTS			FINISH GOOD WT GRAMS/PIECE	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994									
3RD ANGLE PROJECTION									
TITLE									
LTFD0101ZX1 THRU ZX4 OUTLINE									
					REVISION		DRWG NO.		SHEET 1 OF 1
					A		OL-LTFD0101		