
REVISION					
REV	DATE	DESCRIPTION			
Α	8/26/22	525614GCP - RELEASE MRY			

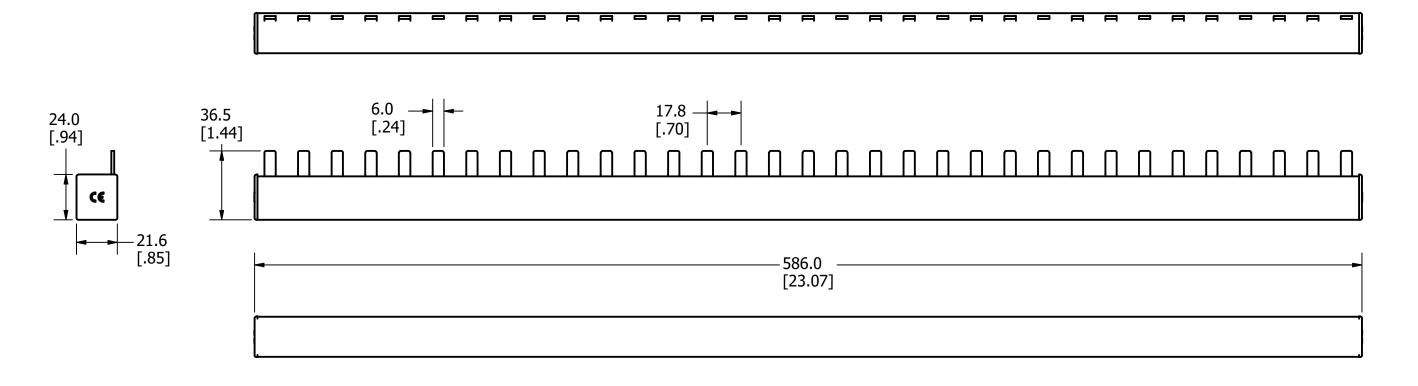

1	COMPONE	UT NO		DECCRIPTION	DNI.	QTY/M	U/M			
NO	COMPONE	VIINO		DESCRIPTION						
<s> CRI</s>			TICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE							
•		DENOTES CRITICAL CHARACTERISTICS.								
СРК		DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE								
<	ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.								
	CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.									
MATL	SPEC			FINIS	FINISH					
DRW JMOLER			DATE 8/22/2022		Ξ	FINISH GOOD WT GRAMS/PIECE				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994										
	ANGLE DJECTION									
TITLE 3PH33P18MM OUTLINE										
	4 Lit	tel	fuse [®]	REVISION	DRWG NO.	SHEET	Γ 1 OF 1			
CHICAGO, ILLINOIS 60631				Α	OL-3PH	33P18MM				