


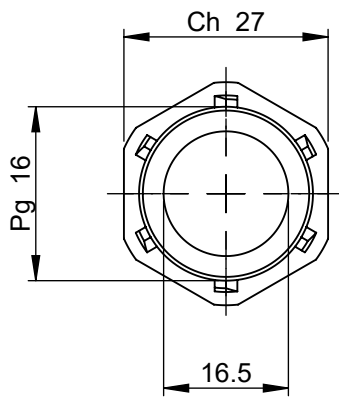


4		3		2		1	
				REVISIONS			
REV.	DESCRIPTION			DATE	DESIGNED	APPROVED	
A	First issue of outline drawing			09/10/2019	Dal Molin	Tinto	

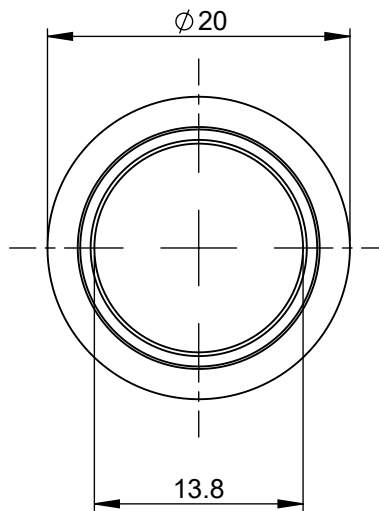

REFERENCE 1

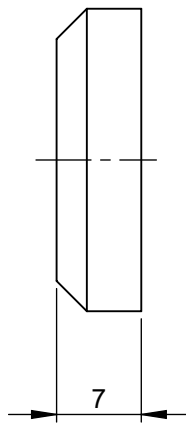

REFERENCE 2

2	Seal	/	Rubber CR
1	Nut Pg 16	/	Polyamide 6-15% GF
REF.	DESIGNATION	Q.TY	MATERIAL

SAP drawing number

DIMENSIONS AND TOLERANCES IN MILLIMETERS, DEFINED ACCORDING TO ISO 1101-2017.			
●	FIT/ FUNCTION CRITICAL CHARACTERISTICS SYMBOL		
<S>	SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL		
CPK	DENOTES CPK DIMENSIONS MINIMUM CPK VALUE		
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE.PROCEDURE FOR MEASUREMENTAND TRACKINGTO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS		
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE		
TOLERANCES UNLESS OTHERWISE SPECIFIED ONE PLACE DECIMAL ± 0.5      THREE PLACES DECIMAL ± 0.100 TWO PLACES DECIMAL ± 0.20      ANGULAR ± 2°			
NAME	DATE	 <b>Littelfuse</b> Expertise Applied   Answers Delivered	
DRAWN	L. Dal Molin 10/9/2019		
CHECKED	- -		
	- -		
FORM NO: CVP-PE40-0014 REV A		TITLE	
FIRST ANGLE PROJECTION		NUT AND SEAL FOR Ø16	
		CORRUGATED TUBE	
		SIZE: A4 DWG. NO. OL-00601100 REV. A	
DO NOT SCALE DRAWING		SCALE 1:1 SHEET 1 OF 1	

THIS DRAWING AND THE INFORMATION CONTAINED WITHIN IT ARE CONFIDENTIAL AND MAY NOT BE COPIED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF LITTELFUSE.