


| REVISION |         |                         |
|----------|---------|-------------------------|
| REV      | DATE    | DESCRIPTION             |
| A        | 6/15/21 | 523808GCP - RELEASE MRY |

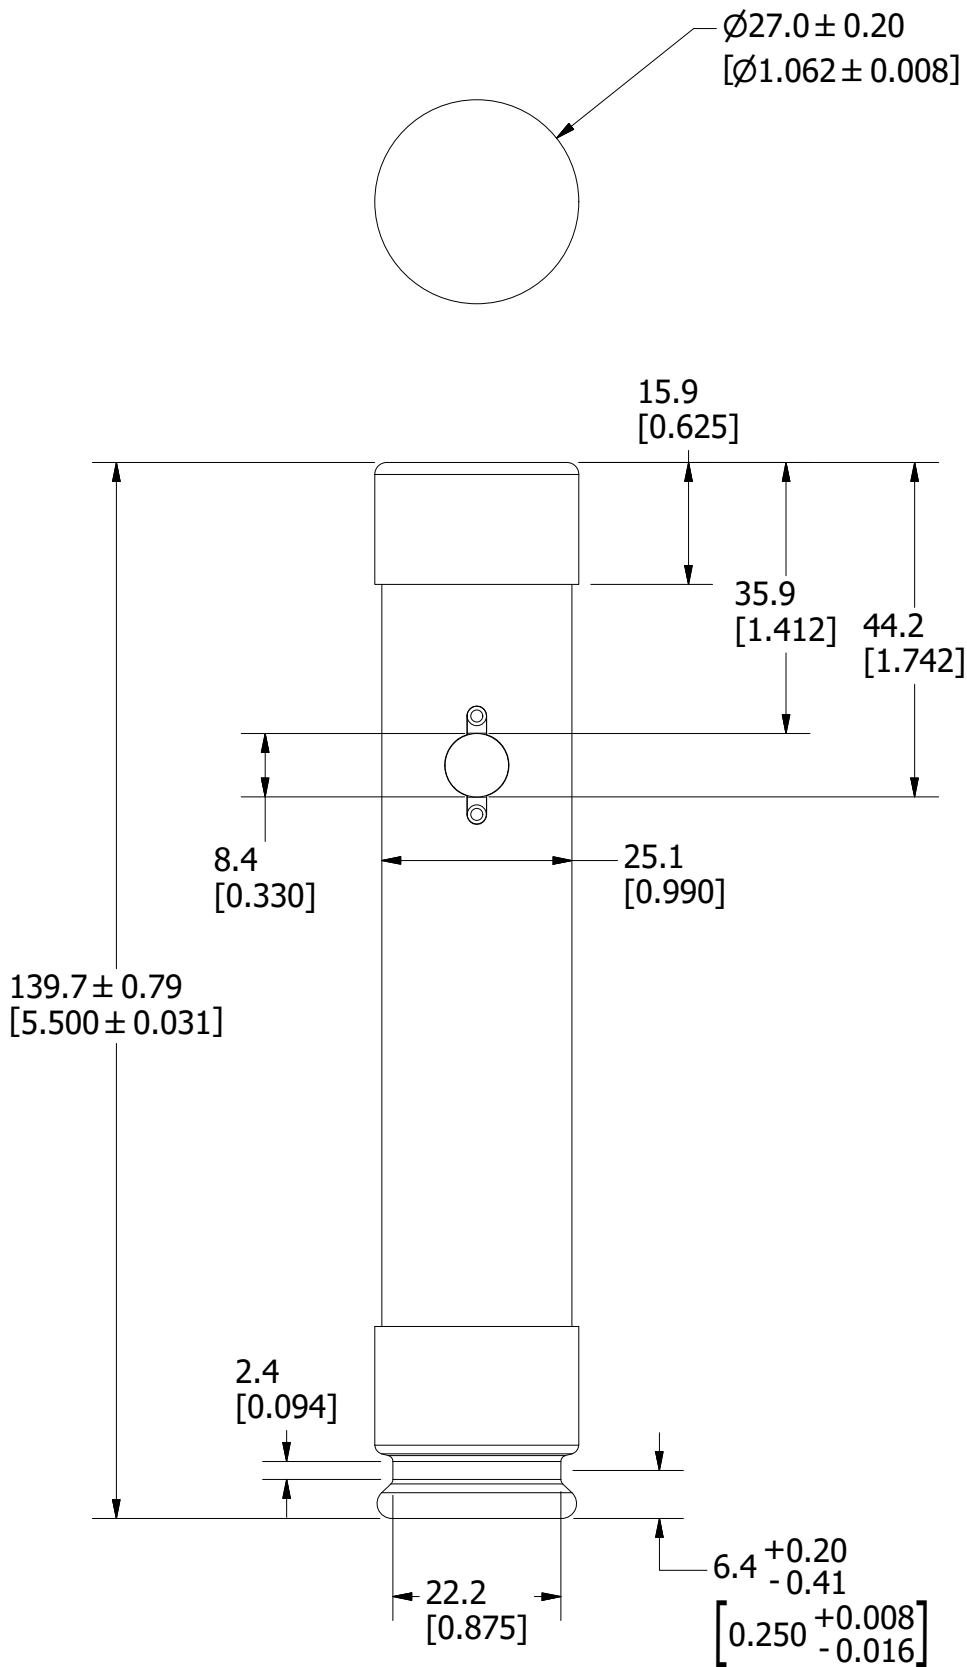

APPROXIMATE SHIPPING WEIGHT: 10 FUSES = 3.27 LB

|   |  |               |  |
|---|--|---------------|--|
| <S>   | CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE   |               |  |
| ●   | DENOTES CRITICAL CHARACTERISTICS.  |               |  |
| CPK   | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE   |               |  |
| ST  | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |               |  |
| CP  | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.               |               | B                                      |
| MATL SPEC   |  | FINISH        |  |
| DRW myork   | DATE 6/7/2021  | SCALE NTS     | FINISH GOOD WT GRAMS/PIECE             |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 |  |               |  |
| 3RD ANGLE PROJECTION  |  |               |  |
| TITLE   | IDSR 35-60A OUTLINE  |               |  |
| Littelfuse <sup>®</sup><br>CHICAGO, ILLINOIS 60631  |  | REVISION<br>A | DRWG NO.<br>OL-IDSR060<br>SHEET 1 OF 1 |