


BATTERY STUDS

POWER DISTRIBUTION ACCESSORIES



46210-10

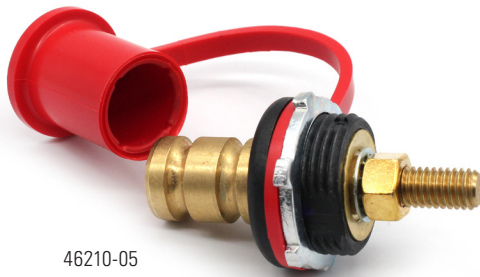

46210-05

Description

Use to make easily-accessible battery connections, inside or outside the vehicle. They can be used individually or in pairs and are easy to install. Jumper terminals have contact post 13/16" (20.6mm) diameter, 1 1/8" (28.8mm) long, which is grooved to accept standard jumper cables 6 -48V DC.

Features and Benefits

- Color-coordinated to serve as easy-to-identify power points
- Easy to install for quick distribution of power
- Brass core ensures high conductivity
- Impact-resistant plastic bodies

Ordering Information

Ordering Information can be found on Page 2.

Specifications

Insulator Material:	Plastic PBT
Operating Temp Range:	-40°C TO 105°C
Max Continuous Current:	285
Max Continuous Voltage:	36V
Mounting Torque:	10.8-13.5 Nm
Stud Material:	Brass
Washer Material:	Brass

Applications

- Provide heavy-duty ground or power points of connections in vehicle circuits
- Bring power through bulkheads or other barriers between power and access points

Web Resources

Download 2D print, installation guide and technical resources at: littelfuse.com/Batterystuds

BATTERY STUDS

POWER DISTRIBUTION ACCESSORIES

Ordering Information

PART NUMBERS	DESCRIPTION	PACKAGING	MAXIMUM CURRENT	BODY BY COLOR	STUD THREAD SIZE	CAP TYPE	Flat Washer Material	Split Lockwasher Material	Lockwasher Material
46210	Battery Jumper Stud, Positive	Bulk	6-36 VDC 285 AMPS	Red	3/8 - 16	No Cap	No Flat Washer	No Split Lockwasher	No Lockwasher
46210-01	Battery Jumper Stud, Positive	Bulk	6-36 VDC 285 AMPS	Red	3/8 - 16	Red Cap	No Flat Washer	No Split Lockwasher	No Lockwasher
46210-02	Battery Jumper Stud, Positive	Bulk	6-36 VDC 285 AMPS	Red	3/8 - 16	Red Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
46210-02-BX	Battery Jumper Stud, Positive, Boxed	Box	6-36 VDC 285 AMPS	Red	3/8 - 16	Red Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
46210-03	Battery Jumper Stud, Negative	Bulk	6-36 VDC 285 AMPS	Black	3/8 - 16	Black Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
46210-03-BX	Battery Jumper Stud, Negative, Boxed	Box	6-36 VDC 285 AMPS	Black	3/8 - 16	Black Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
46210-04	Battery Jumper Stud, Negative	Bulk	6-36 VDC 285 AMPS	Black	3/8 - 16	Black Cap	No Flat Washer	No Split Lockwasher	No Lockwasher
46210-05	Battery Jumper Stud, Positive	Bulk	6-36 VDC 285 AMPS	Red	3/8 - 16	Red Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
46210-08	Battery Jumper Stud, Negative	Bulk	6-36 VDC 285 AMPS	Black	3/8 - 16	Black Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
46210-09	Battery Jumper Stud, Positive	Bulk	6-36 VDC 285 AMPS	Red	3/8 - 16	Red Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
46210-10	Battery Jumper Stud, Negative	Bulk	6-36 VDC 285 AMPS	Black	3/8 - 16	Black Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
46211-01	Feed Thru Stud, Negative	Bulk	6-36 VDC 260 AMPS	Black	3/8 - 16	No Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
46211-01-BX	Feed Thru Stud, Negative, Boxed	Box	6-36 VDC 260 AMPS	Black	3/8 - 16	No Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
46211-02	Feed Thru Stud, Negative	Bulk	6-36 VDC 250 AMPS	Black	1/2 - 20	No Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
46211-03	Feed Thru Stud, Negative	Bulk	6-36 VDC 250 AMPS	Black	1/2 - 20	No Cap	Brass	Zinc Plated Steel	No Lockwasher
46211-04	Feed Thru Stud, Negative	Bulk	6-36 VDC 260 AMPS	Black	3/8 - 16	No Cap	No Flat Washer	No Split Lockwasher	Bronze
46211-06	Feed Thru Stud, Negative	Bulk	6-36 VDC 260 AMPS	Black	3/8 - 16	No Cap	No Flat Washer	No Split Lockwasher	No Lockwasher
46211-11	Feed Thru Stud, Negative	Bulk	6-36 VDC 260 AMPS	Black	3/8 - 16	No Cap	No Flat Washer	No Split Lockwasher	No Lockwasher
46211-12	Feed Thru Stud, Negative	Bulk	6-36 VDC 260 AMPS	Black	M10 X 1.5	No Cap	No Flat Washer	No Split Lockwasher	No Lockwasher
46211-13	Feed Thru Stud, Positive	Bulk	6-36 VDC 260 AMPS	Red	M10 X 1.5	No Cap	No Flat Washer	No Split Lockwasher	No Lockwasher
46211-14	Feed Thru Stud, Negative	Bulk	6-36 VDC 260 AMPS	Black	3/8 - 16	No Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
46211-R	Feed Thru Stud, Positive	Bulk	6-36 VDC 260 AMPS	Red	3/8 - 16	No Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
46211-R-BX	Feed Thru Stud, Positive, Boxed	Box	6-36 VDC 260 AMPS	Red	3/8 - 16	No Cap	No Flat Washer	No Split Lockwasher	Zinc Plated Steel
97846-A	Replacement Cap, Positive	Bulk	-	Red	-	-	-	-	-
97846-A-BX	Replacement Cap, Positive, Boxed	Box	-	Red	-	-	-	-	-
97846-B	Replacement Cap, Negative	Bulk	-	Black	-	-	-	-	-
97846-B-BX	Replacement Cap, Negative, Boxed	Box	-	Black	-	-	-	-	-