


# High Voltage IGBT For Capacitor Discharge Applications

## IXGF20N250


$V_{CES} = 2500V$   
 $I_{C25} = 23A$   
 $V_{CE(sat)} \leq 3.1V$

( Electrically Isolated Tab )



Symbol	Test Conditions	Maximum Ratings	
$V_{CES}$	$T_J = 25^\circ C$ to $150^\circ C$	2500	V
$V_{CGR}$	$T_J = 25^\circ C$ to $150^\circ C$ , $R_{GE} = 1M\Omega$	2500	V
$V_{GES}$	Continuous	$\pm 20$	V
$V_{GEM}$	Transient	$\pm 30$	V
$I_{C25}$	$T_C = 25^\circ C$	23	A
$I_{C90}$	$T_C = 90^\circ C$	14	A
$I_{CM}$	$T_C = 25^\circ C$ , $V_{GE} = 19V$ , 1ms	105	A
		10ms	55
<b>SSOA</b>	$V_{GE} = 15V$ , $T_{VJ} = 125^\circ C$ , $R_G = 20\Omega$	$I_{CM} = 60$	A
<b>(RBSOA)</b>	Clamped Inductive Load	1500	V
$P_c$	$T_C = 25^\circ C$	100	W
$T_J$		-55 ... +150	$^\circ C$
$T_{JM}$		150	$^\circ C$
$T_{stg}$		-55 ... +150	$^\circ C$
$T_L$	1.6 mm (0.062 in.) from Case for 10s	300	$^\circ C$
$T_{SOLD}$	Plastic Body for 10s	260	$^\circ C$
$F_c$	Mounting Force	20..120 / 4.5..27	Nm/lb.in.
$V_{ISOL}$	50/60Hz, 1 Minute	4000	V~
<b>Weight</b>		6	g

### ISOPLUS i4-Pak™



1 = Gate  
 2 = Emitter  
 5 = Collector

### Features

- Silicon Chip on Direct-Copper Bond (DCB) Substrate
- Isolated Mounting Surface
- 4000V~ Electrical Isolation
- High Peak Current Capability
- Low Saturation Voltage
- Molding Epoxies Meet UL 94 V-0 Flammability Classification

### Applications


- Capacitor Discharge
- Pulser Circuits

### Advantages

- High Power Density
- Easy to Mount

Symbol	Test Conditions ( $T_J = 25^\circ C$ , Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
$BV_{CES}$	$I_C = 250\mu A$ , $V_{GE} = 0V$	2500		V
$V_{GE(th)}$	$I_C = 250\mu A$ , $V_{CE} = V_{GE}$	3.0		V
$I_{CES}$	$V_{CE} = 0.8 \cdot V_{CES}$ , $V_{GE} = 0V$ Note 2, $T_J = 125^\circ C$			10 $\mu A$ 750 $\mu A$
$I_{GES}$	$V_{CE} = 0V$ , $V_{GE} = \pm 20V$			$\pm 100$ nA
$V_{CE(sat)}$	$I_C = 20A$ , $V_{GE} = 15V$ , Note 1			3.1 V

Symbol	Test Conditions ( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
$g_{fs}$	$I_C = 20\text{A}$ , $V_{CE} = 10\text{V}$ , Note 1	8	13	S
$I_{C(ON)}$	$V_{GE} = 20\text{V}$ , $V_{CE} = 15\text{V}$ , Note 1		190	A
$C_{ies}$	$V_{CE} = 15\text{V}$ , $V_{GE} = 25\text{V}$ , $f = 1\text{MHz}$		1190	pF
$C_{oes}$			53	pF
$C_{res}$			18	pF
$Q_g$	$I_C = 20\text{A}$ , $V_{GE} = 15\text{V}$ , $V_{CE} = 1000\text{V}$		53	nC
$Q_{ge}$			8	nC
$Q_{gc}$			22	nC
$t_{d(on)}$	<b>Resistive Switching Times</b> $I_C = 40\text{A}$ , $V_{GE} = 15\text{V}$ $V_{CE} = 1250\text{V}$ , $R_G = 10\Omega$		57	ns
$t_r$			160	ns
$t_{d(off)}$			136	ns
$t_f$			930	ns
$R_{thJC}$			1.25	$^\circ\text{C/W}$
$R_{thCS}$		0.15		$^\circ\text{C/W}$
$R_{thJA}$		30		$^\circ\text{C/W}$

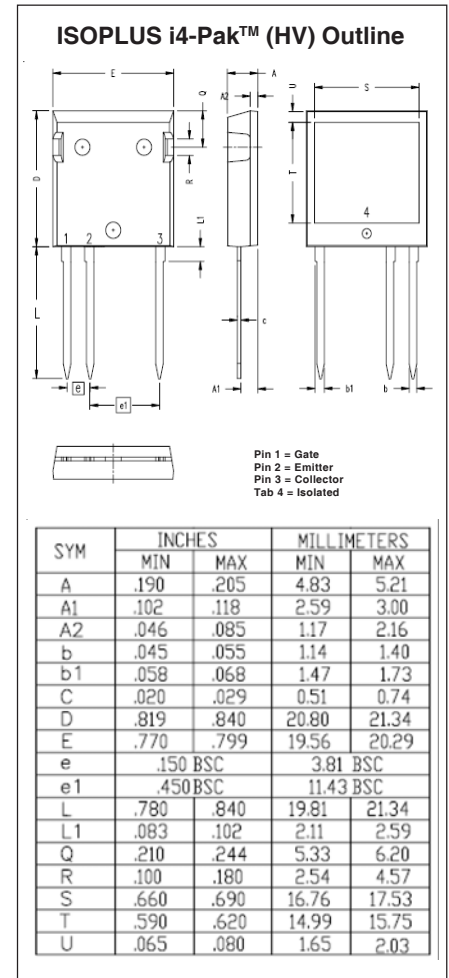


**Notes:**

1. Pulse test,  $t \leq 300\mu\text{s}$ , duty cycle,  $d \leq 2\%$ .
2. Device must be heatsunk for high temperature leakage current measurements to avoid thermal runaway.


IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:	4,835,592	4,931,844	5,049,961	5,237,481	6,162,665	6,404,065 B1	6,683,344	6,727,585	7,005,734 B2	7,157,338B2
	4,860,072	5,017,508	5,063,307	5,381,025	6,259,123 B1	6,534,343	6,710,405 B2	6,759,692	7,063,975 B2	
	4,881,106	5,034,796	5,187,117	5,486,715	6,306,728 B1	6,583,505	6,710,463	6,771,478 B2	7,071,537	


**Fig. 1. Output Characteristics @  $T_J = 25^\circ\text{C}$**

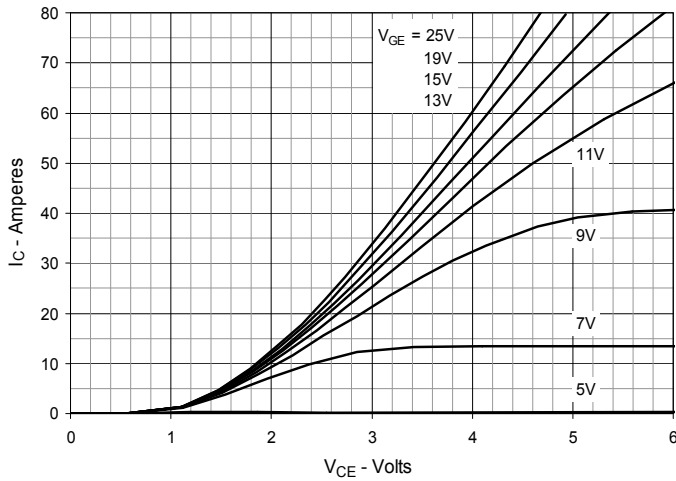


**Fig. 2. Extended Output Characteristics @  $T_J = 25^\circ\text{C}$**

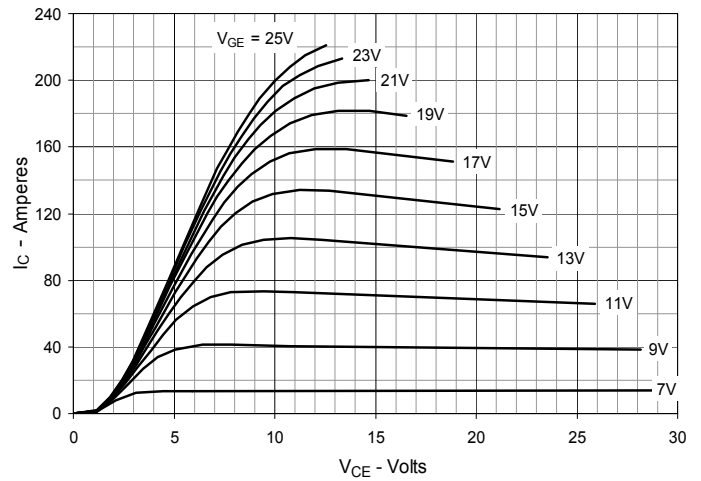


**Fig. 3. Output Characteristics @  $T_J = 125^\circ\text{C}$**

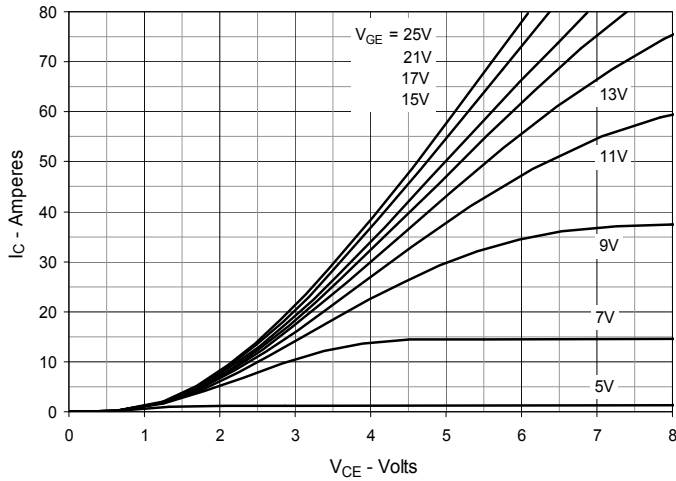


**Fig. 4. Dependence of  $V_{CE(sat)}$  on Junction Temperature**

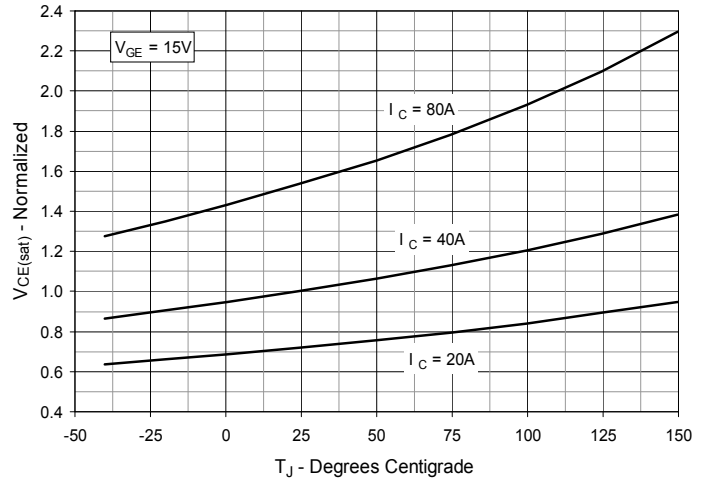


**Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage**

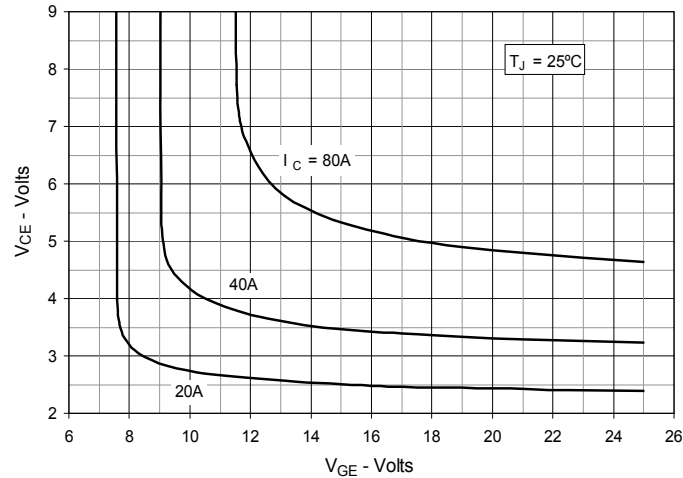


**Fig. 6. Input Admittance**

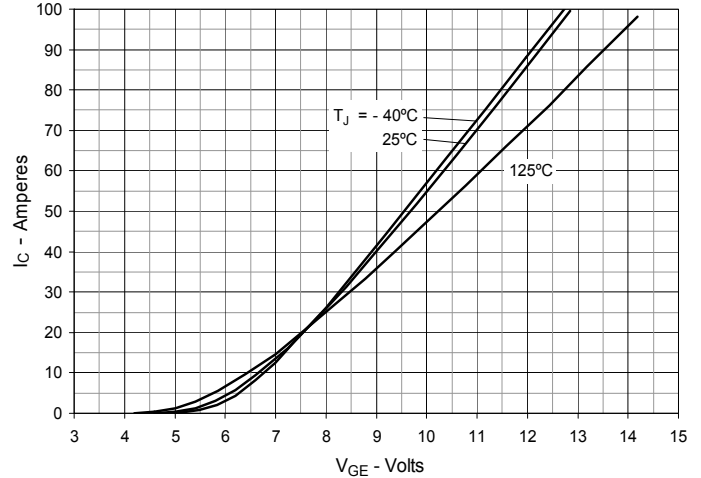


**Fig. 7. Transconductance**

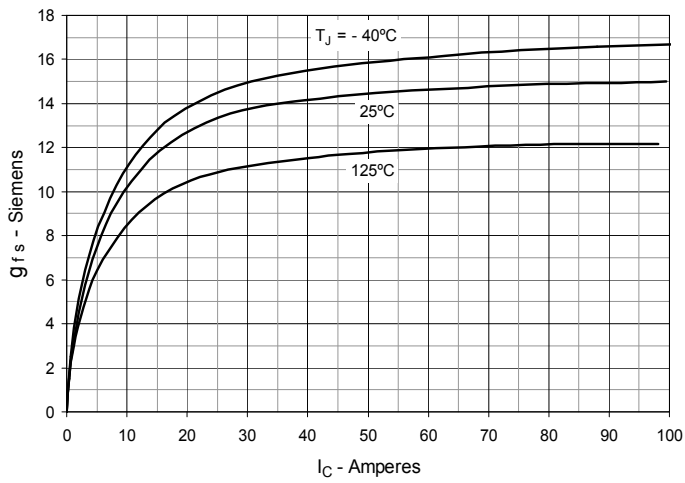


**Fig. 8. Gate Charge**

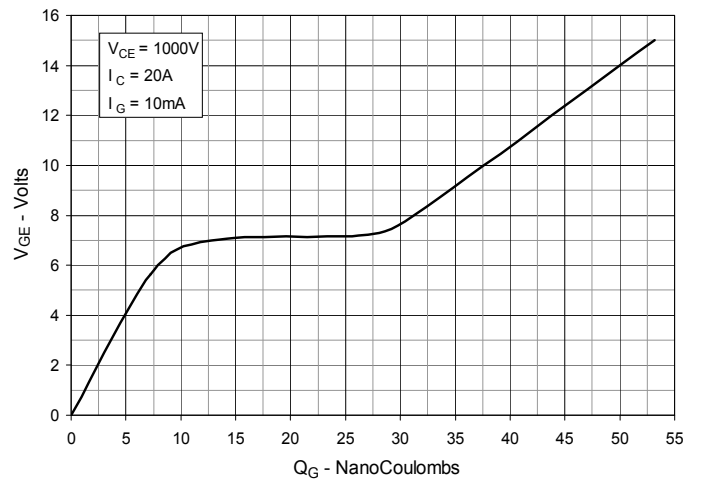


**Fig. 9. Reverse-Bias Safe Operating Area**

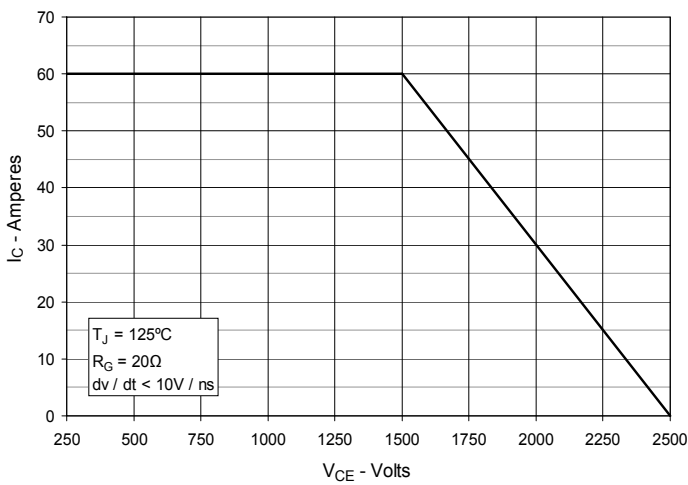


**Fig. 10. Capacitance**

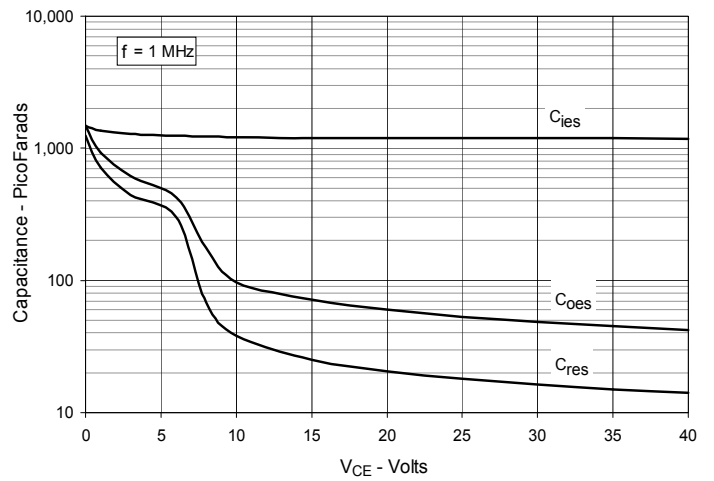


**Fig. 11. Maximum Transient Thermal Impedance**

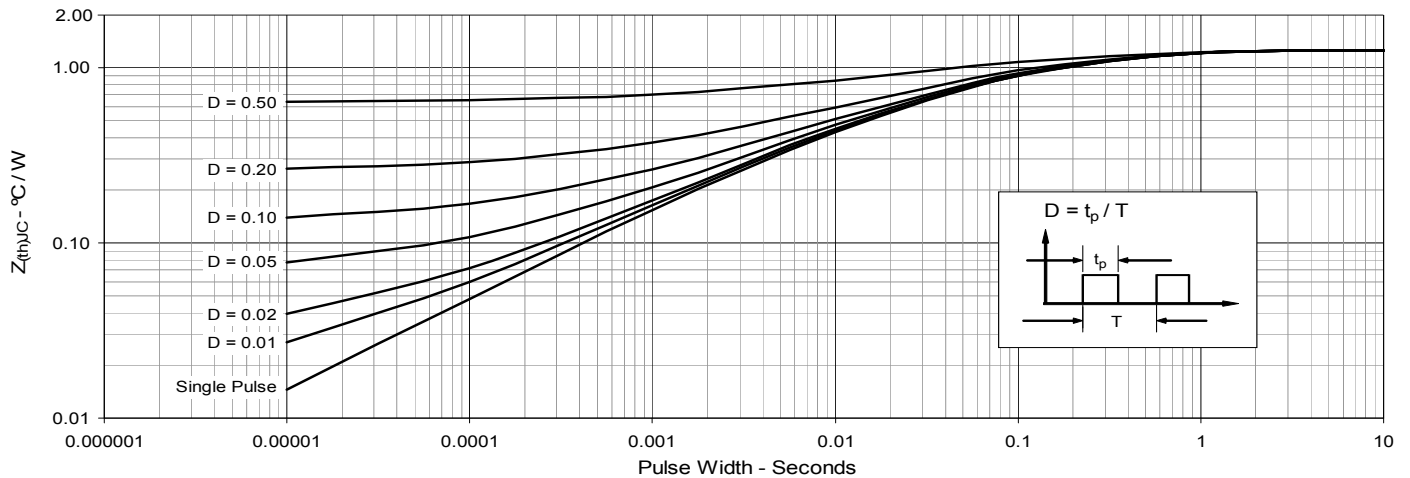


**Fig. 12. Resistive Turn-on Rise Time vs. Junction Temperature**

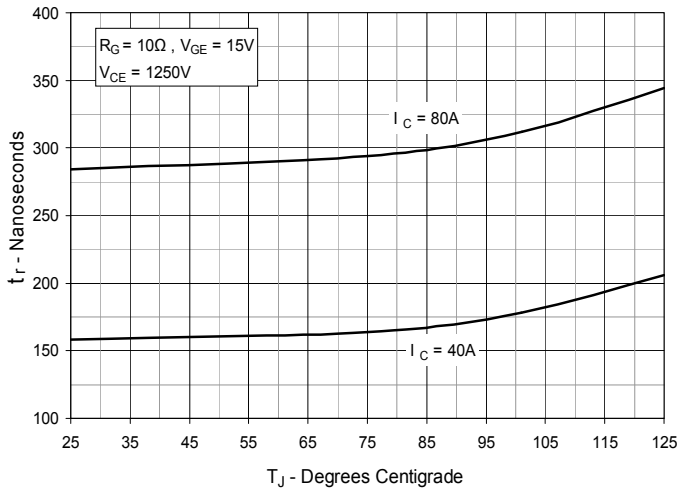


**Fig. 13. Resistive Turn-on Rise Time vs. Collector Current**

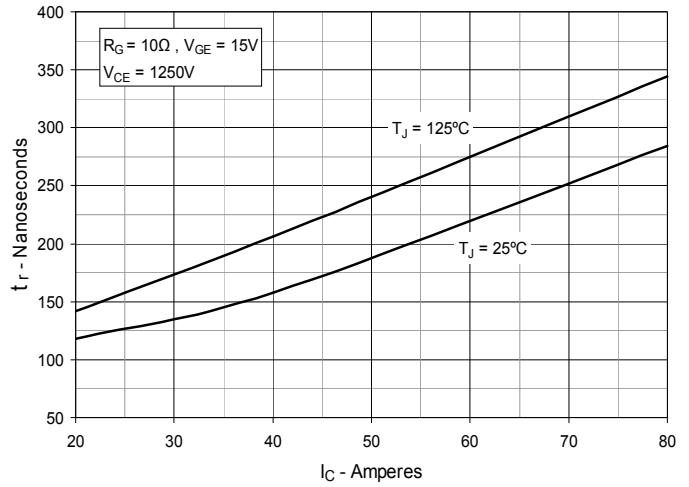


**Fig. 14. Resistive Turn-on Switching Times vs. Gate Resistance**

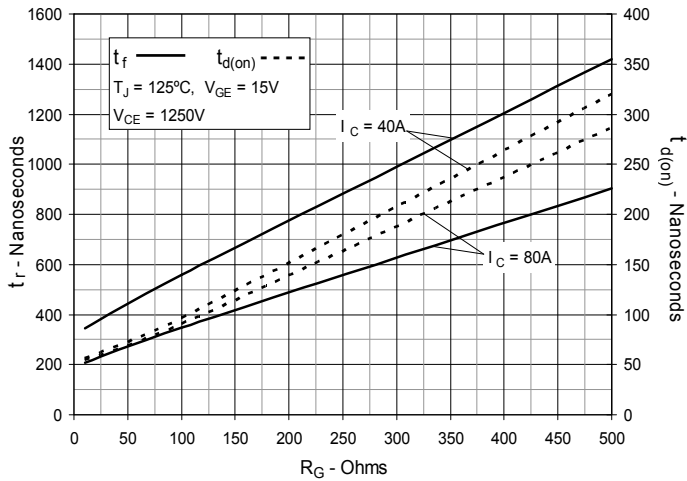


**Fig. 15. Resistive Turn-off Switching Times vs. Junction Temperature**

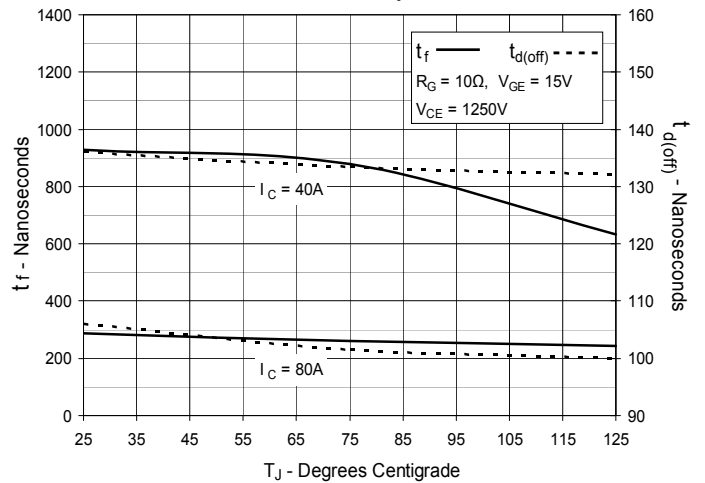

**Fig. 16. Resistive Turn-off Switching Times vs. Collector Current**

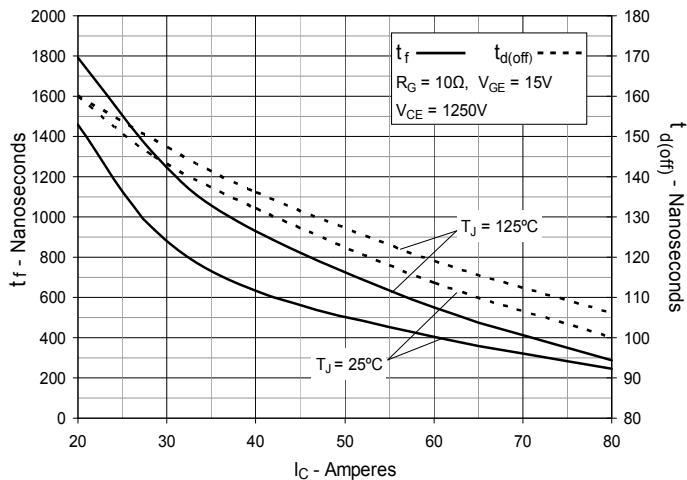

**Fig. 17. Resistive Turn-off Switching Times vs. Gate Resistance**

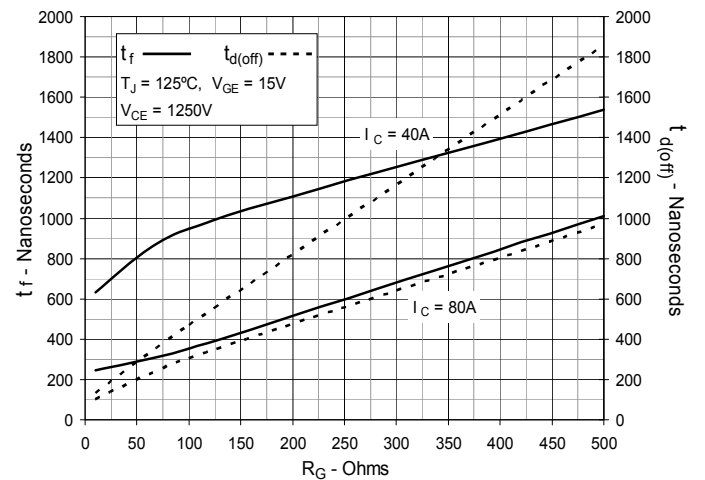



---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).