



# CoolMOS™ 1) Power MOSFET

N-Channel Enhancement Mode  
Low  $R_{DS(on)}$ , High  $V_{DSS}$  MOSFET

$V_{DSS} = 600\text{ V}$   
 $I_{D25} = 75\text{ A}$   
 $R_{DS(on)\text{ max}} = 36\text{ m}\Omega$



miniBLOC, SOT-227 B



G = Gate    D = Drain    S = Source

Either source terminal at miniBLOC can be used as main or kelvin source

MOSFET			
Symbol	Conditions	Maximum Ratings	
$V_{DSS}$	$T_{VJ} = 25^{\circ}\text{C to } 150^{\circ}\text{C}$	600	V
$V_{GS}$		$\pm 20$	V
$I_{D25}$	$T_C = 25^{\circ}\text{C}$	75	A
$I_{D90}$	$T_C = 90^{\circ}\text{C}$	50	A
$I_{D\text{ puls}}$	pulse drain current, $t_p$ limited by $T_{J\text{ max}}$	250	A
$E_{AS}$	$I_D = 10\text{ A}; L = 36\text{ mH}$	$T_C = 25^{\circ}\text{C}$	1.8 J
$E_{AR}$	$I_D = 20\text{ A}; L = 5\text{ mH}$	$T_C = 25^{\circ}\text{C}$	1 mJ
$dv/dt$	$V_{DS} < V_{DSS}; I_F \leq 100\text{ A}$ $ di_F/dt  \leq 100\text{ A}/\mu\text{s}$	$T_{VJ} = 125^{\circ}\text{C}$	6 V/ns

### Features

- miniBLOC package
  - Electrically isolated copper base
  - Low coupling capacitance to the heatsink for reduced EMI
  - High power dissipation due to AlN ceramic substrate
  - International standard package SOT-227
  - Easy screw assembly
- fast CoolMOS™ 1) power MOSFET 3<sup>rd</sup> generation
  - High blocking capability
  - Low on resistance
  - Avalanche rated for unclamped inductive switching (UIS)
  - Low thermal resistance due to reduced chip thickness
- Enhanced total power density

Symbol	Conditions	Characteristic Values			
		$(T_{VJ} = 25^{\circ}\text{C}, \text{ unless otherwise specified})$			
		min.	typ.	max.	
$R_{DS(on)}$	$V_{GS} = 10\text{ V}; I_D = I_{D90}$		30	36	m $\Omega$
$V_{GS(th)}$	$V_{DS} = 20\text{ V}; I_D = 5\text{ mA}$	2.1		3.9	V
$I_{DSS}$	$V_{DS} = V_{DSS}; V_{GS} = 0\text{ V}$			50	$\mu\text{A}$
			100		$\mu\text{A}$
$I_{GSS}$	$V_{GS} = \pm 20\text{ V}; V_{DS} = 0\text{ V}$			$\pm 200$	nA
$Q_g$	$V_{GS} = 0\text{ to } 10\text{ V}; V_{DS} = 350\text{ V}; I_D = 100\text{ A}$		500		nC
$Q_{gs}$			50		nC
$Q_{gd}$			240		nC
$t_{d(on)}$	$V_{GS} = 10\text{ V}; V_{DS} = 380\text{ V}$ $I_D = 100\text{ A}; R_G = 1.0\ \Omega$		20		ns
$t_r$			30		ns
$t_{d(off)}$			110		ns
$t_f$			10		ns
$V_F$	(reverse conduction) $I_F = 37.5\text{ A}; V_{GS} = 0\text{ V}$		0.9	1.1	V
$R_{thJC}$			0.22		K/W

### Applications

- Switched mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)
- Power factor correction (PFC)
- Welding
- Inductive heating

<sup>1)</sup> CoolMOS™ is a trademark of Infineon Technologies AG.

### Source-Drain Diode

Symbol	Conditions	Characteristic Values			
		min.	typ.	max.	
$I_S$	$V_{GS} = 0\text{ V}$			85	A
$I_{SM}$				250	A
$V_{SD}$	$I_F = 85\text{ A}; V_{GS} = 0\text{ V}$			1.2	V
$t_{rr}$	$I_F = 85\text{ A}; -di_F/dt = 200\text{ A}/\mu\text{s}; V_R = 350\text{ V}$		580		ns
$Q_{RM}$			46		$\mu\text{C}$
$I_{RM}$			140		A


( $T_{VJ} = 25^\circ\text{C}$ , unless otherwise specified)

### Component

Symbol	Conditions	Maximum Ratings	
$T_{VJ}$	operating	-55...+150	$^\circ\text{C}$
$T_{stg}$		-55...+125	$^\circ\text{C}$
$M_d$	mounting torque	1.5	Nm
	terminal connection torque (M4)	1.5	Nm

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$R_{thCH}$	with heatsink compound		0.1	K/W
Weight			30	g

### miniBLOC, SOT-227 B Outline

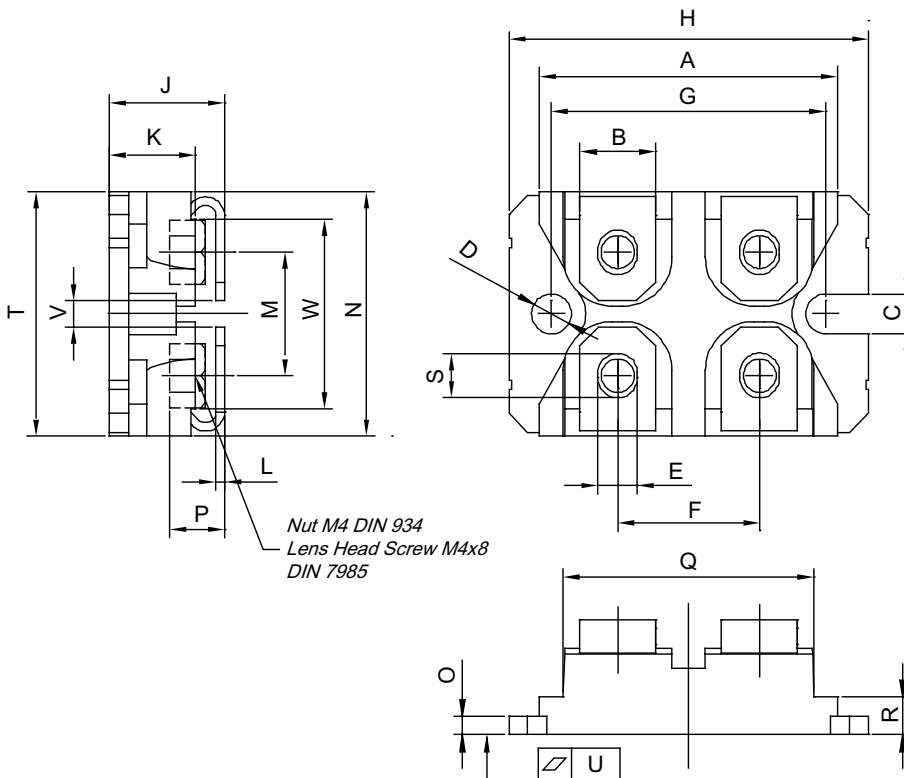

SYM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	31.50	31.88	1.240	1.255
B	7.80	8.20	.307	.323
C	4.09	4.29	.161	.169
D	4.09	4.29	.161	.169
E	4.09	4.29	.161	.169
F	14.91	15.11	.587	.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.489	1.505
J	11.68	12.22	.460	.481
K	8.92	9.60	.351	.378
L	0.76	0.84	.030	.033
M	12.60	12.85	.496	.506
N	25.15	25.42	.990	1.001
O	1.98	2.13	.078	.084
P	4.95	5.97	.195	.235
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	.155	.174
S	4.72	4.85	.186	.191
T	24.59	25.07	.968	.987
U	-.05	.10	-.002	.004
V	3.30	4.57	.130	.180
W	19.81	21.08	.780	.830

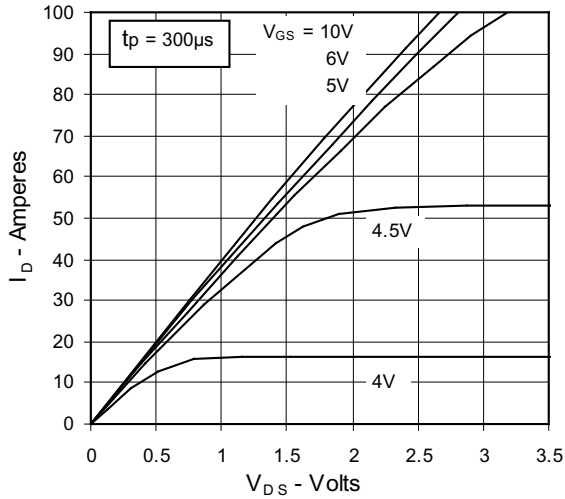


Fig. 1 Typ. output characteristics  $I_D = f(V_{DS})$

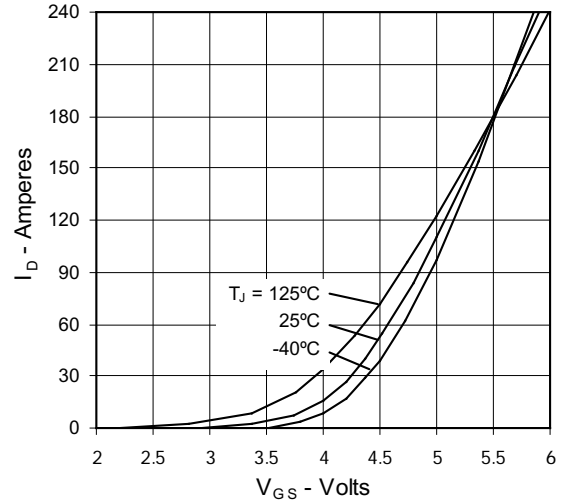


Fig. 2 Typ. transfer characteristics  $I_D = f(V_{GS})$

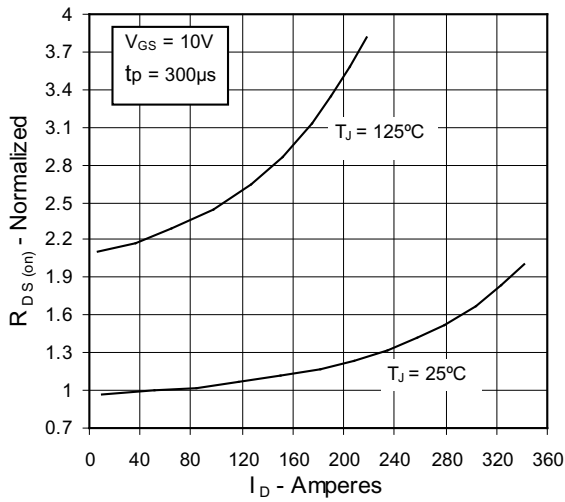


Fig. 3 Typical normalized  $R_{DS(on)} = f(I_D)$

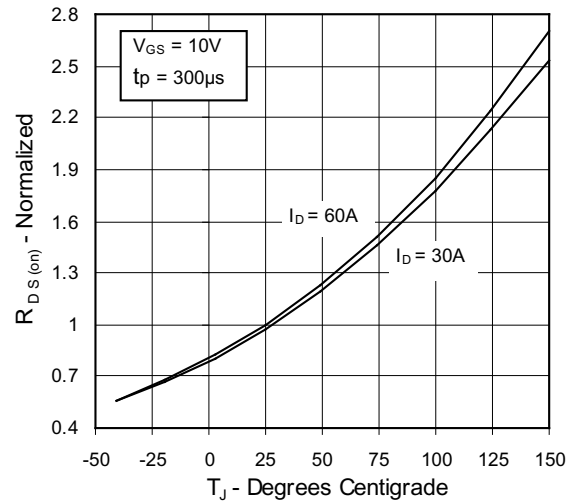


Fig. 4 Typical normalized  $R_{DS(on)} = f(T_J)$

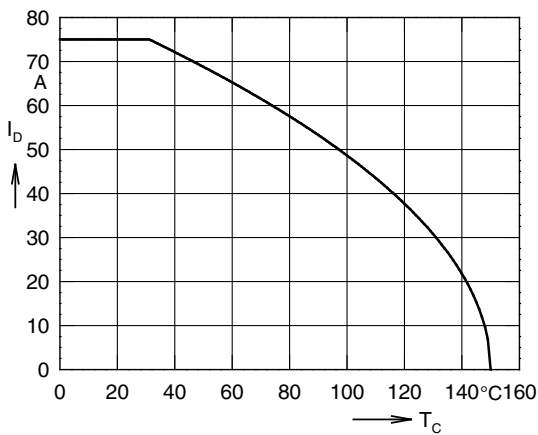


Fig. 5 Continuous drain current  $I_D = f(T_C)$

Fig. 6 Typ. normalized  $V_{DSS} = f(T_J)$ ,  $V_{GS(th)} = f(T_J)$

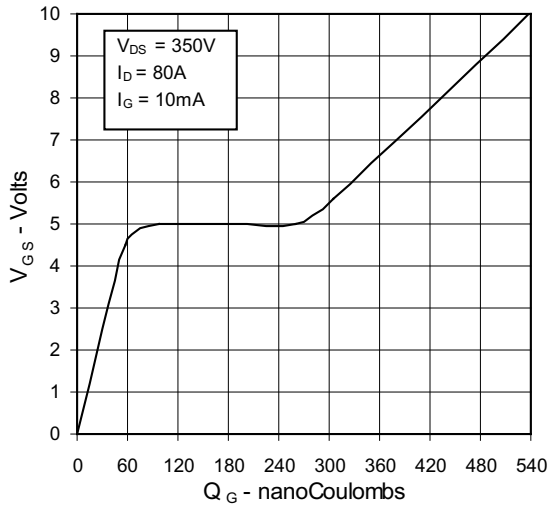


Fig. 7 Typ. turn-on gate charge characteristics

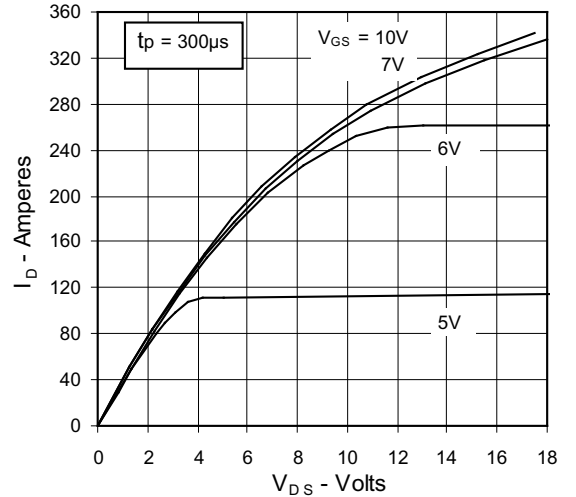


Fig. 8 Forward Safe Operating Area,  $I_D = f(V_{DS})$

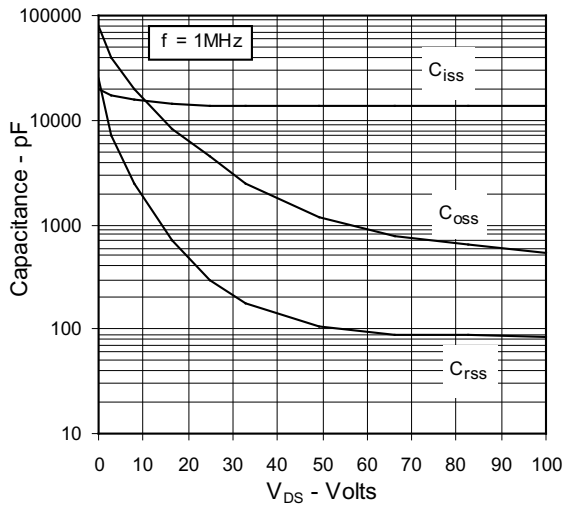


Fig. 9 Typ. capacitances  $C = f(V_{DS})$ ,  $f = 1 \text{ MHz}$

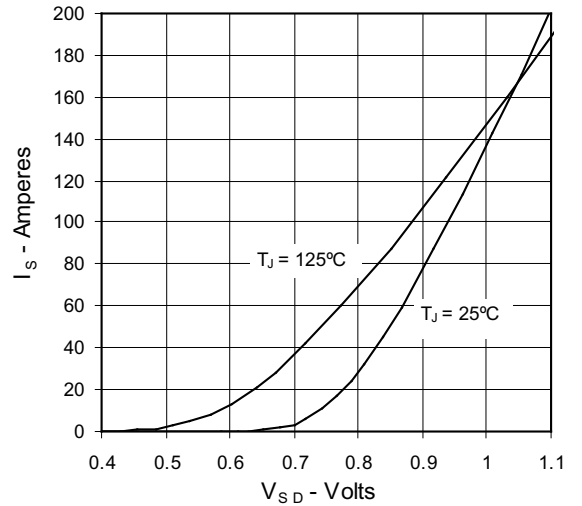


Fig. 10 Typ. forward characteristics of reverse diode,  $I_S = f(V_{SD})$

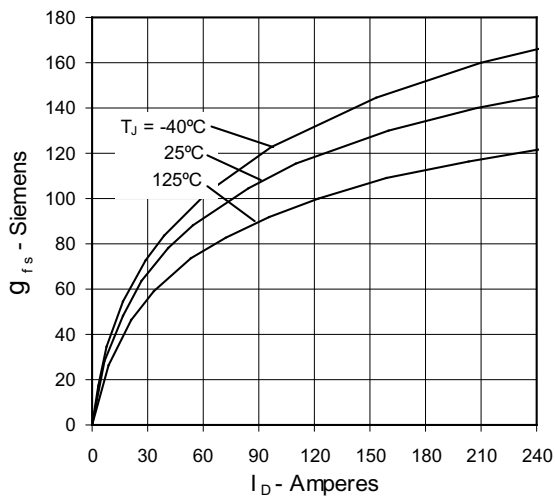


Fig. 11 Typical transconductance  $g_{fs} = f(I_D)$

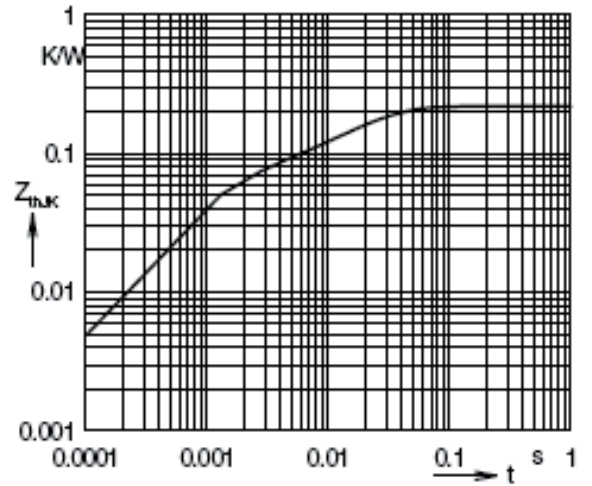


Fig. 12 Transient thermal resistance  $Z_{thJK} = f(t_p)$



---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).