
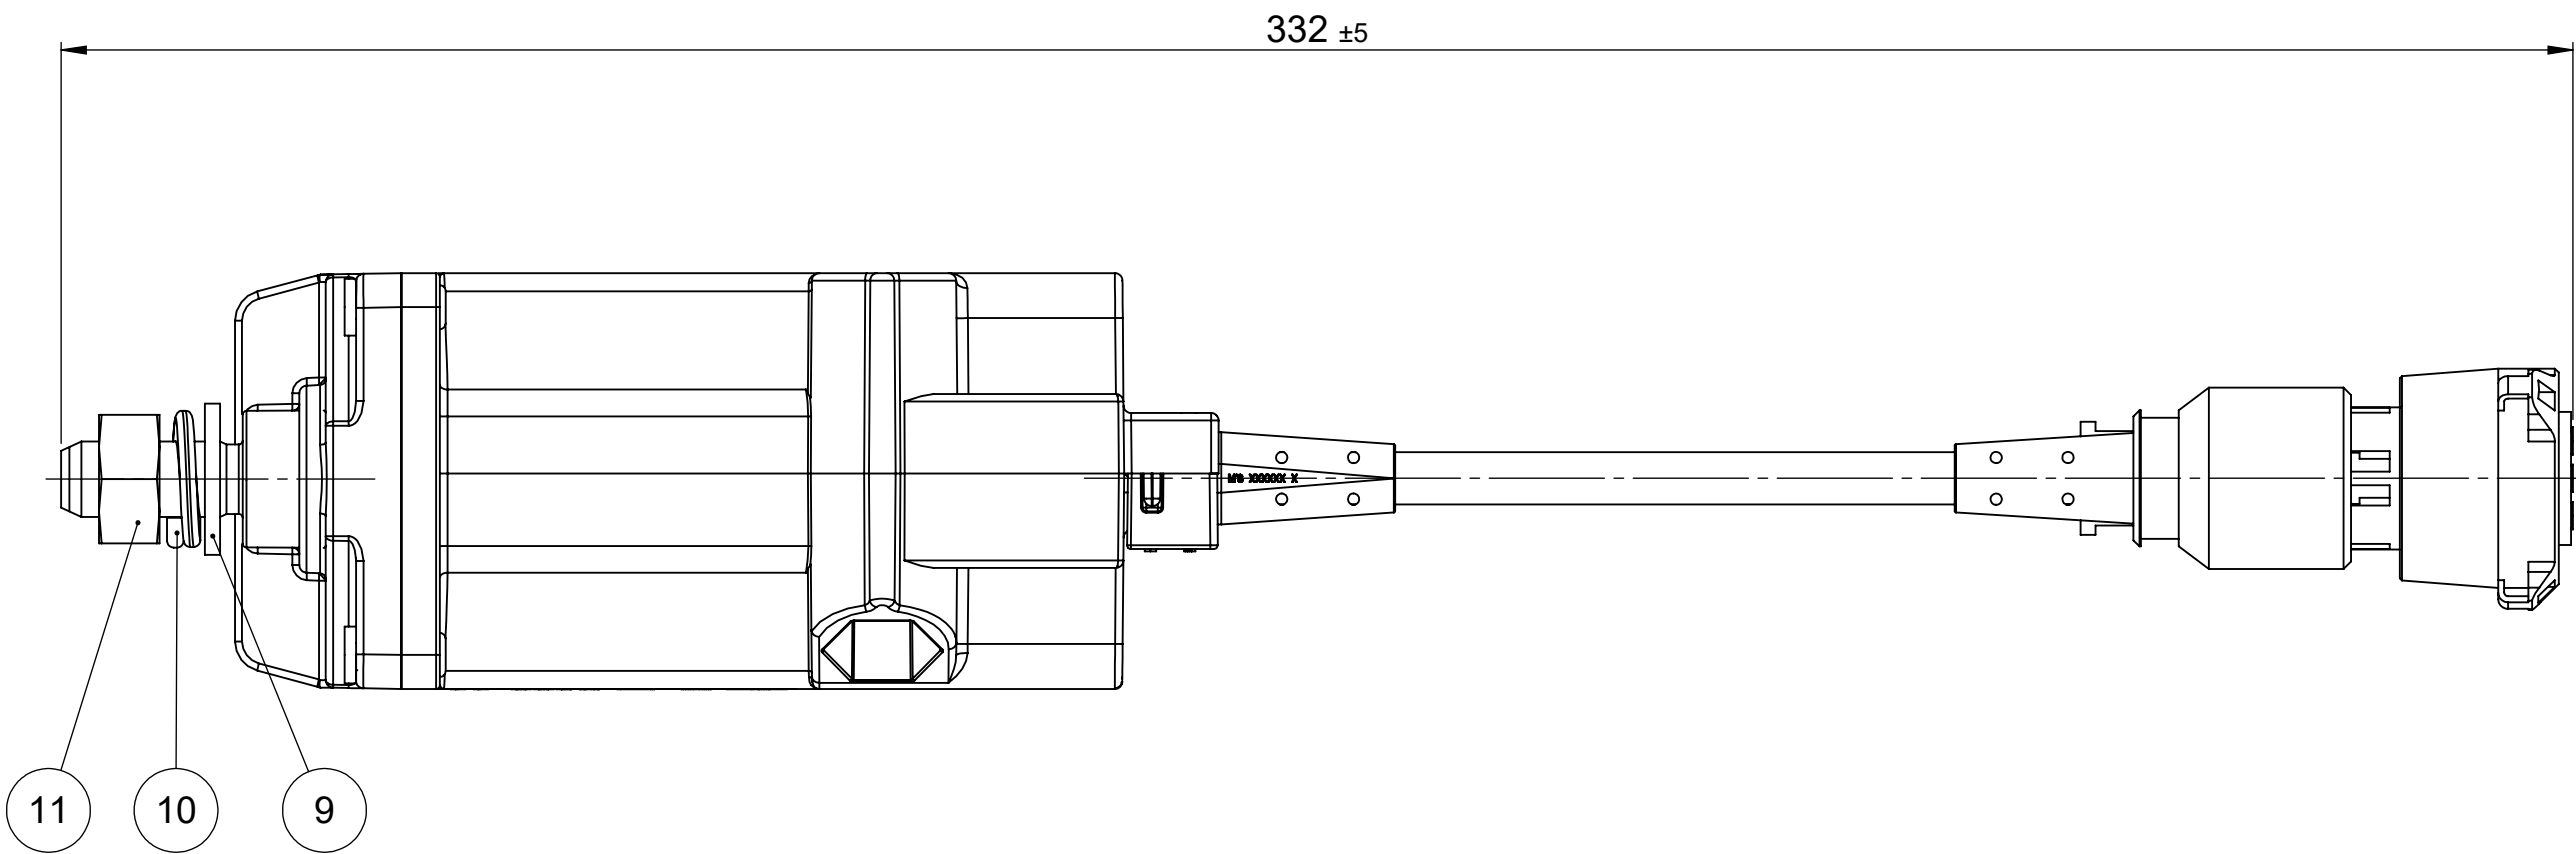
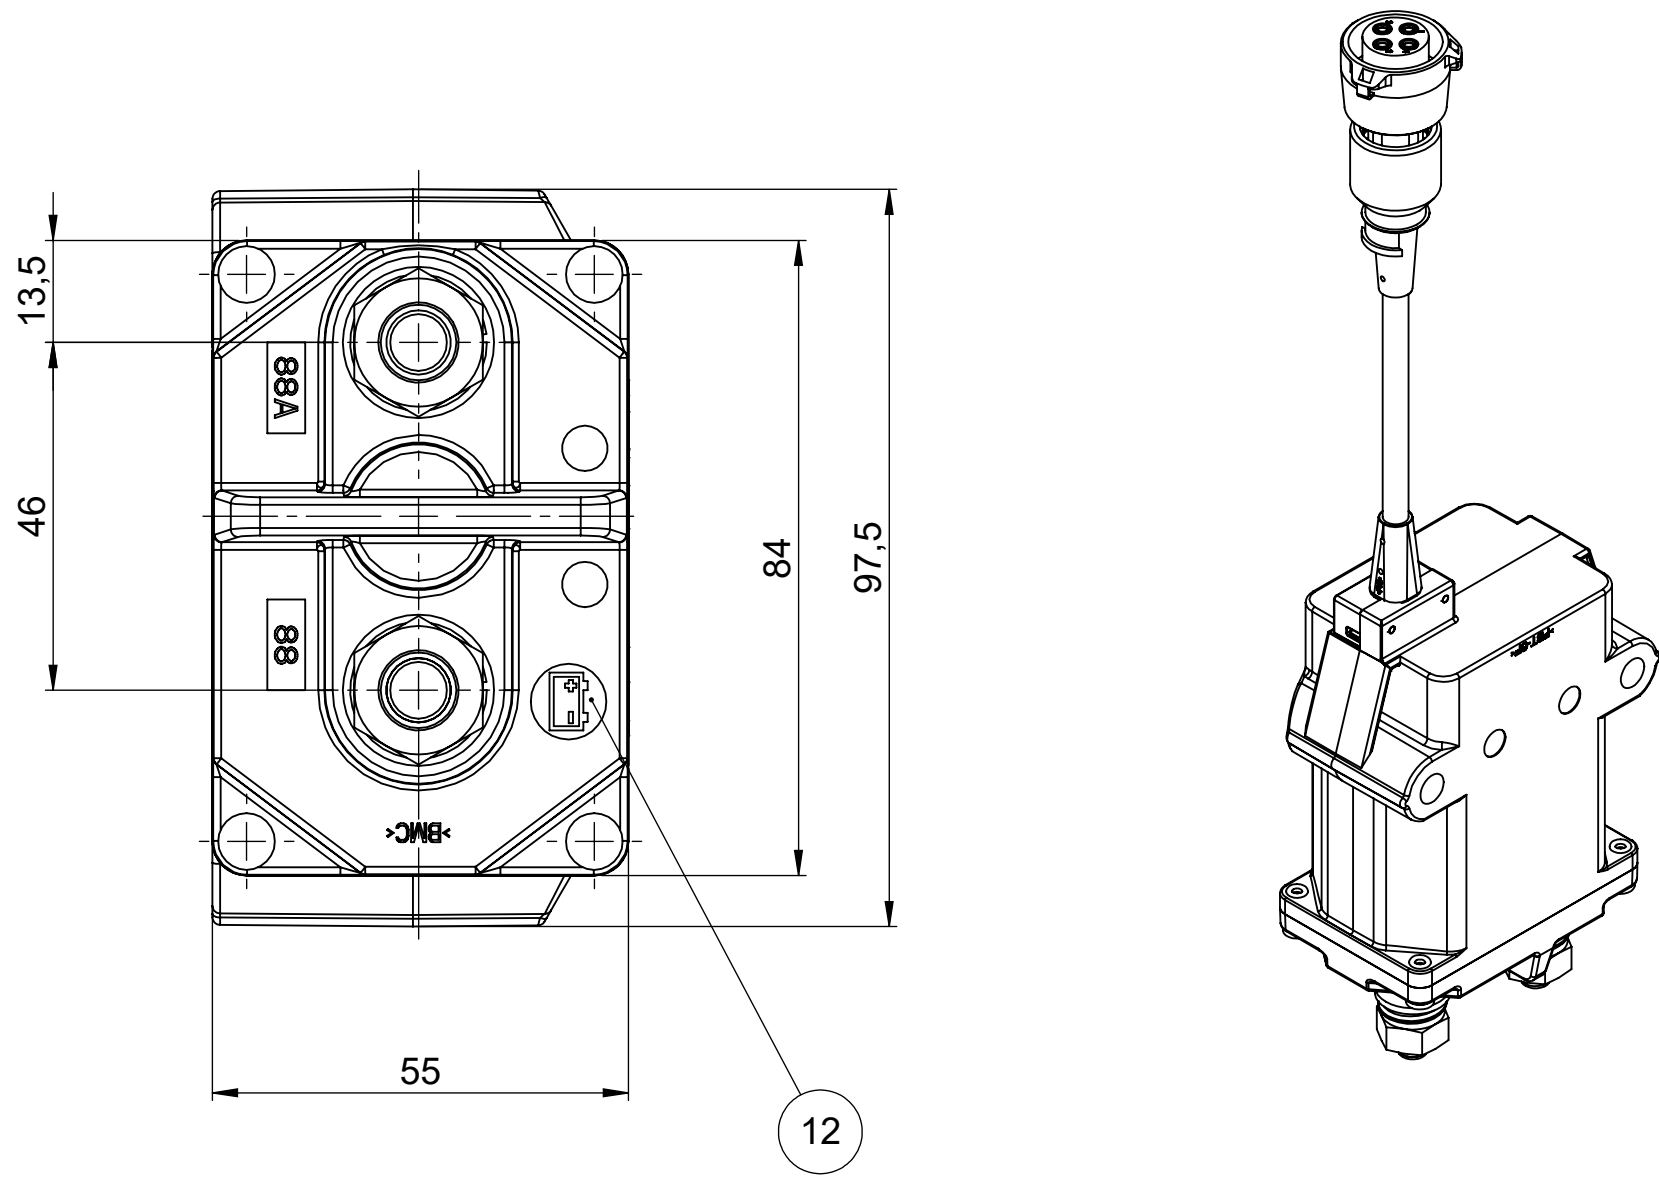


REV.	DESCRIPTION	REVISIONS		DESIGNED	APPROVED
		DATE			
A	FIRST ISSUE OF OUTLINE DRAWING	09-June-20	Gasparini	Tinto	

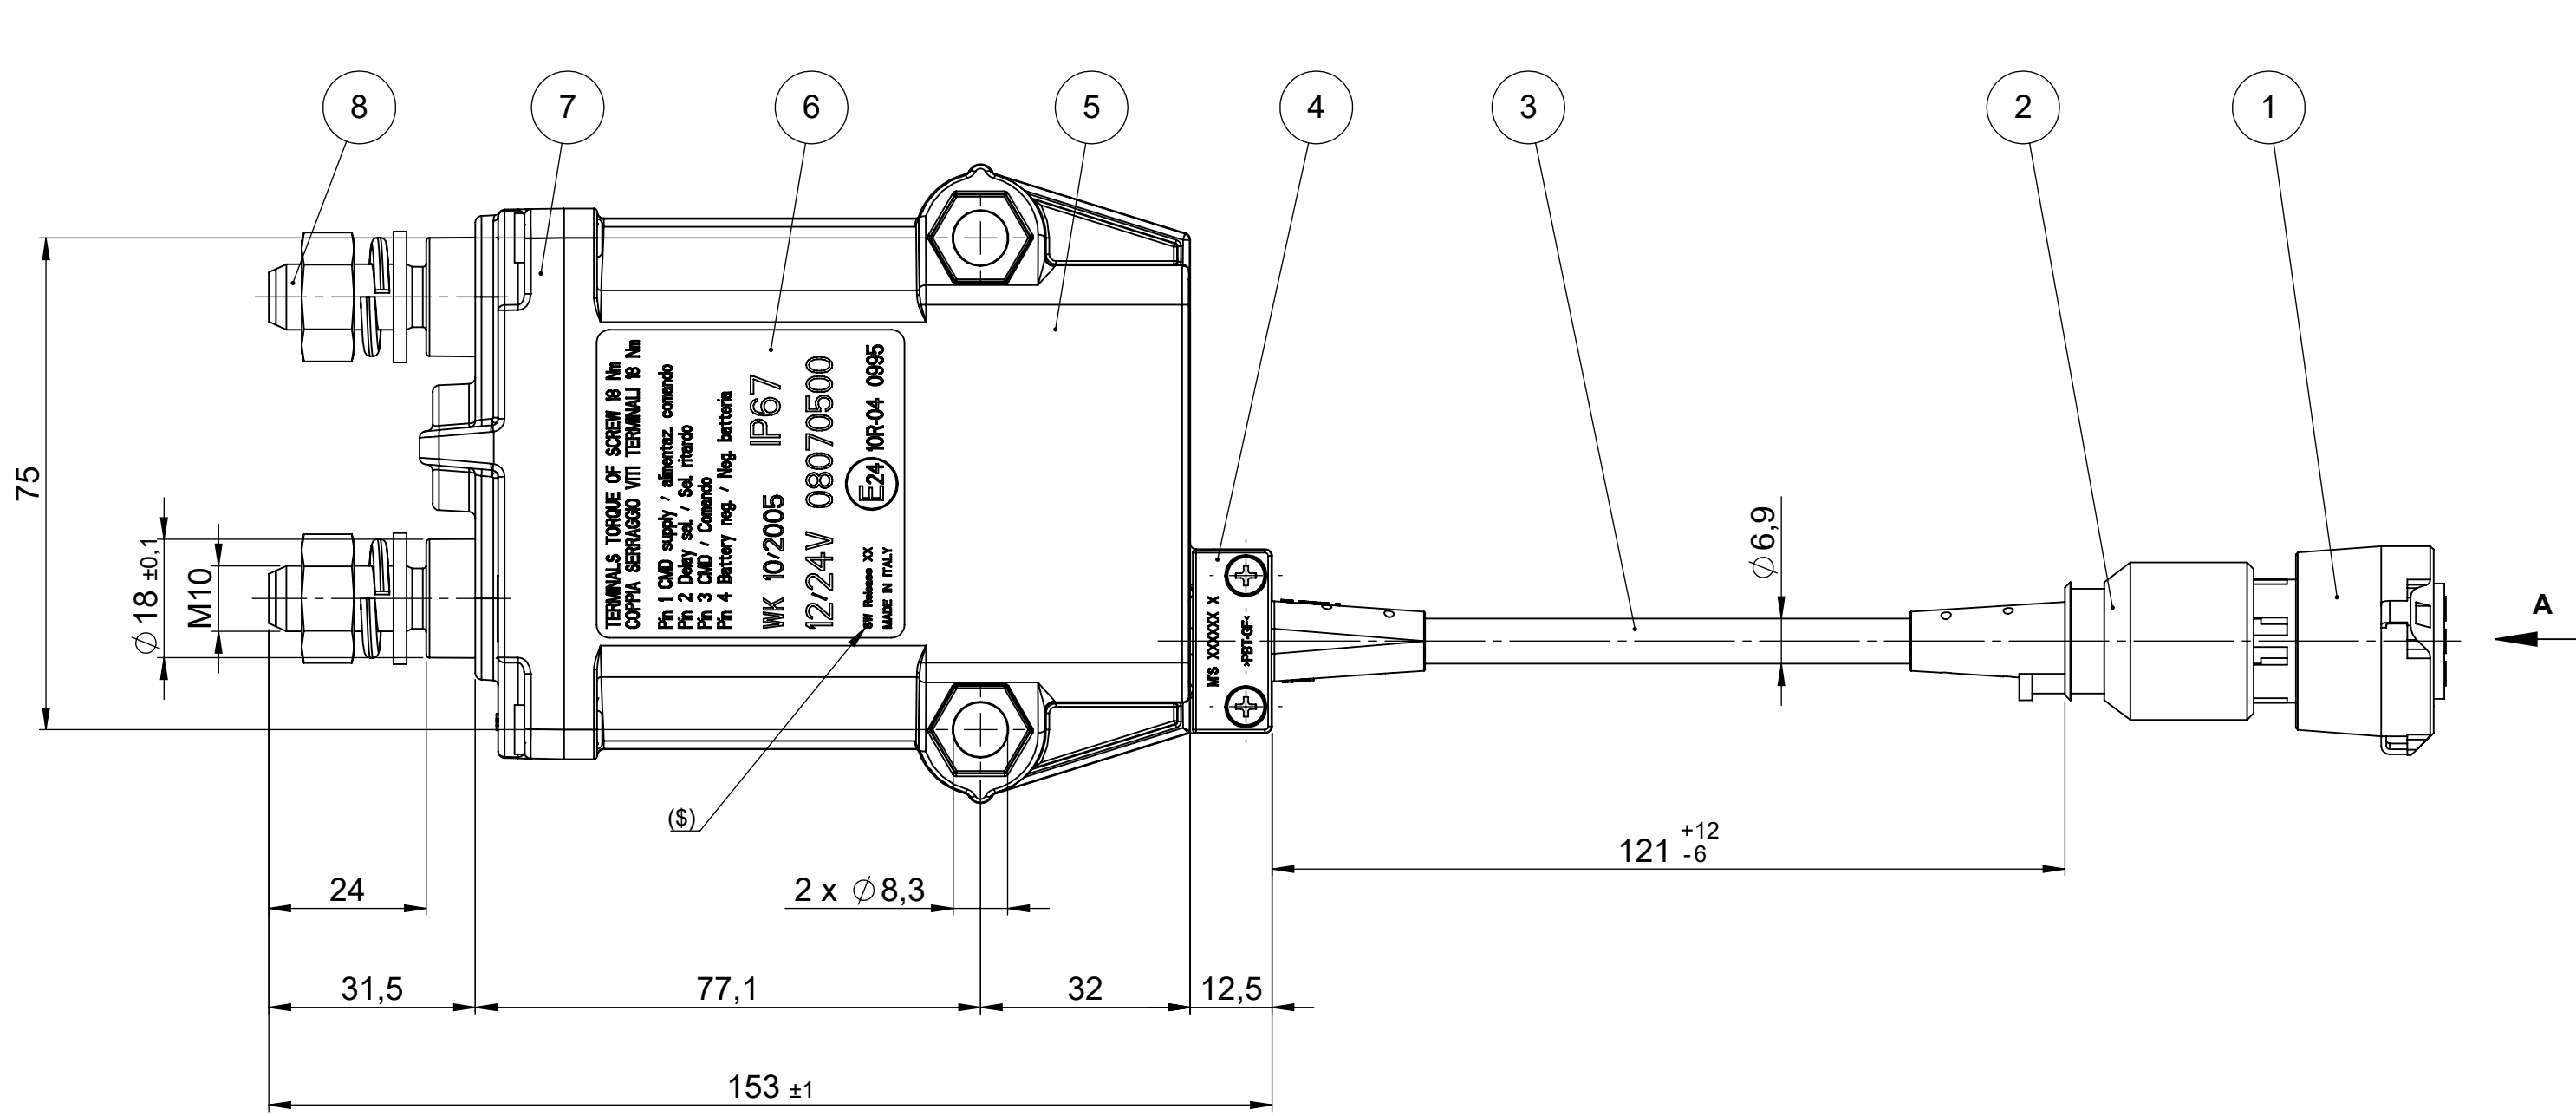

LEGEND

- 1) Plug connector 4 ways DIN 72585-1 ITT CANNON 121583-00 in thermoplastic PBT colour black
- 2) Protection for ITT CANNON connector 058-8578-100 in thermoplastic PBT colour black
- 3) 4 ways wiring 4x1 mm² in thermoplastic PVC colour black
- 4) Cable clamp in thermoplastic PBT colour black
- 5) Box in thermoplastic PBT colour black
- 6) Indestructible adhesive label with manufacturing week and year, P/N and pin-out connections
- 7) Studs holder cover in BMC colour black
- 8) M10 power studs in silver plated copper
- 9) Plane washer in stainless steel
- 10) Spring washer in stainless steel
- 11) M10 nut in stainless steel
- 12) Battery pole red label



FEATURES

- Max continuous current: 250A
- Number of electrical and mechanical cycles: 45.000
- (ϕ): Software Revision

NOTES

- Supplying state: main bridge open
- Components ref.9.10 and 11 are supplied in the kit
- Locking torque nuts M10:18±1Nm
- Fix the device to the structure by means of M8 screws with locking torque 10±2Nm

Mouting template

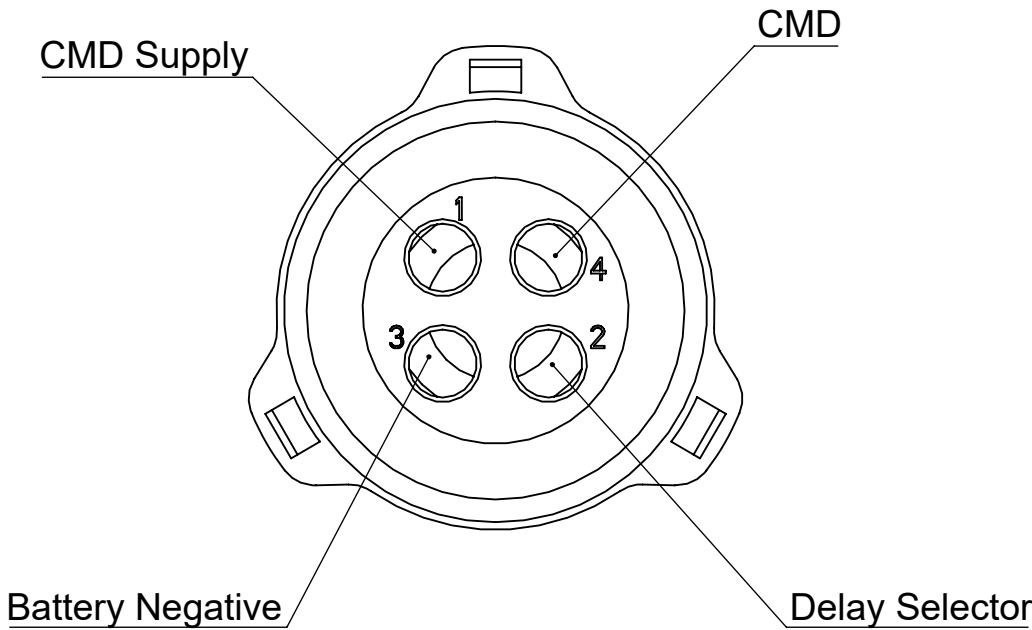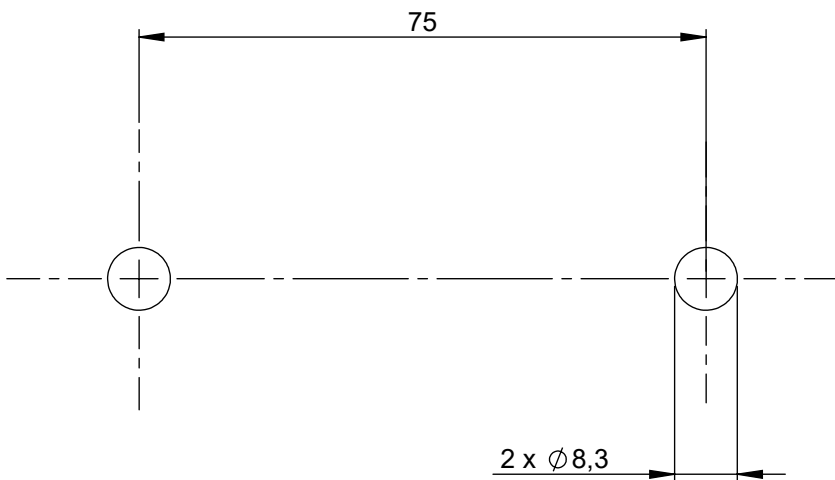

View from "A" - Scale 2:1

SAP drawing number:

Material and treatments:

DIMENSIONS AND TOLERANCES IN MILLIMETERS, DEFINED ACCORDING TO ISO 1101:2017.							
linear dimensions							
0,5	>3	>6	>30	>120	>400	>1000	
±0,2	±0,3	±0,5	±0,8	±1,2	±2	±3	
angle (for range of lengths)							
up to 10	>10	>50	>120	>400	>1000	>2000	
±1°30'	±1°	±0°30'	±0°15'				
● FIT: FUNCTION CRITICAL CHARACTERISTICS SYMBOL							
<S> SAFETY: COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL							
CPK DENOTES CPK DIMENSIONS MINIMUM CPK VALUE							
(ST) DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS							
CP DENOTES CP DIMENSIONS. MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE							
NAME		DATE		 Littelfuse Expertise Applied Answers Delivered			
DRAWN		L. Del Main					
CHECKED				TITLE General Electrical 12/24V Main Switch TGC/RME-MS3 (+)			
FORM NO. CVP-RE-02013 REV. A				SIZE A1			
FIRST ANGLE PROJECTION				DWG. NO. OL-08070500			
				SHEET 1 OF 1			
DO NOT SCALE DRAWING				SCALE 1:1			